
FED. SUP CLASS
5306

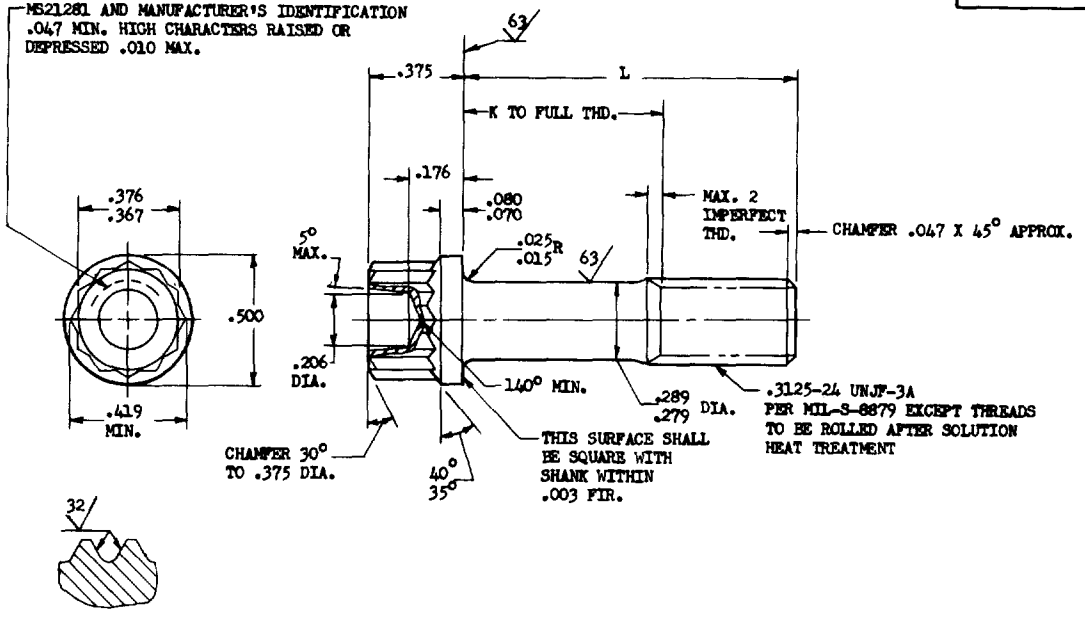

SECTION THRU THREAD PROFILE

PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100
MS21281-04	.500	(a)	2.14	MS21281-22	1.625	.750	4.10	MS21281-40	3.750	2.875	7.95
MS21281-05	.562	(a)	2.21	MS21281-23	1.688	.812	4.22	MS21281-41	3.875	3.000	8.17
MS21281-06	.625	(a)	2.28	MS21281-24	1.750	.875	4.33	MS21281-42	4.000	3.125	8.40
MS21281-07	.688	(a)	2.39	MS21281-25	1.875	1.000	4.55	MS21281-43	4.125	3.250	8.63
MS21281-08	.750	(a)	2.51	MS21281-26	2.000	1.125	4.77	MS21281-44	4.250	3.375	8.86
MS21281-09	.812	(a)	2.62	MS21281-27	2.125	1.250	5.00	MS21281-45	4.375	3.500	9.08
MS21281-10	.875	(a)	2.73	MS21281-28	2.250	1.375	5.23	MS21281-46	4.500	3.625	9.30
MS21281-11	.938	(a)	2.85	MS21281-29	2.375	1.500	5.45	MS21281-47	4.625	3.750	9.52
MS21281-12	1.000	.125	2.96	MS21281-30	2.500	1.625	5.67	MS21281-48	4.750	3.875	9.74
MS21281-13	1.062	.188	3.07	MS21281-31	2.625	1.750	5.90	MS21281-49	4.875	4.000	9.95
MS21281-14	1.125	.250	3.19	MS21281-32	2.750	1.875	6.13	MS21281-50	5.000	4.125	10.17
MS21281-15	1.188	.312	3.30	MS21281-33	2.875	2.000	6.36	MS21281-51	5.125	4.250	10.40
MS21281-16	1.250	.375	3.41	MS21281-34	3.000	2.125	6.58	MS21281-52	5.250	4.375	10.63
MS21281-17	1.312	.438	3.52	MS21281-35	3.125	2.250	6.80	MS21281-53	5.375	4.500	10.86
MS21281-18	1.375	.500	3.64	MS21281-36	3.250	2.375	7.03	MS21281-54	5.500	4.625	11.10
MS21281-19	1.438	.562	3.75	MS21281-37	3.375	2.500	7.27	MS21281-55	5.625	4.750	11.33
MS21281-20	1.500	.625	3.87	MS21281-38	3.500	2.625	7.50	MS21281-56	5.750	4.875	11.56
MS21281-21	1.562	.688	3.98	MS21281-39	3.625	2.750	7.73	MS21281-57	5.875	5.000	11.78
								MS21281-58	6.000	5.125	12.00

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS. EXCEPT INCOMPLETE THREADS NOT TO ENTER FILLET RADIUS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON O.D. SHALL BE WITHIN .015 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735.
MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEADS TO BE FORMED BY HOT OR COLD UPSETTING
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645
SURFACE ROUGHNESS: MIL-STD-10 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 1 May 61 REVISED (A) 23 Oct 61 (B) 17 Sep 63

This standard, ...an approved by (...)Wep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - Wep Other Cust Air Force - ASD	TITLE BOLT, MACHINE - STEEL, DOUBLE HEXAGON, EXTENDED WASHER, .3125-24 (MIL-S-8879 THREAD) (B)	MILITARY STANDARD MS21281 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.