
FED. SUP CLASS
5940

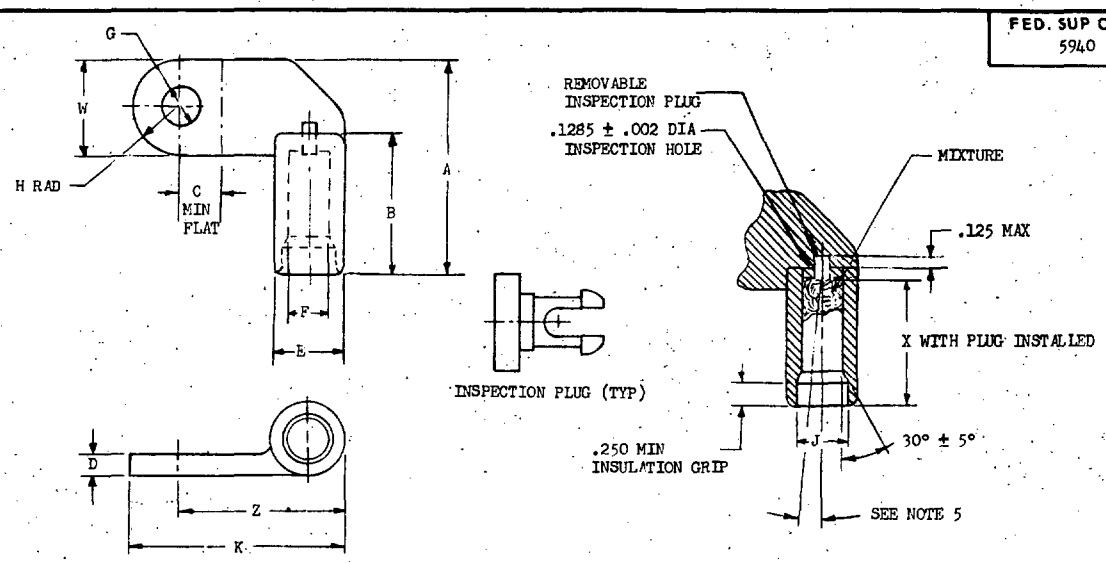

DASH NO.	CABLE SIZE	STUD SIZE	A ±.032	B ±.025	C ±.020	D ±.015	E ±.020	F ±.003	G DIA MAX	G DIA MIN	H ±.008	K ±.035	J DIA ±.010	W ±.016	Z ±.024	X ±.020
-1	8	NO. 10	1.617	1.067	.372	.096	.355	.167	.203	.193	.344	1.095	.250	.688	.751	.880
-2		1/4							.285	.260						
-3		5/16			.466				.343	.320	.437	1.342		.875	.905	
-4		3/8	1.808						.410	.385						
-5	6	NO. 10	1.742	1.192	.372	.112	.413	.219	.203	.193	.344	1.230	.313	.688	.886	1.005
-6		1/4							.285	.260						
-7		5/16	1.935		.466				.343	.320	.437	1.400		.875	.963	
-8		3/8							.410	.385						
-9	4	NO. 10	1.867	1.317	.372	.128	.510	.273	.203	.193	.344	1.250	.375	.688	.906	1.130
-10		1/4							.285	.260						
-11		5/16	2.055		.466				.343	.320	.437	1.500		.875	1.063	
-12		3/8							.410	.385						
-13	2	1/4	2.196	1.458		.143	.601	.342	.285	.260			.469			1.271
-14		5/16							.343	.320	.437	1.600			1.163	
-15		3/8							.410	.385						
-16		1/2	2.508		.622				.535	.510	.593	1.900		1.187	1.307	
-17	1	1/4	2.196		.466		.633	.376	.285	.260						
-18		5/16							.343	.320	.437	1.615	.516	.875	1.178	
-19		3/8							.410	.385						
-20		1/2	2.508		.622				.535	.510	.593	1.935		1.187	1.342	
-21	0	1/4	2.240	1.520	.466	.159	.699	.425	.285	.260						1.333
-22		5/16							.343	.320	.437	1.710	.563	.875	1.273	
-23		3/8							.410	.385						
-24		1/2	2.570		.622				.535	.510	.593	2.015		1.187	1.422	
-25	00	5/16	2.323	1.582	.466	.190	.789	.485	.343	.320						1.395
-26		3/8							.410	.385	.437	1.795	.625	.875	1.358	
-27		1/2	2.632		.622				.535	.510	.593	2.105		1.187	1.512	
-28	000	3/8	2.505	1.645	.551		.836	.547	.410	.385	.500	1.994	.703	1.000	1.424	1.458
-29		1/2	2.695		.622				.535	.510	.593	2.145		1.187	1.552	
-30	0000	3/8	2.663	1.801	.551	.206	.947	.594	.410	.385	.500	2.103	.766	1.000	1.603	1.614
-31		1/2	2.851		.622				.535	.510	.593	2.265		1.187	1.672	

NOTES:
1. MATERIAL: WROUGHT ALUMINUM, MINIMUM CONDUCTIVITY 57% IACS.
2. TONGUE HARDNESS
   MAXIMUM ROCKWELL H-95
   MINIMUM ROCKWELL H-65
   BARREL HARDNESS
   MAXIMUM ROCKWELL H-35
3. TONGUE SURFACES PARALLEL WITHIN .005 INCHES. TONGUE SURFACE FINISH TO BE 63 MICROINCHES MAXIMUM BEFORE PLATING.
4. TERMINAL SHALL BE OF ONE PIECE CONSTRUCTION.
5. A MAXIMUM OF 5° PERMITTED IN UNCRIMPED TERMINALS. AFTER CRIMPING, THE CENTER LINE OF THE BARREL SHALL BE PARALLEL WITHIN ±1° WITH THE FLAT OF THE TONGUE.
(A) 6. FINISH: TIN PLATE - ELECTRODEPOSITED .0003 INCH MINIMUM.
7. DIMENSIONS IN INCHES.

(A)

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 25 Jan 61 REVISED (A) 15 May 64

User: None

Reviewer: USAF - 11, 85
Navy = Weps
Army - EL

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. (A)	TITLE	MILITARY STANDARD
Navy-WEPS Other Cust USAF- 11 ARMY- EL	TERMINAL-LUG, CRIMP STYLE, LEFT ANGLE TYPE, FOR ALUMINUM AIRCRAFT WIRE, CLASS 1	MS25437
PROCUREMENT SPECIFICATION MIL-T-7099	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited Coverage)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the correct version before use.