
FED. SUP CLASS
5330

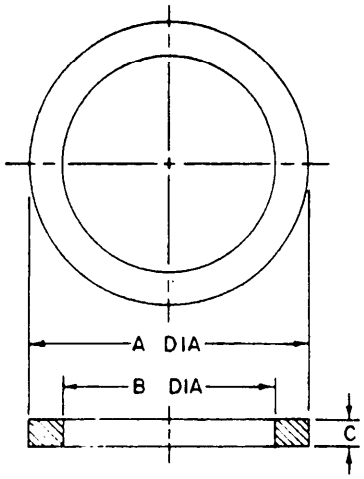

DASH NUMBER	COUPLING NOM. SIZE	DIMENSION (D)		
		A	B	C
- 1	1/2	1.375	.875	.218
- 2	3/4	1.375	.875	.218
- 3	1	1.563	1.063	.250
- 4	1-1/4	1.938	1.359	.250
- 5	1-1/2	2.188	1.625	.250
- 6	2	2.625	2.00	.250
- 7	2-1/2	3.125	2.375	.250
- 8	3	3.719	3.00	.250
- 9	4	4.875	4.00	.250
-10	6	7.063	6.00	.250

MATERIAL: GASKET ANSI/ASTM D 2000-80, GRADE M2BG610 B14EA14EF21F17Z1Z2.

Z1: THE COMPRESSION SET AFTER 22 HRS @ 70°C SHALL NOT EXCEED 60% WHEN PERFORMED IN ACCORDANCE WITH ANSI/ASTM D 395-78.
WHEN POLYURETHANES ARE SELECTED USE THE FOLLOWING WATER RESISTANCE TEST:
Z2: AFTER 14 DAYS IN DISTILLED WATER @ 70°C THE MAXIMUM CHANGE IN STRENGTH WILL BE -40% WHEN PERFORMED IN ACCORDANCE WITH ANSI/ASTM D 471-79.

(D) DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

TOLERANCES: FRACTIONS + 1/32, -1/64, DECIMALS ± .005.

PART NUMBER: THE MS NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER.
EXAMPLE: MS27030-1

NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG No. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(D) DENOTES CHANGES

APPROVED 23 SEPTEMBER 1960 REVISED (A) 26 FEBRUARY 1970 (B) 19 AUGUST 1975 (C) 15 JUN 82 (D) 4 OCTOBER 1965

USER ACTIVITIES:
NAVY - MC

REVIEW ACTIVITIES:
ARMY - AV, GL
AIR FORCE-82
DLA-CS, IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document when applicable.

P.A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ME NAVY - YD AF - 99	STANAG NO. 2761 QSTAG 240	GASKET-COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE	MS 27030
PROCUREMENT SPECIFICATIONS MIL-C-27487	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. (5330-0598)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13:52
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.