
FED. SUP CLASS
5950

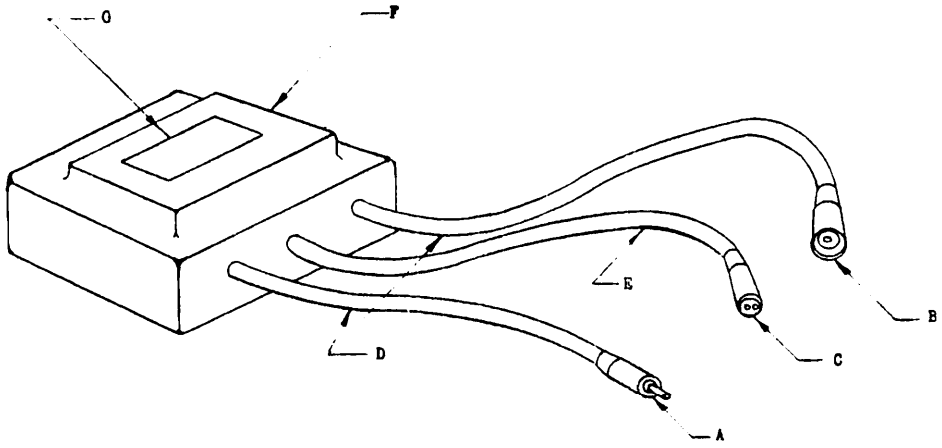

ELECTRICAL CHARACTERISTICS

PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS A	LOAD A	
6.6	95	90		19.8-20.2	1.8 OHMS	(a)
6.6				20 -22	SHORT CIRCUITED	
6.6			70	0	OPEN CIRCUITED	
5.2				15.6-16.3	0.6 OHMS	(a)
4.1				12.2-12.9	0.5 OHMS	(a)
3.4				10.2-10.8	0.45 OHMS	(a)
2.8				8.4- 8.9	0.4 OHMS	(a)

(a) THE LOAD MAY BE EITHER A 300W, 20A LAMP OR THE OHMIC RESISTANCE SPECIFIED.

A PLUG FIGURE 6a FAA SPECIFICATION L-823.
B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823.
C RECEPTACLE FIGURE 1c FAA SPECIFICATION L-823.
D PRIMARY CABLE.
E SECONDARY CABLE.
F CASE.
G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	LEAD LENGTH INCHES D	E
MS27306-1	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES.

MAXIMUM WEIGHT 20 POUNDS.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 11 Dec 64 REVISED (A) 18 Aug 65

P.A. USAF - 11
Other Cust
Navy - WP

TITLE
TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING, 300W/6.6A/20A/5000V

MILITARY STANDARD
MS27306(ASG)

PROCUREMENT SPECIFICATION SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

...s standard ha...en approved by the Department of the Air Force (11) and the ...artment of the Navy and is mandatory for use by ...activity. All other military activities are required ...employ this standard where suitable.
...eview activities USAF - 85, 11 Navy - WP