INCH-POUND

MS27559C(USAF)
31 January 1994
SUPERSEDING
MS27559B(USAF)
14 November 1977

MILITARY SPECIFICATION SHEET

# SUPPORT, CABLE, RIGHT ANGLED

This specification is approved for use by all Departments of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-26500.

Inactive For Airforce New Design Equipment or Modification of Existing Equipment after 14 November 1977. No Superseding Standard

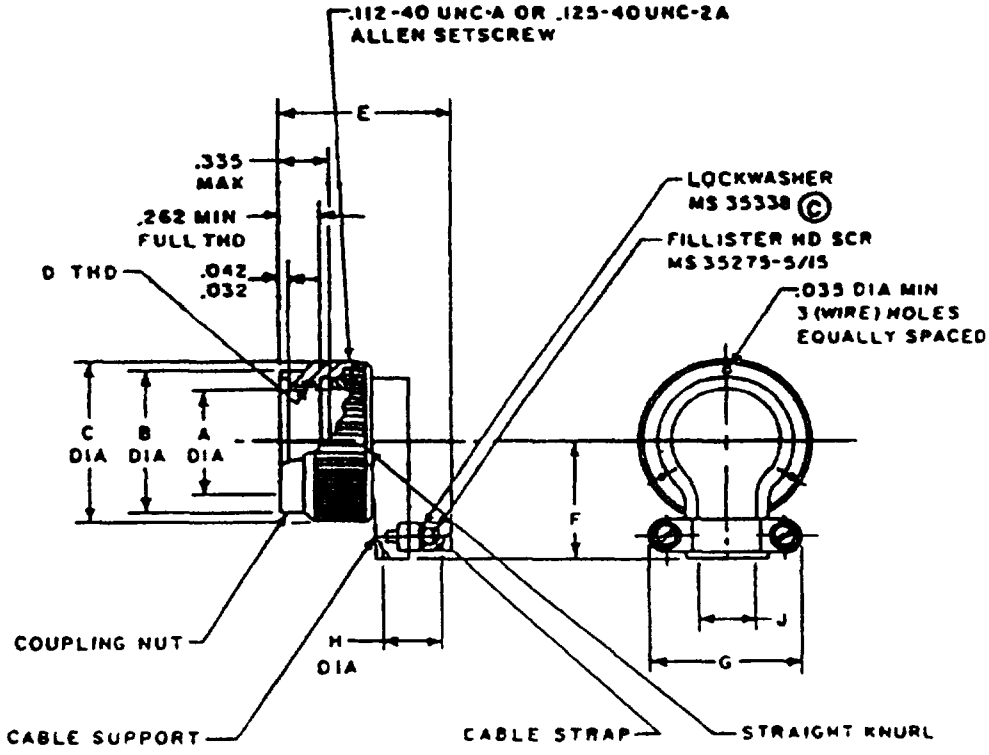



FIGURE 1. Dimensions and configuration

© denotes changes



DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

| MS PART NUMBER | SIZE | A DIA | B DIA MAX | C DIA MAX | D THREAD UNEF-2B | E MAX | F MAX | G MAX | H MAX | J DIA MAX | MAXIMUM WEIGHT IN POUNDS |
|---|---|---|---|---|---|---|---|---|---|---|---|
| MS27559-1 | 8 | .348 | .532 | .672 | .4375-28 | 1.173 | .602 | .892 | .201 | .245 | |
| MS27559-2 | 10 | .440 | .657 | .797 | .5625-24 | 1.293 | .650 | 1.072 | .328 | .370 | |
| MS27559-3 | 12 | .600 | .845 | 1.016 | .750-20 | 1.293 | .740 | 1.072 | .386 | .370 | |
| MS27559-4 | 14 | .684 | .907 | 1.110 | .8125-20 | 1.460 | .775 | 1.108 | .452 | .520 | |
| MS27559-5 | 16 | .789 | 1.032 | 1.234 | .9375-20 | 1.443 | .830 | 1.108 | .508 | .520 | |
| MS27559-6 | 18 | .922 | 1.157 | 1.360 | 1.0625-18 | 1.561 | .897 | 1.233 | .571 | .645 | |
| MS27559-7 | 20 | 1.053 | 1.282 | 1.485 | 1.1875-18 | 1.732 | .955 | 1.477 | .748 | .780 | |
| MS27559-8 | 22 | 1.172 | 1.407 | 1.610 | 1.3125-18 | 1.732 | 1.015 | 1.477 | .748 | .780 | |
| MS27559-9 | 24 | 1.302 | 1.532 | 1.735 | 1.4375-18 | 2.000 | 1.077 | 1.727 | .996 | 1.065 | |

| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .010 | 25 | .520 | 13 21 | .789 | 20.04 | 1.065 | 27.05 | 1.407 | 35 74 |
| .032 | 81 | .532 | 13.51 | .797 | 20.24 | 1.072 | 27.23 | 1.443 | 36.65 |
| .035 | .89 | .571 | 14.50 | .830 | 21.08 | 1.077 | 27.36 | 1.460 | 37.08 |
| .042 | 1.07 | .600 | 15.24 | .845 | 21.46 | 1.108 | 28.14 | 1.477 | 37.52 |
| 201 | 5 11 | .602 | 15.29 | .892 | 22.66 | 1.110 | 28.19 | 1.485 | 37.72 |
| .245 | 6.22 | .645 | 16 38 | .897 | 22.78 | 1.157 | 29.39 | 1.532 | 38.91 |
| .262 | 6.65 | .650 | 16.51 | .907 | 23.04 | 1.172 | 29.77 | 1.561 | 39.65 |
| .328 | 8.33 | .657 | 16.69 | .922 | 23.42 | 1.173 | 29.79 | 1.610 | 40.89 |
| .335 | 8.51 | .672 | 17.07 | .955 | 24.26 | 1.233 | 31.32 | 1.727 | 43.87 |
| .348 | 8.84 | .684 | 17 37 | .996 | 25.30 | 1.234 | 31.34 | 1.732 | 43.99 |
| .370 | 9.40 | .740 | 18.80 | 1.015 | 25.78 | 1.282 | 32.56 | 1.735 | 44.07 |
| .440 | 11.18 | .748 | 19.00 | 1.016 | 25.81 | 1.293 | 32.84 | 2.000 | 50.80 |
| 452 | 11.48 | .775 | 19.68 | 1 032 | 26.21 | 1.302 | 33.07 | | |
| .508 | 12 90 | 780 | 19.81 | 1.053 | 26.75 | 1.360 | 34.54 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010

FIGURE 1 Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 202610-23T16:43Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and construction

Dimensions and configuration: See figure 1.

Coupling nut securely captivated to cable support and has provisions for locking in an indexed position

Material and finish.

Aluminum components: Anodize in accordance with MIL-A-8625 or suitable hard anodizing process to meet the performance requirements of MIL-C-26500

Cable support material Aluminum alloy in accordance with QQ-A-591 composition 13, A13, A380, or 380

Coupling nut material Aluminum alloy in accordance with QQ-A-225 or QQ-A-367

Threads In accordance with MIL-S-7742

CONCLUDING MATERIAL

Custodian
Air Force - 85

Review activities
Air Force - 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-F514)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.