

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 4820

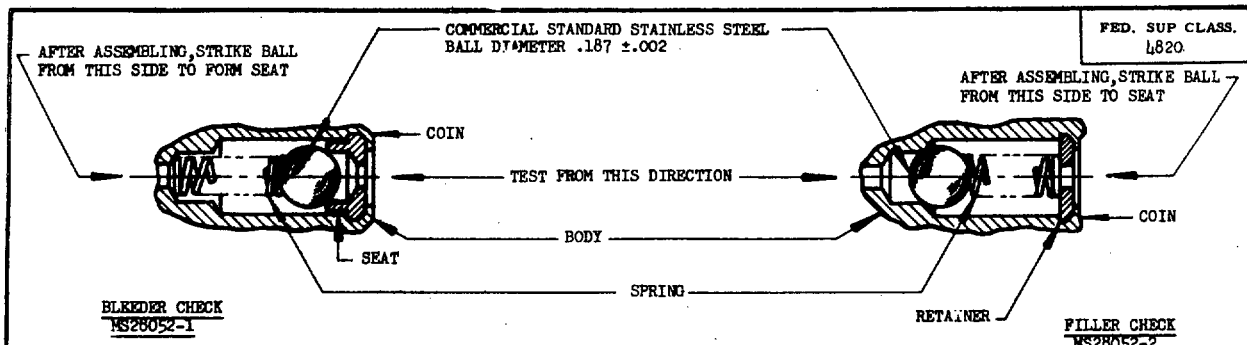


BLEEDER CHECK MS28052-1

FILLER CHECK MS28052-2

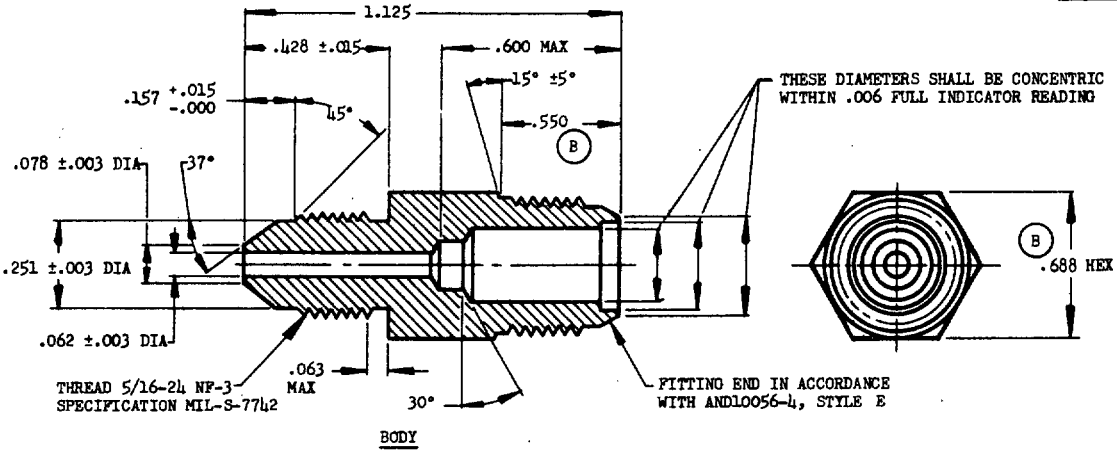


BODY

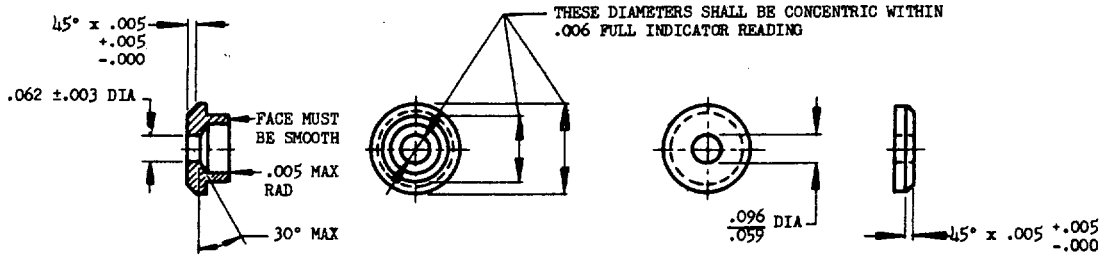

SEAT

RETAINER



SPRING

MS PART NO.	FIIN	ITEM	BOSS
MS28052-1		BLEEDER CHECK VALVE	AND10050-4
MS28052-2		FILLER CHECK VALVE	

MATERIAL: SPRING, PHOSPHOR BRONZE, SPECIFICATION QQ-W-401.
ALL OTHER PARTS, BRASS, SPECIFICATION QQ-B-626, COMPOSITION 22 HALF HARD.
FINISH: MS28052-1, ALUMINUM OR BRASS.
MS28052-2, ANY BLACK OXIDIZING FINISH.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±1/2°.
INTERNAL DESIGNS OTHER THAN THE ABOVE SHALL BE ACCEPTABLE, PROVIDED EXTERNAL DIMENSIONS AND PERFORMANCE REQUIREMENTS ARE MET.
VALVE TO HOLD, WITH SLIGHT LEAKAGE, TO 2 PSI, AND TO BREAK OPEN BETWEEN 2 AND 5 PSI. MAXIMUM LEAKAGE UNDER 2 PSI TO BE 50 CUBIC CENTIMETERS OF AIR PER MINUTE.
STAMP LETTER B ON MS28052-1 AND LETTER F ON MS28052-2 ON THREE ALTERNATE HEXAGON FLATS AND FILL WITH BLACK AND WHITE ENAMEL, RESPECTIVELY, SPECIFICATION MIL-E-7729. STAMP MS PART NUMBER ON FLATS OF HEXAGON. ALL MARKINGS TO BE NOT LESS THAN .062 HIGH BY .016 DEEP BY .016 LINE WIDTH.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 29 Sep 55 REVISED (A) 20 Apr 56 (B) 29 Nov 56

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS28052 (ASG)
Navy - BuAer Air Force	A - N - AF -	VALVE, CHECK, PRESSURE GAGE LINES BLEEDER AND FILLER	
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.