
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

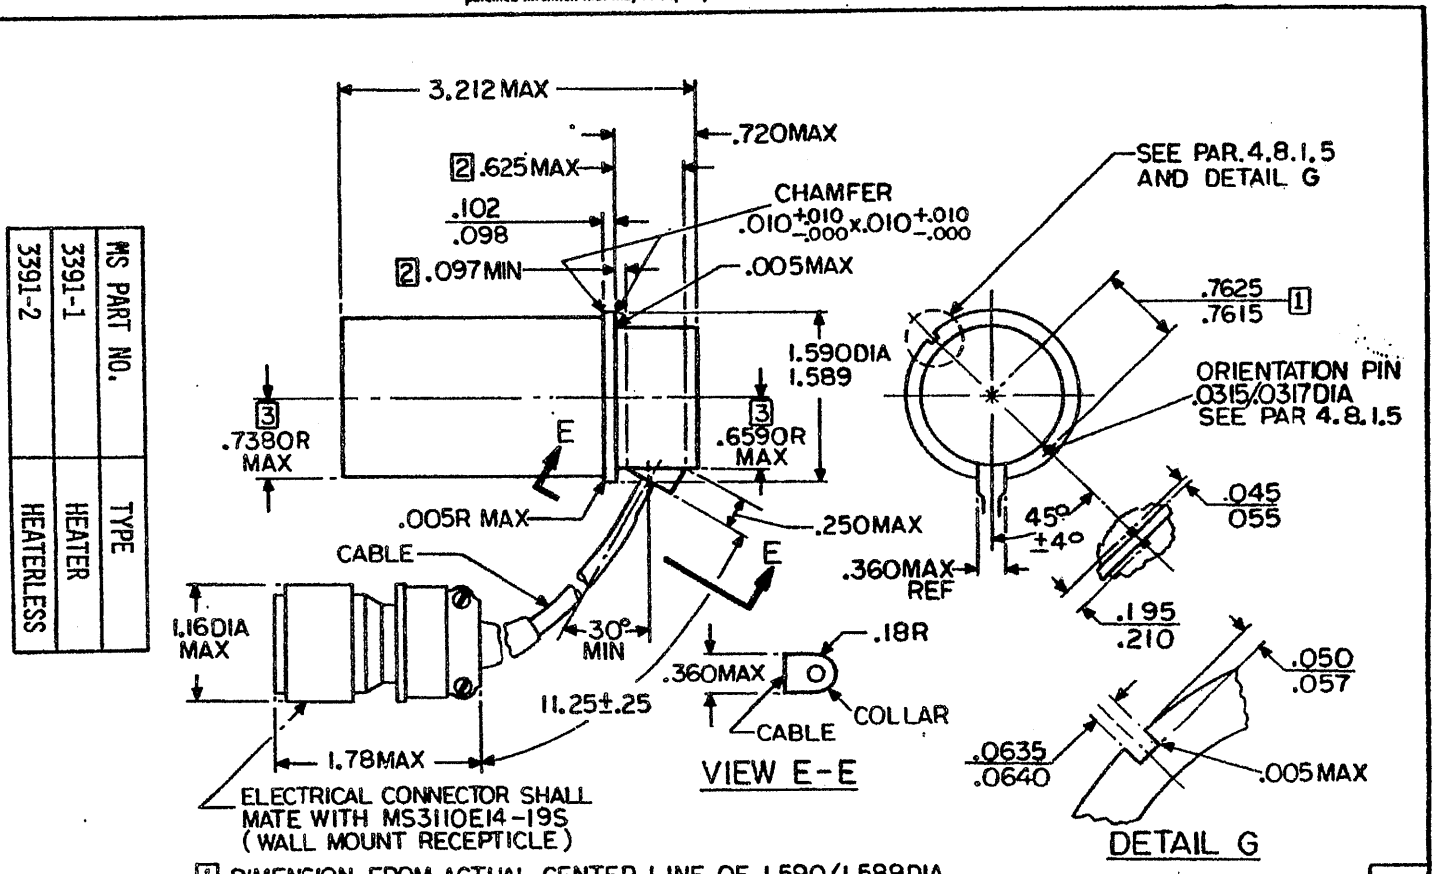

MS PART NO.	TYPE
3391-1	HEATER
3391-2	HEATERLESS

1 DIMENSION FROM ACTUAL CENTER LINE OF 1.590/1.589DIA.
2 DIMENSION FROM FLANGE TO INTERSECTION OF COLLAR WITH .6590MAX.
3 MAX RADIUS NOTED TO BE MEASURED FROM ACTUAL CENTER LINE OF 1.590/1.589DIA.
NOTE: MATING PIN FOR NOTCH ALIGNMENT SHALL BE .090 MIN. IN LENGTH.

PROJECT NUMBER 1420-NO11

P.A. NAVY NASC
Other Cust

TITLE: RATE INTEGRATING GYRO

Procurement Specification: MIL-R-23750A(AS)

SUPERSEDES:

MILITARY STANDARD

MS 3391(AS)

SHEET 1 OF 1

FED. SUP CLASS 1420

APPROVED 1 AUGUST 1968 REVISED

DD FORM 1 SEP 67 672 COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
0102 006 8900

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:03Z
Check the source to verify that this is the current version before use.