
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

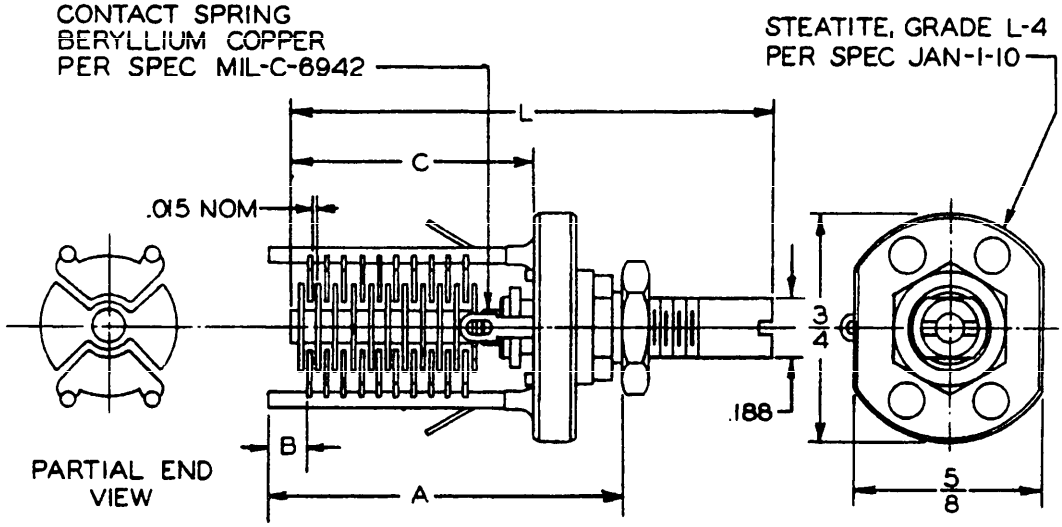

DASH NO.	CAPACITANCE		DIMENSIONS			
	MIN	MAX	A	B	C	L
1	3.20 UUF	11.00 UUF	1 11/64	5/32	53/64	1 37/64

NOTES:

1. TOLERANCES ON DECIMAL ±.005, FRACTIONS ±1/64.
2. NICKEL COAT ALL METAL PARTS PER U. S. ARMY SPECIFICATION 72-53, TABLE II, TYPE II.
3. CAPACITORS SHALL BE USED ONLY WHEN RALATIVELY FEW ADJUSTMENTS WILL BE REQUIRED THROUGHOUT THE LIFE OF THE EQUIPMENT.
4. THE TORQUE REQUIRED TO START AND TURN THE ROTOR OF THE CAPACITOR SHALL BE BETWEEN 5 AND 12 OUNCE INCHES.
5. AT MINIMUM CAPACITANCE, Q SHALL BE 250 OR GREATER.
6. THE CAPACITORS SET AT MAXIMUM CAPACITANCE SHALL WITHSTAND A VOLTAGE OF 600V RMS-60 CYCLES, WITHOUT SUSTAINED FLASHOVER OR BREAKDOWN.
7. THE INSULATION RESISTANCE WHEN MEASURED BETWEEN ROTOR AND STATOR AT 25°C SHALL BE AT LEAST 10,000 MEGOHMS.

APPROVED 24 JULY 1951 REVISED (A) 17 MAY 1952

ALL DIMENSIONS IN INCHES

CUSTODIAN	MILITARY STANDARD	MS 35039 (SIG C)
SIGNAL CORPS	CAPACITOR, AIR DIELECTRIC, VARIABLE (BUTTERFLY)	SHEET 1 OF 1
PROCUREMENT SPECIFICATION		

MS FORM 1 NOV 50 233

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.