FED. SUP CLASS
5305

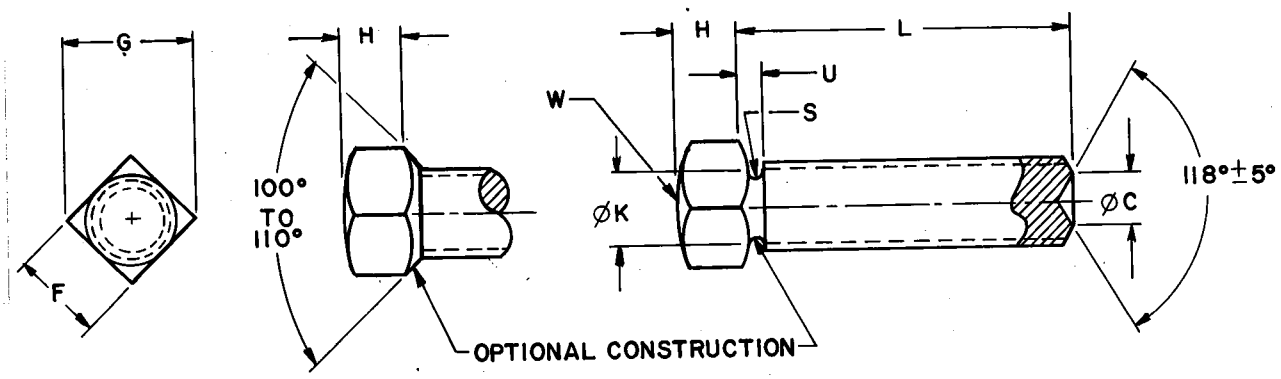


TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE		.375	.500	.750
THREADS PER INCH UNC-2A		16	13	10
F - WIDTH ACROSS FLATS	MAX	.375	.5000	.750
	MIN	.362	.4840	.729
G - WIDTH ACROSS CORNERS	MAX	.520	.7070	1.060
	MIN	.497	.6650	1.001
H - HEIGHT OF HEAD	MAX	.293	.3890	.582
	MIN	.270	.3610	.544
S - RADIUS OF NECK RELIEF	MAX	.041	.0500	.065
Ø K - DIAMETER OF NECK RELIEF	MAX	.294	.4000	.620
	MIN	.279	.3850	.605
U - WIDTH OF NECK RELIEF	MAX	.125	.1540	.200
W - RADIUS OF HEAD		.940	1.2500	1.880
Ø C - DIAMETER OF POINT	MAX	.212	.2910	.450
	MIN	.194	.2700	.425

L LENGTH	TOLERANCE OVER .625	DASH NO	DASH NO	DASH NO
2.500	+.000	1		4
3.000	-.180	2	3	

USER ACTIVITIES:
ARMY-ME,MI
NAVY-MC,OS

REVIEWER ACTIVITIES:
ARMY-EA
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84 REVISED

P.A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust SH 99		SETSCREW, SQUARE HEAD, CUP POINT, CARBON STEEL, UNC-2A	MS51487
PROCUREMENT SPECIFICATION FF-S-210	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) New issue is NOT COMPLETE 5305-1495

Source: https://assist.dla.mil -- Downloaded: 20260129T183852Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
ARMY-ME, MI
NAVY-MC, OS

REVIEWER ACTIVITIES:
ARMY-EA
DLA-IS
NSA-NS

REQUIREMENTS:

1. MATERIAL. CARBON STEEL SHALL BE IN ACCORDANCE WITH ASTM A29-79 GRADE 1010 (UNS G10100) THRU GRADE 1020 (UNS G10200), GRADE 1035 (UNS G10350) THRU GRADE 1045 (UNS G10450), GRADE 1137 (UNS G11370) THRU GRADE 1144 (UNS G11440), GRADE 12L13 (UNS G12134) OR GRADE 12L14 (UNS G12144), IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2. HARDNESS. 30-37HRC OR MAY BE SURFACE HARDENED TO NOT LESS THAN 50.5HR30N.

3. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 μm), TYPE II.

4. THREADS. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

5. PART NUMBER: THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS51487-1 - SETSCREW, SQUARE HEAD, CUP POINT, CARBON STEEL, .375-16UNC-2A, LENGTH 2.500, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR / Other Cust SH 99	INTERNATIONAL INTEREST	TITLE: SETSCREW, SQUARE HEAD, CUP POINT, CARBON STEEL, UNC-2A	MILITARY STANDARD MS51487
PROCUREMENT SPECIFICATION: FF-S-210	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITION OBSOLETE 5305-1495

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T18:03Z
Check the source to verify that this is the current version before use.