
FED. SUP CLASS
2920

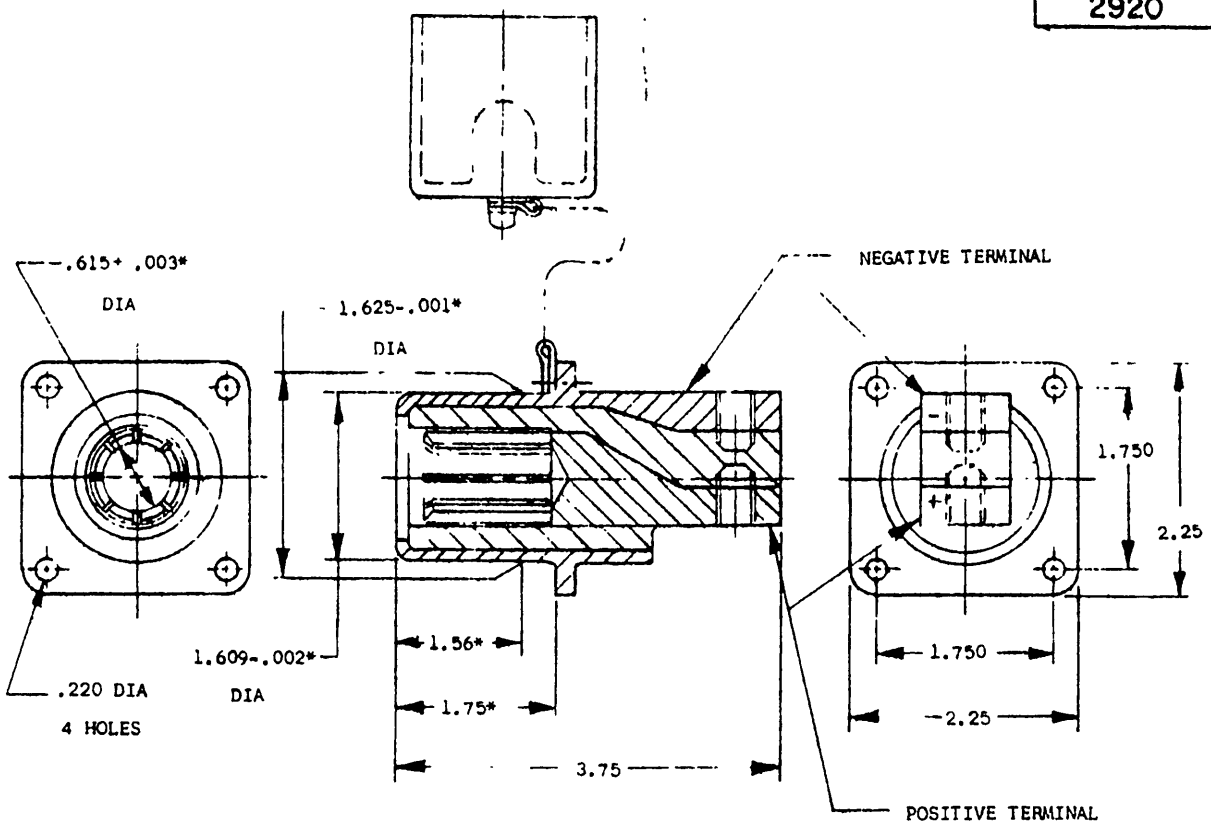

NOTES:

1. FOR MATING PLUG SEE MS 52129 (AT)
2. CONTACT CURRENT RATING IS 500 AMPS AT 24 VOLTS.
3. TERMINALS SHALL WITHSTAND A MINIMUM VOLTAGE DIFFERENCE OF 2500 VOLTS RMS.
4. DIMENSIONS SHOWN ARE IN INCHES.
5. MARKING SHALL CONSIST OF THE MS NUMBER AND OTHER IDENTIFICATION IN ACCORDANCE WITH MIL-C-62122 AND MIL-STD-130.
6. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED THEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS TO BID.
8. DETAILS OF THIS ASSEMBLY SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS (SEE ENGINEERING PARTS LISTS EPL 11682345 AND 11674728) AND MAY BE OBTAINED FROM U. S. ARMY TANK AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48090.

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4074. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

MS PART NO.	ORD. DWG. NO.
52131-1	11682345

P.A. ARMY-AT Other Cust	TITLE CONNECTOR, PLUG, ELECTRICAL INTERVEHICLE POWER CABLE	MILITARY STANDARD MS52131 (AT)
PROCUREMENT SPECIFICATION MIL-C-62122	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2920-0349

APPROVED 17 DEC 1975 REVISED

REVIEW ACTIVITIES ME

USER ACTIVITIES

This military standard is approved by the U. S. Army Tank-Automotive Command, Department of the Army, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.