MILITARY STANDARD

MIL-STD-1386-16
(Navy)


18 AUGUST 1972

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FINS, BOMB TAIL MK 15 MOD 0 AND 1 IN CRATE MK 28 MOD 0 FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING WR-54/119
WEIGHT . . . . . 1178 LBS
DIMENSIONS . . 48 3/4 L x 36 3/8 W x 38 3/16 H
CUBE . . . . . 39.1 CU FT
DOT HAZARD CLASSIFICATION. . . . . INERT
COAST GUARD CLASS . . . . . NONE

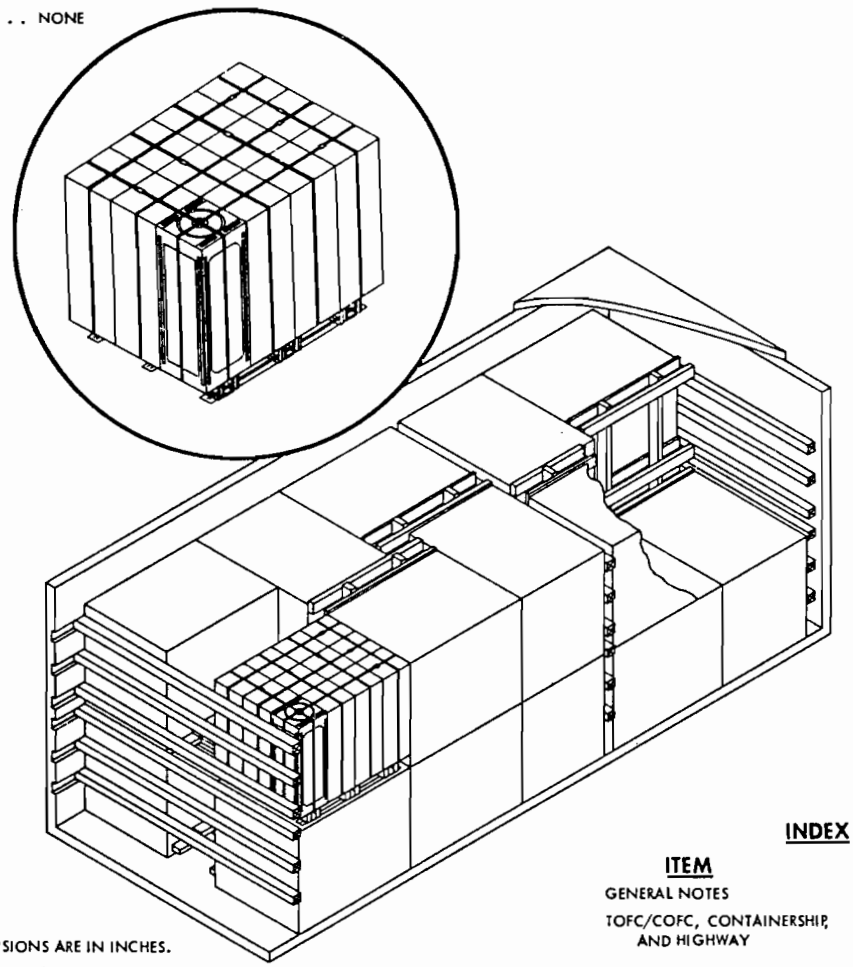

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP, AND HIGHWAY	2 & 3

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO COMPREHENSIVE INDEX NWHL NO. 4200

AUTHORIZED FOR TRAILER-ON-FLATCAR (TOFC), CONTAINER-ON-FLATCAR (COFC), CONTAINERSHIP, AND HIGHWAY SHIPMENTS.

M.S. Gray NWHL 8/2/72
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 8/2/72
SIGNATURE (AIR) SYSCOM BY DIRECTION DATE

ORIGINATOR L.R. Casingi
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF BOMB TAIL FINS MK 15 MOD 0 AND 1 IN CRATE MK 28 MOD 0. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR-54/119.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.
4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

5. THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE.
6. WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL D.
7. APPLICABLE MATERIAL SPECIFICATIONS:
   DUNNAGE LUMBER - FED. SPEC. MM-L-751
   NAILS - FED. SPEC. FF-N-105, COMMON CEMENT COATED
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.


TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1. THE LOADED MILVAN CONTAINER MUST BE ON A 20FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES WHEN BEING MOVED IN TOFC SERVICE.
2. THE LOADED MILVAN CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS IN THE FOLLOWING CONFIGURATIONS:
   A. ONE MILVAN CONTAINER ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
   B. ONE MILVAN CONTAINER ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.


NOTE

IN CERTAIN STATES THE GROSS VEHICLE WEIGHT (G.V.W.) (CONTAINER CHASSIS AND TRACTOR) IS LIMITED BY THE DISTANCE BETWEEN THE 1ST AND THE LAST AXLES OF THE ASSEMBLED RIG. CARE SHOULD BE TAKEN TO SEE THAT THE PROPOSED G.V.W. DOES NOT EXCEED THESE LIMITATIONS.

3. SWAY BRACE, DETAIL C, IS ASSEMBLED IN PLACE. PIECE 4 IS POSITIONED INBOARD OF THE OUTER LEGS OF THE PALLET SKIDS AND PIECE 5 IS POSITIONED AGAINST THE PALLET LEGS. NAIL PIECE 5 TO PIECE 4 WITH THREE 10d NAILS PER JOINT. CUT PIECE 6 TO FIT BETWEEN PIECES 6 AND NAIL TO PIECE 4 WITH THREE 10d NAILS. FABRICATE STOP, PIECES 7 & 8, USING SUFFICIENT LAYERS OF PIECE 8 SO THAT WHEN POSITIONED THE TOP LAYER IS APPROXIMATELY ON A HORIZONTAL LINE WITH THE TOP OF ADJACENT PIECES 2 AND 3 OF DETAIL B. POSITION FORWARD AS FAR AS POSSIBLE AND NAIL AS PERNIALING DATA.

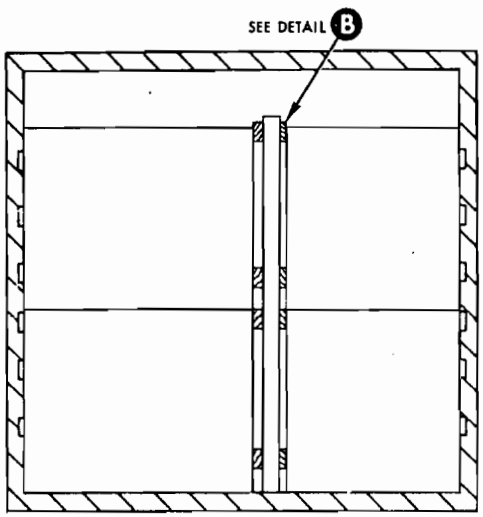


SECTION A-A

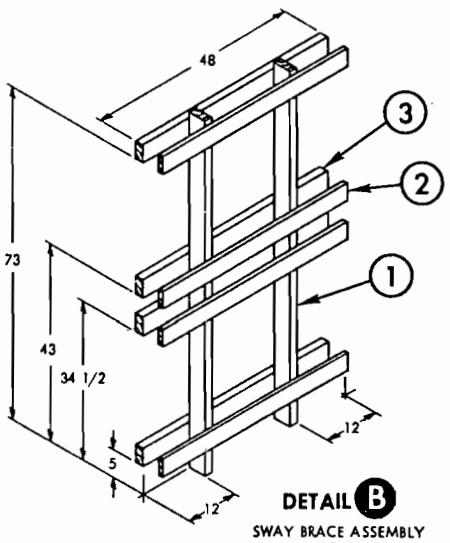


DETAIL B
SWAY BRACE ASSEMBLY
4 REQ'D


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

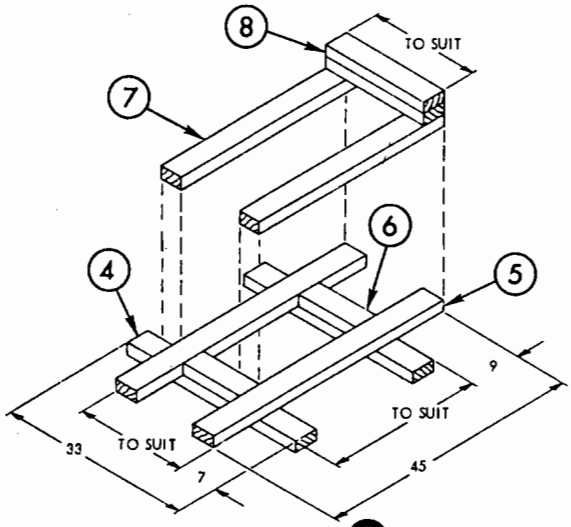

DETAIL C
SWAY BRACE 2 REQ'D
TO BE ASSEMBLED IN PLACE
SEE NOTE 3

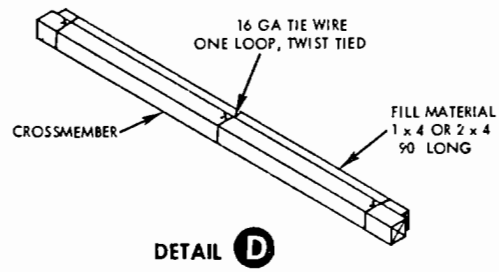


DETAIL D
FILL MATERIAL
SEE GENERAL NOTE 6

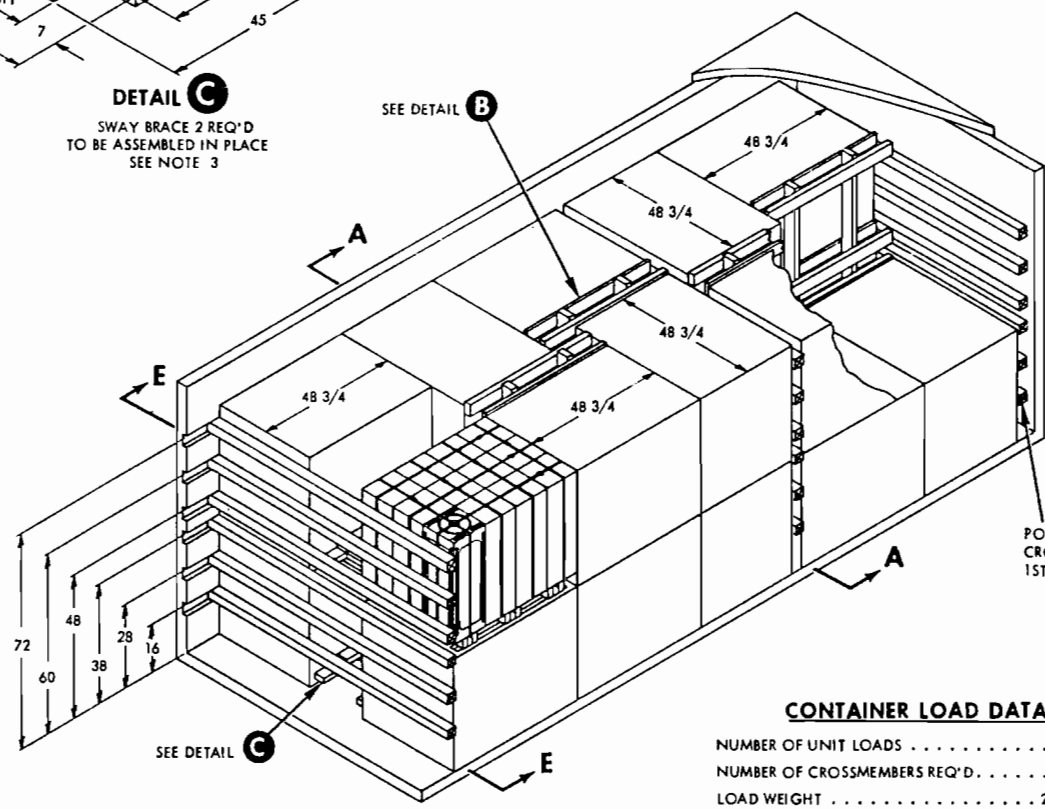

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	20
NUMBER OF CROSSMEMBERS REQ'D	18
LOAD WEIGHT	23,560 LBS
DUNNAGE WEIGHT	327 LBS
CONTAINER WEIGHT	5,785 LBS
GROSS WEIGHT	29,672 LBS

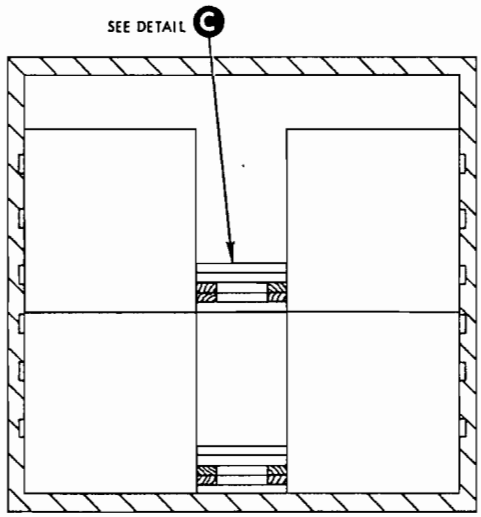

SECTION E-E

* SEE NOTE 3, PAGE 2

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE NAILS
8	LATERAL	2 x 4 x TO SUIT	AS REQ'D*	8	3	10d
				7	3/JOINT	10d
7	LONGITUDINAL	2 x 4 x 36	4 *	5	3	10d
				SEE 8	-	-
6	SPACER	2 x 4 x TO SUIT	4 *	4	3	10d
5	STRINGER	2 x 4 x 45	4 *	4	3/JOINT	10d
4	SUPPORT	2 x 4 x 33	4 *	SEE 5 & 6	-	-
3	HORIZONTAL	2 x 4 x 48	16	1	2/JOINT	10d
2	HORIZONTAL	1 x 4 x 48	16	1	2/JOINT	10d
1	VERTICAL	2 x 4 x 78	8	SEE 2 & 3	-	-

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.