MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FAIRING, UNDERWATER MINE; MK 20 TYPE

FLEET ISSUE UNIT LOAD
DOMESTIC UNIT LOAD

MIL-STD-1386-54 A
(NAVY)

30 SEPTEMBER 1975


SUPERSEDING MIL-STD-1386-54
2 DECEMBER 1974

FLEET ISSUE UNIT LOAD DATA

UNIT LOAD DRAWING..... WR-54/227
WEIGHT (ESTIMATED) .....734 LBS.
DIMENSIONS ..... 57 1/2L x 54 1/2W x 46 5/8H
CUBE..... 85.0 CU. FT.
DOT HAZARD CLASSIFICATION..... INERT
COAST GUARD CLASS ..... NONE

DOMESTIC UNIT LOAD DATA

UNIT LOAD DRAWING WR-53/833
WEIGHT (ESTIMATED) ..... 730 LBS.
DIMENSIONS ..... 57 1/2 L x 54 1/2W x 47 5/8H
CUBE ..... 86.3 CU.FT.
DOT HAZARD CLASSIFICATION ..... INERT
COAST GUARD CLASS ..... NONE

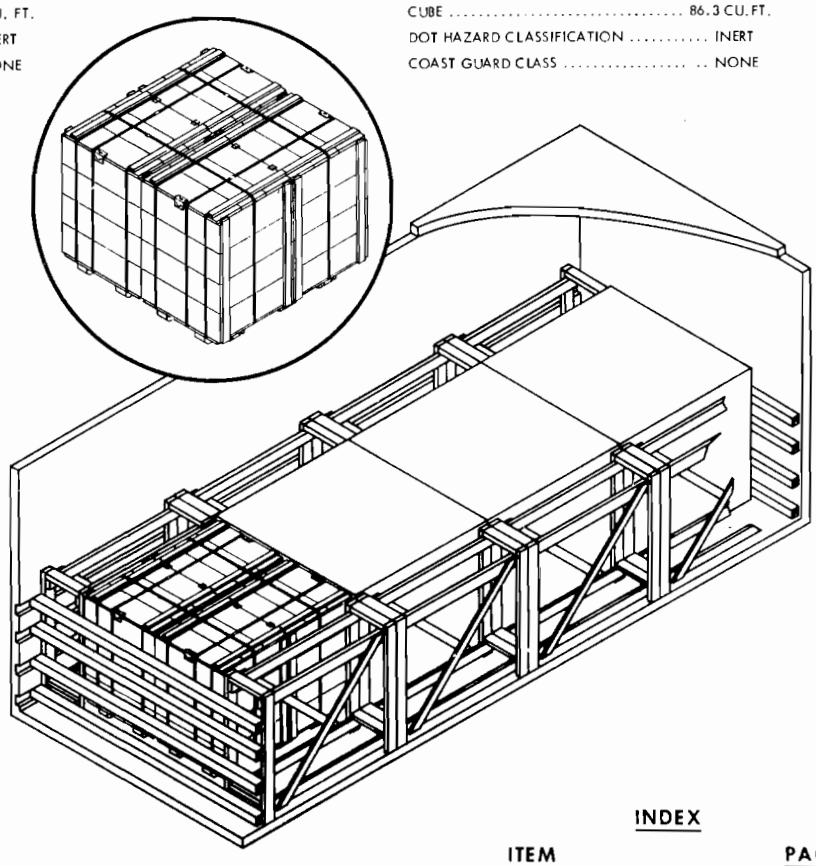

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP AND HIGHWAY	2 & 3

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M. V. Gray NWHL 8/19/75
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J. E. Kelly 9/2/75
SIGNATURE SEASYSCOM, BY DIRECTION DATE

ORIGINATOR P. A. Chene 8/16/75
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE OR DOMESTIC UNIT LOADS OF UNDERWATER MINE FAIRINGS, MK 20 TYPE. THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/277 OR WR-53/833.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.
4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

5. THE SIDE FRAME ASSEMBLIES, DETAIL A, ARE PREASSEMBLED AND SLID INTO PLACE. THE LENGTH OF SPREADER, ITEM 3, SHOULD BE SUFFICIENT TO CAUSE THE ASSEMBLY TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINERS SIDE WALLS. ONE INCH SLACK IS PERMITTED.
6. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND A UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN THE CROSSMEMBER AND UNIT LOAD, AS SHOWN IN DETAIL B.
7. APPLICABLE MATERIAL SPECIFICATIONS:

   DUNNAGE LUMBER - FED. SPEC. - MM-L-751


   NAILS - FED. SPEC. - FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.

TOFC/COFC,CONTAINERSHIP AND HIGHWAY


1. THE CONTAINER LOAD CONSISTS OF 4 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   A. ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH DOUBLE BOGIES AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH DOUBLE BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY THAT MEETS THE REQUIREMENTS OF THE CODE OF FEDERAL REGULATIONS.
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   A. ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   B. TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.

WARNING

CHASSIS CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC CAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.

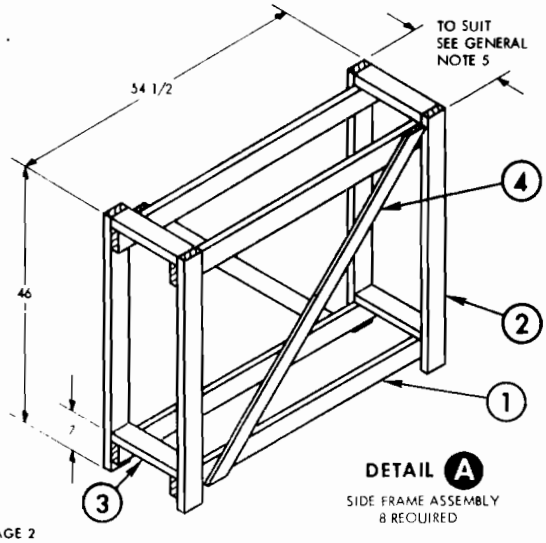

DETAIL A
SIDE FRAME ASSEMBLY
8 REQUIRED

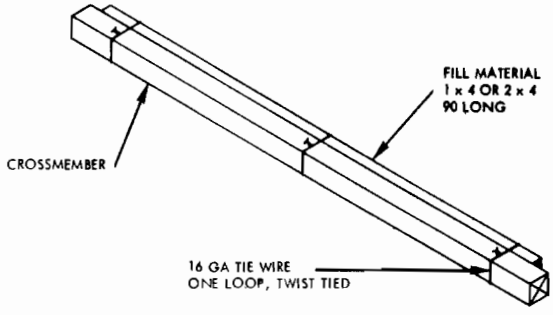



DETAIL B
FILL MATERIAL
SEE NOTE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA

	F.I.U.L.	D.U.L.
NUMBER OF UNIT LOADS	4	4
NUMBER OF CROSSMEMBERS REQ'D	8	8
LOAD WEIGHT (APPROX)	2936 LBS.	2920 LBS.
DUNNAGE WEIGHT (APPROX)	524 LBS.	524 LBS.
CONTAINER WEIGHT	5787 LBS.	5787 LBS.
GROSS WEIGHT (APPROX)	9425 LBS.	9231 LBS.

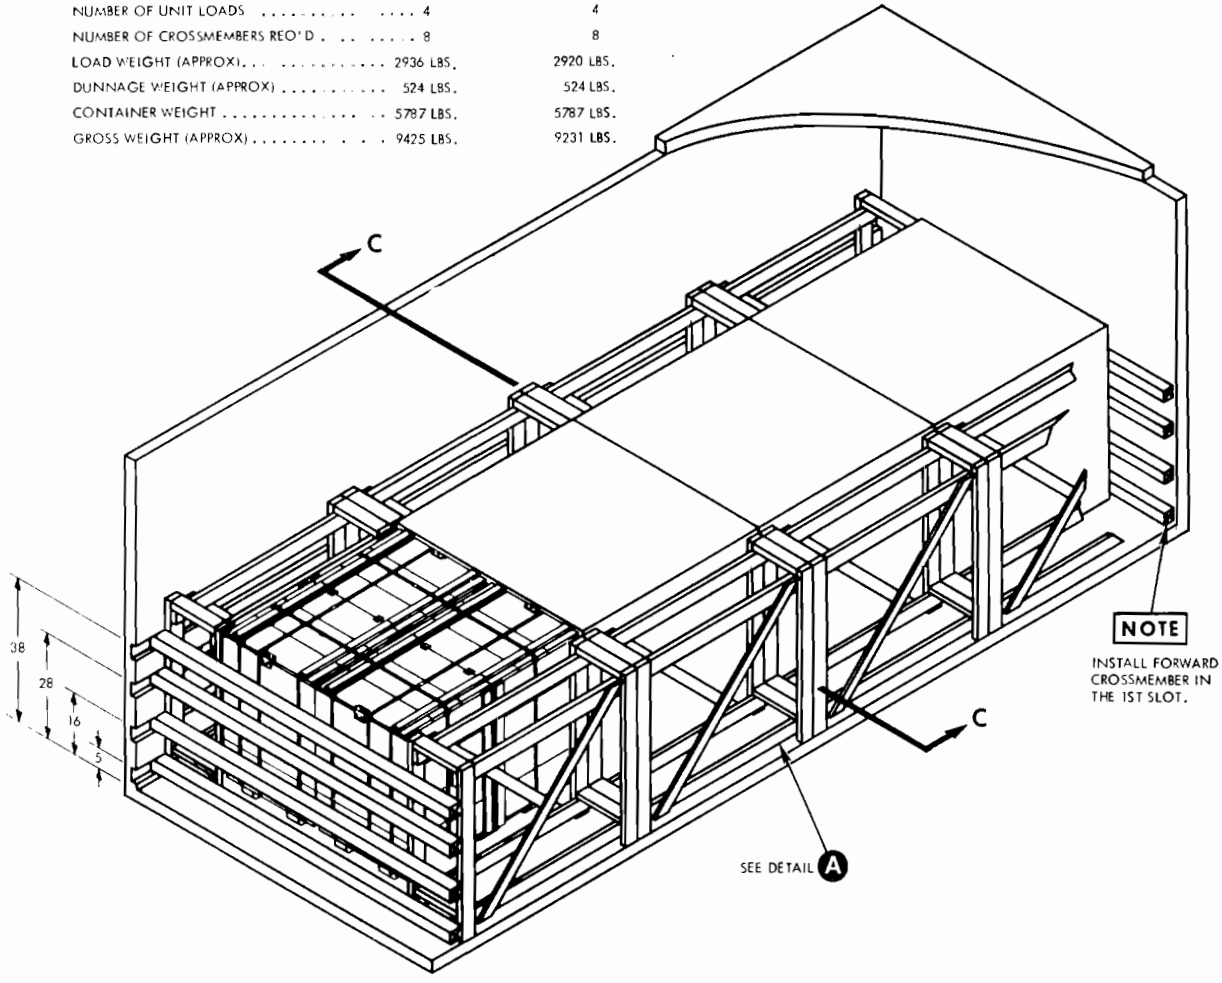

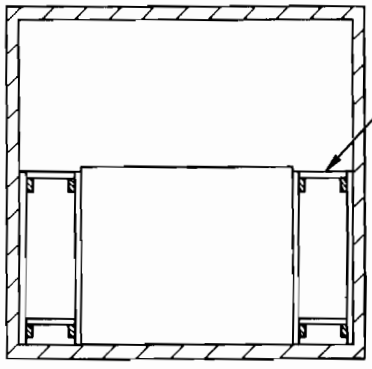

SECTION C-C

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
4	BRACE	1 x 4 x TO SUIT	16	1	3	6d
3	SPREADER	2 x 4 TO SUIT	32	1	2 PER JOINT	12d
2	VERTICAL	2 x 4 x 46	32	SEE 1	-	-
1	HORIZONTAL	2 x 4 x 54 1/2	32	2	3 PER JOINT	10d

LIST OF MATERIALS AND NAILING DATA

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N-301)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.