MIL-C-60104A(MU)
10 August 1967
SUPERSEDING
MIL-C-60104(MU)
11 February 1965

MILITARY SPECIFICATION

CONTAINERS, SHIPPING, REUSABLE: 8246020 AND 10539215

1. SCOPE

1.1 Scope.- This specification covers the fabrication and testing of two types of reusable plastic shipping container assemblies for Gun Direction Computer M18 and the Computer Logic Unit, Test Set AN/GSM-70 (see 6.1).

1.2 Classification.

1.2.1 Types.- The container assemblies shall be of the following types:

Type I - For Computer, Gun Direction: M18 w/Table (see 6.1). The container assembly is identified by Part No. 8246020.

Type II - For Test Set, Computer Logic Unit, AN/GSM-70 (see 6.1). The container assembly is identified by Part No. 10539215.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-E-529	Enamel, Alkyd, Semi-Gloss

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5092	Adhesive, Rubber, Synthetic and Reclaimed Rubber Base
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-W-8604	Welding of Aluminum Alloys, Process For

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel; Packaging of
MIL-C-21567	Compound Silicone, Soft Film
MIL-I-26860	Indicator, Humidity, Plug, Color Change
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46842	Cushioning Material, Unicellular Polyethylene Foam (For Packaging Purposes)

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MIL-STD-417	Rubber Compositions, Vulcanized, General Purpose, Solid (Symbols and Tests)
MS16535	Rivet, Tubular Oval Head

DRAWINGS

U.S. Army, Frankford Arsenal

A8246020	Case, Shipping, for Computer Gun Direction: M18 w/Table
A10533221	Plate, Valve Instruction
A10539215	Case, Shipping, for Test Set, Computer Logic Unit AN/GSM-70
A10539222	Valve, Relief
B8246019	Card Holder
B10533212	Backing Plate
B10553941	Extrusion, Male
B10553942	Extrusion, Female
C10511987	Handle

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

(Copies of tests may be obtained from American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 Reusable containers.- Container assemblies shall be fabricated to provide a pressure tight container capable of protecting equipment against environmental conditions normally encountered during storage and shipment.

3.1.1 Reusable container assembly, Type I.- Reusable container assembly shall be fabricated and assembled in accordance with the requirements specified herein and Figures 1, 2, 3, 4, 5, 6 and 7.

3.1.2 Reusable container assembly, Type II.- Reusable container assembly shall be fabricated and assembled in accordance with the requirements specified herein and Figures 1, 2, 3, 4, 8, 9 and 10.

3.2 Material.- Material used for forming container shells shall be pressed laminated sheets formed of polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used for processing into pressed laminated sheets shall be virgin stock and shall be capable of passing the fungus resistance requirements specified in 3.2.3. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

TABLE I

DETAIL REQUIREMENTS FOR RIGID ABS PLASTICS

	ASTM METHOD*	
Tensile strength, Min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), Min. ft. lb. per inch of notch		
23° ± 2°C (73.4° ± 3.6°F)	D256	5.5
-40° ± 2°C (-40° ± 3.6°F)	Method A	2.0
Specific Gravity		
Min.	D792	1.0
Max.	Method A	1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents
D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Tests for Specific Gravity and Density of Plastics

3.2.1 Color.- Material for forming container shells shall be olive drab conforming to Color X24087 of FED-STD-595. Color match comparison shall be made on the smooth surface. A material swatch shall be submitted for approval prior to production.

3.2.2 Finish.- Material for container shells shall have a hair cell grain on the exterior surface and a smooth surface on the interior surface.

3.2.3 Fungus resistance.- The material used for forming the container shells shall show no evidence of damage, deterioration or profuse growth following an incubation period of 28 days after inoculation of surfaces with a mixed spore suspension, when tested in accordance with Procedure I of MIL-E-5272.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

3.3 Fabrication.

3.3.1 Shell forming process.- The upper and lower shells shown in Figures 2 and 3 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes, with no vacuum vent or thermal shock stress marks visible on outside surfaces of formed piece.

3.3.2 Sealing extrusions.- The upper sealing extrusion (male) shall conform to Drawing B10553941 and the lower sealing extrusion (female) shall conform to Drawing B10553942. The extrusions shall be formed to mate with container shells by proven techniques and controlled tooling to provide uniformity in flatness and alignment as shown on Figure 4. Suitable flexible inserts shall be used to prevent distortion of cross sectional shape of extrusions and prevent chatter or cracking. The upper and lower extrusions shall be joined by butt welding which shall be ground smooth and exhibit soundness of good practices conforming to the requirements of MIL-W-8604.

3.3.2.1 Finish.- The formed extrusions shall be surface treated by Finish No. 7.3.2 followed by Paint Finish No. 21.3 of MIL-STD-171, Color X24087 of FED-STD-595. Finish shall be applied prior to assembly of extrusions to container shells.

3.3.2.2 Extrusion attachment.- The sealing extrusions shall be attached to the container shells with a two part silicone sealant. The sealant shall conform to Dow Corning Silastic RTV 589 with Primer 4094, Dow Corning Corporation, Midland, Michigan; or General Electric RTV-60 with appropriate primer, General Electric, Silicone Products Department, Waterford, N.Y. The primer shall be applied to the mating surfaces of shells as well as the sealing extrusions. The sealant shall be uniformly applied in the extrusion well in such a manner as to obtain maximum adhesion and seal. The extrusion shall be assembled to the shells and tool rolled around the periphery for mechanical attachment.

3.3.3 Clamps.- Twelve (12) clamps conforming to Part No. SK M-364, Skydyne Incorporated, Port Jervis, N.Y. shall be located and secured to lower sealing extrusion as shown on Figure 1. The clamp incorporates a spring detent in the base plate which engages into provided offset in sealing extrusion when the clamp is positioned into the extrusion rail. Stake the extrusion rail in two (2) places to prevent lateral movement of clamp base plate. Each clamp shall be properly adjusted and cotter pinned to assure uniform pressure on sealing gasket. Touch-up paint shall be applied to stake marks with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.3.1 Clamp finish.- Clamps shall be finished prior to assembly to container by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595.

3.3.4 Handles.- A total of four handles (2 each end) conforming to Drawing C10511987 shall be assembled and riveted to container with back-up plates conforming to B10533212 as shown on Figure 1. Rivets shall conform

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

to MS16535, .188 diameter, steel, length as required, and shall secure handle in a manner so as to provide a pressure tight attachment. Handles shall be painted by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595. Paint finish shall not be applied to Hycar rubber on handle. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.5 Sealing gasket.- Gasket shall be fabricated of rubber 7/16 O.D by 5/16 I.D. in accordance to the requirements of MIL-R-3065; Type S, Class SC, Grade No. SC415 A_1 B_1 F_2K of MIL-STD-417. The gasket shall be formed by vulcanizing or butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female sealing extrusion, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The exposed gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.3.6 Card holders.- Two (2) card holders shall be assembled to the front side of the assembled container as shown on Figure 1. The card holders shall conform to Drawing B8246019-1 and B8246019-2. The card holders shall be secured to the container by seven each rivets conforming to MS16535, .123 diameter, steel, length as required.

3.3.7 Relief valve.- A two way automatic relief valve conforming to Drawing A10539222 shall be assembled to the container as shown on Figure 1.

3.3.7.1 Decal.- A decal conforming to Drawing A10533221 shall be installed above relief valve as shown on Figure 1.

3.3.8 Humidity indicator.- A humidity indicator plug conforming to MIL-I-26860, Type II, aluminum, shall be installed on opposite end of cover from relief valve.

3.4 Interior arrangements.

3.4.1 Type I container assembly.- The interior arrangement consists of one (1) polyethylene cushion insert in the body and one (1) polyethylene cushion insert in the cover, located and bonded in position as shown on Figure 5. The cushion inserts shall be fabricated as shown on Figures 6 and 7.

3.4.2 Type II container assembly.- The interior arrangement consists of one (1) polyethylene cushion insert in the body and one (1) polyethylene cushion hold-down in the cover. Cushions shall be fabricated as shown on Figures 9 and 10. Location and bonding within the container shall be as shown on Figure 8.

3.5 Marking.- Marking legends shown on Figure 1 shall be applied by a silk screen or stencil, System No. 21.1 of MIL-STD-171; Color, White 17875 of FED-STD-595.

3.6 Performance requirements.- The reusable container fabricated to the requirements of this specification shall maintain a positive pressure

Document is available at https://assist.dla.mil. Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

of 1 psi without loss of pressure.

3.7 Environmental.

3.7.1 Storage.- The container assembly shall be capable of maintaining dimensional and structural integrity when subjected to temperature extremes of 150°F to -80°F. The container shall show no evidence of distortion, cracks or delamination and shall remain pressure tight.

3.7.2 Impact resistance (ambient temperature).- The assembled container shall show no evidence of cracking, chipping or delamination when dropped from a height of 24 inches. The container shall then be tested for being pressure tight.

3.7.3 Impact resistance (low temperature).- The container assembly shall show no evidence of cracking or fracture when subjected to low temperature conditioning at -40°F immediately followed by drop test from a height of 24 inches. The container shall then be tested for being pressure tight, after container is conditioned at ambient temperatures.

3.8 Workmanship.- Containers fabricated to the requirements of this specification shall be in accordance with proven commercial forming techniques with minimum machining or routing of shells and shall be free of defects that might affect strength, serviceability, and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article submission.- When a first article sample is required by the contract it shall be submitted to the Government for test and evaluation in accordance with the contract schedule. The sample shall consist of two container assemblies. The sample shall be manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, equipment, processes and including packaging and packing shall be the same as used for regular production and shall be obtained from the same source of supply. After provisional acceptance at source, the initial production

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

samples will be inspected and tested by the Government for all requirements and tests of the drawings and specifications. Government inspection and testing may be conducted at the contract facility or as otherwise specified by the contract. The Government reserves the right to require new initial production samples until such time as an acceptable sample is submitted.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plans specified in Table II. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL: NONE		
MAJOR: AQL 1.0% defective		
101. Improper forming	3.3.1	Visual
102. Sealing extrusion improperly formed, poor joints, welding, improperly finished	3.3.2 3.3.2.1	Visual
103. Improper sealant or attachment of extrusion	3.3.2.2	Certification, Visual
104. Card holder, improperly attached, improperly finished	3.3.6	Visual
105. Improper handle, improperly assembled or finished	3.3.4	Visual
106. Improper gasket, improperly secured	3.3.5	Visual
107. Improper clamps, assembly to container, improper finish, not cotter pinned	3.3.3, 3.3.3.1	SME & Visual
108. Improper relief valve	3.3.7	Visual
109. Incorrect decal	3.3.7.1	Visual
110. Humidity indicator	3.3.8	Visual
111. Cushions not fabricated to figures, or bonded in position properly	3.4.1 or Fig. 5 3.4.2 or Fig. 8	Visual, Tactile
112. Marking incorrectly applied	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS CONTINUED

CLASS CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
MINOR: AQL 4.0% defective		
201. Color match and finish	3.2.1, 3.2.2	Visual
202. Excess adhesive on gasket	3.3.5	Visual

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.3.4 Certification.- Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection and shall suffice for the remainder of the production quantities, provided the manufacturing processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

No.	CHARACTERISTIC	TEST DATA TO COMPLY WITH
301.	Material	3.2, 3.2.3, 3.3.2.2

4.4 Special sampling.

4.4.1 General.- Two containers shall be selected at random as a special sampling from each 100 produced, or from each month's production, whichever occurs first. The samples shall have successfully met all other acceptance test specified herein, and shall then meet the following requirements and tests:

TEST	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.1 - 3.5	Type I container assembly - SME, Visual, Figures 1, 2, 3, 4, 5, 6 and 7 Type II container assembly - SME, Visual, Figures 1, 2, 3, 4, 8, 9 and 10
302. Workmanship	3.8	Visual

4.4.2 Environmental and functional.- One sample container assembly shall be selected at random as a sample from each 100 produced, or from each month's production whichever occurs first. The sample shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

TEST	REQUIREMENT	TEST PROCEDURE
303. Pressure tight	3.6	4.6.1
304. Storage	3.7.1	4.6.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall make available inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Preparation for tests.

4.5.2.3.1 Type I container assembly.- Type I, sample container shall be fitted with simulated load of the same weight and mass as the Gun Direction Computer:M18 w/Table (see 6.3).

4.5.2.3.2 Type II container assembly.- Type II, sample container shall be fitted with simulated load of the same weight and mass as the Computer Logic Unit, Test Set AN/GSM-70 w/Test Tape Kit (see 6.3).

4.5.2.3.3 The relief valve shall be removed for all testing.

4.6 Test methods and procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

4.6.1 Pressure retention test.- All production containers shall have the relief valves removed and replaced by an appropriate plug. A suitable connection shall be made for the introduction of air pressure. A gage shall be connected to indicate pressure within the container. Air pressure shall be applied up to 1 pound per square inch and the intake valve closed to retain pressure. A soap solution shall be applied to all joints, seams and welds. There shall be no evidence of leakage. After five minutes the gage shall be observed to make sure that the original pressure has been maintained (see 3.6).

4.6.2 Fungus resistance.- Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. At the completion of the test period any growth or fungus which would impair the function of the container or any profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their sheet material has been tested by above procedure and is fungus resistant.

4.6.3 Storage.- The container assembly with simulated load shall be tested as follows:

(a) Elevated temperature.- The container assembly shall be placed in test chamber and the temperature elevated gradually to 150°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of 150°F for a period of 4 hours, after which the temperature shall be gradually reduced to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test. There shall be no leakage when the container is tested in accordance with 4.6.1.

(b) Low temperature.- The container assembly shall be placed in test chamber and the temperature lowered gradually to -80°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of -80°F for a period of 4 hours, after which the temperature shall be gradually raised to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test. There shall be no leakage when the container is tested in accordance with 4.6.1.

4.6.4 Impact resistance (ambient temperatures).- The sample container shall be supported at one end of its base on a sill or block 5 inches in height. The opposite end of the container shall be allowed to fall freely from a height of 24 inches. Following the drop test, the container assembly shall be subjected to the pressure retention test specified in 4.6.1.

4.6.5 Impact resistance (low temperature).- The sample container shall be placed in a test chamber and the temperature lowered gradually to -40°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of -40°F for a period of 4 hours. The container

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

shall be immediately subjected to drop test described in 4.6.4. The container shall be subjected to pressure retention test specified in 4.6.1, after container has been stabilized at ambient temperatures.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise specified, the container shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The reusable containers defined herein are intended for all types of shipment and storage. Type I container is intended to accommodate the Computer, Gun Direction: M18 w/Table and constitutes "Box 1 of 2" for set packaging of Computer Set, Gun Direction W/E as specified on Packaging Data Sheet 10525735. Type II container is intended to accommodate the Test Set, Computer Logic Unit, AN/GSM-70 and Kit, Test Tape Prepunched Program as specified in Packaging Data Sheet 8623273.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Type container assembly

6.3 Weight.- Weight of simulated loads are as follows:

Computer, Gun Direction: M18 w/Table - 280 lbs.
Test Set Computer Logic Unit AN/GSM-70 w/Kit Test Tape, Prepunched Program - 190 lbs.

6.4 Federal stock numbers.

Type I Container Assembly, Part No. 8246020 - FSN1220-918-1502
Type II Container Assembly, Part No. 10539215 - FSN4931-071-8158

Custodian:


Army - MU

Preparing activity:

Army - MU

Project No. 1220-A036

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

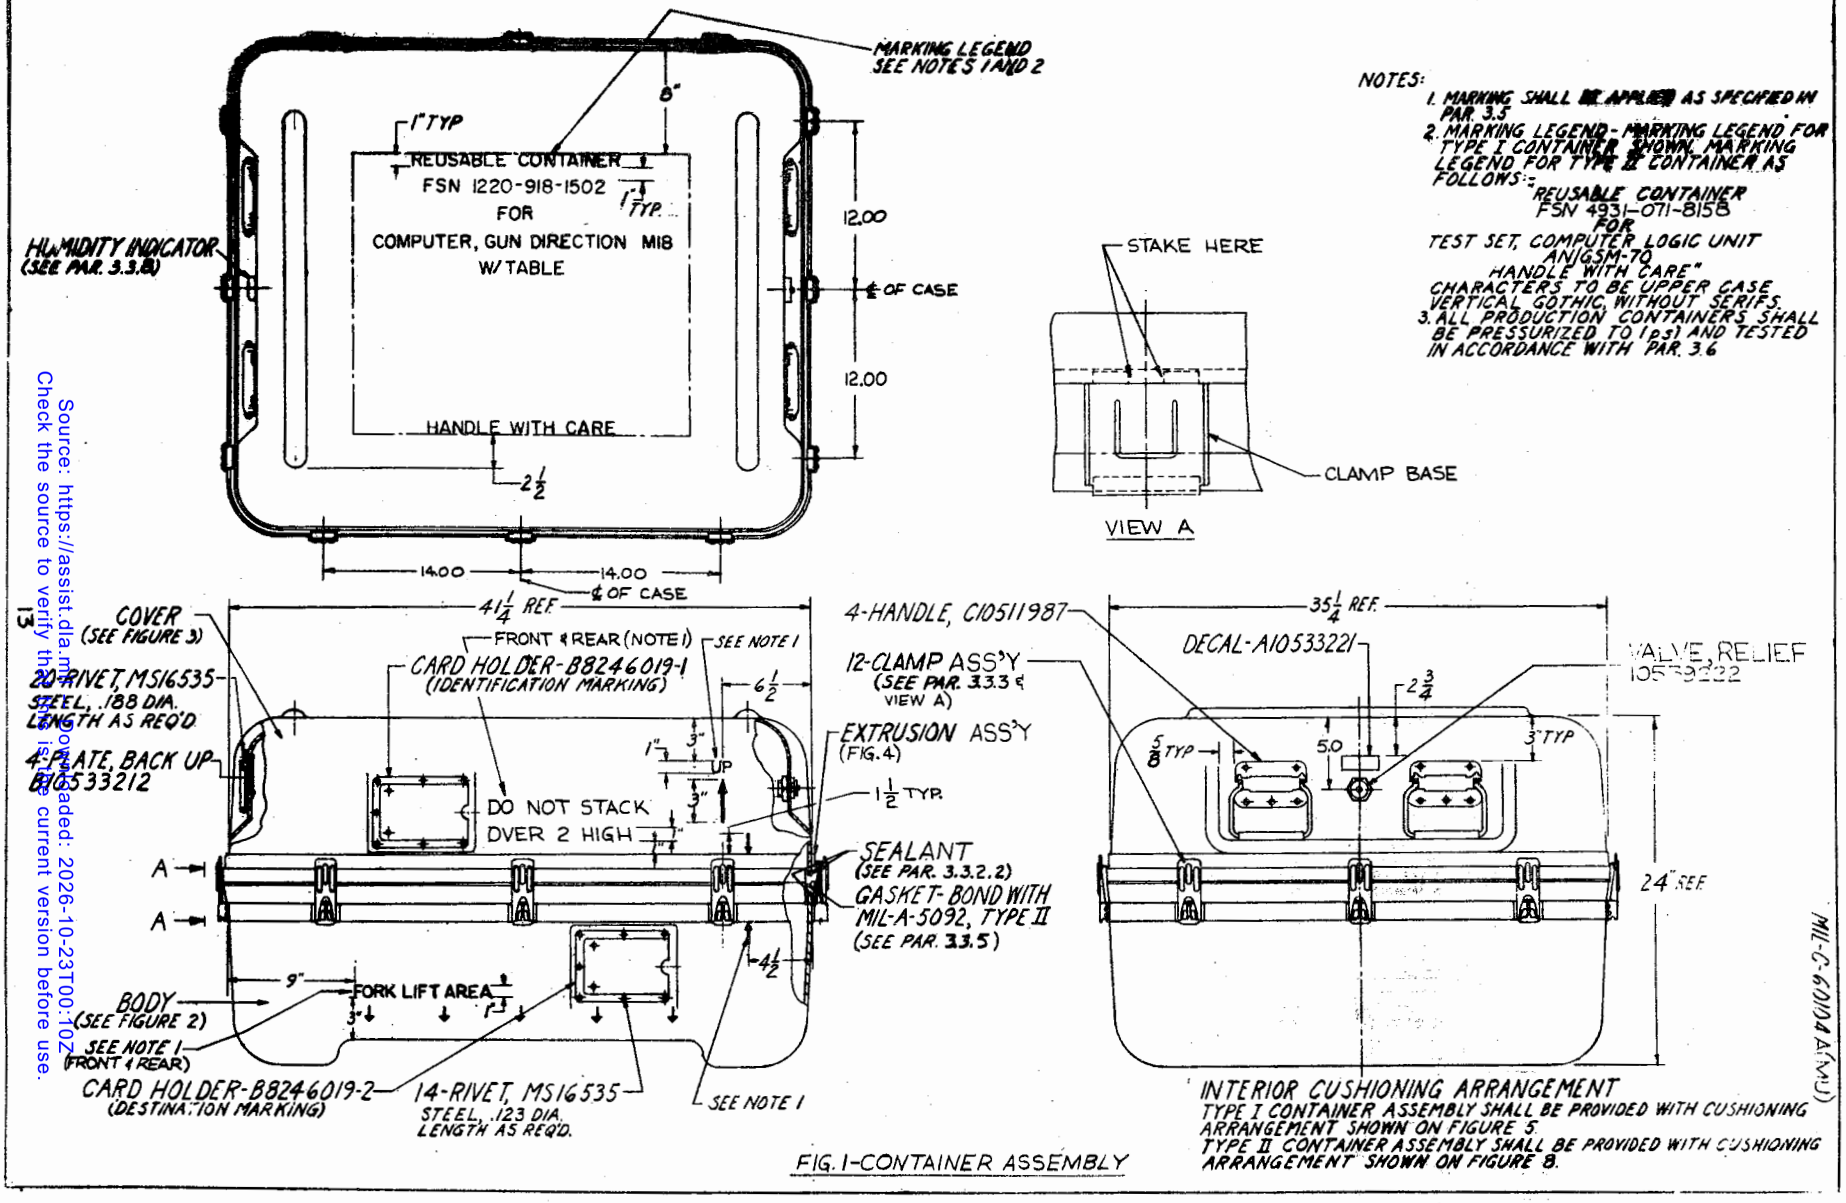

NOTES:

1. MARKING SHALL BE APPLIED AS SPECIFIED IN PAR. 3.5
2. MARKING LEGEND - MARKING LEGEND FOR TYPE I CONTAINER SHOWN. MARKING LEGEND FOR TYPE II CONTAINER AS FOLLOWS:

   REUSABLE CONTAINER
   FSN 4931-071-8158
   FOR
   TEST SET, COMPUTER LOGIC UNIT
   AN/GSM-70
   "HANDLE WITH CARE"

   CHARACTERS TO BE UPPER CASE VERTICAL GOTHIC, WITHOUT SERIFS.
3. ALL PRODUCTION CONTAINERS SHALL BE PRESSURIZED TO 1 psi AND TESTED IN ACCORDANCE WITH PAR. 3.6

FIG. 1-CONTAINER ASSEMBLY

INTERIOR CUSHIONING ARRANGEMENT

TYPE I CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIGURE 5.
TYPE II CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIGURE 8.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

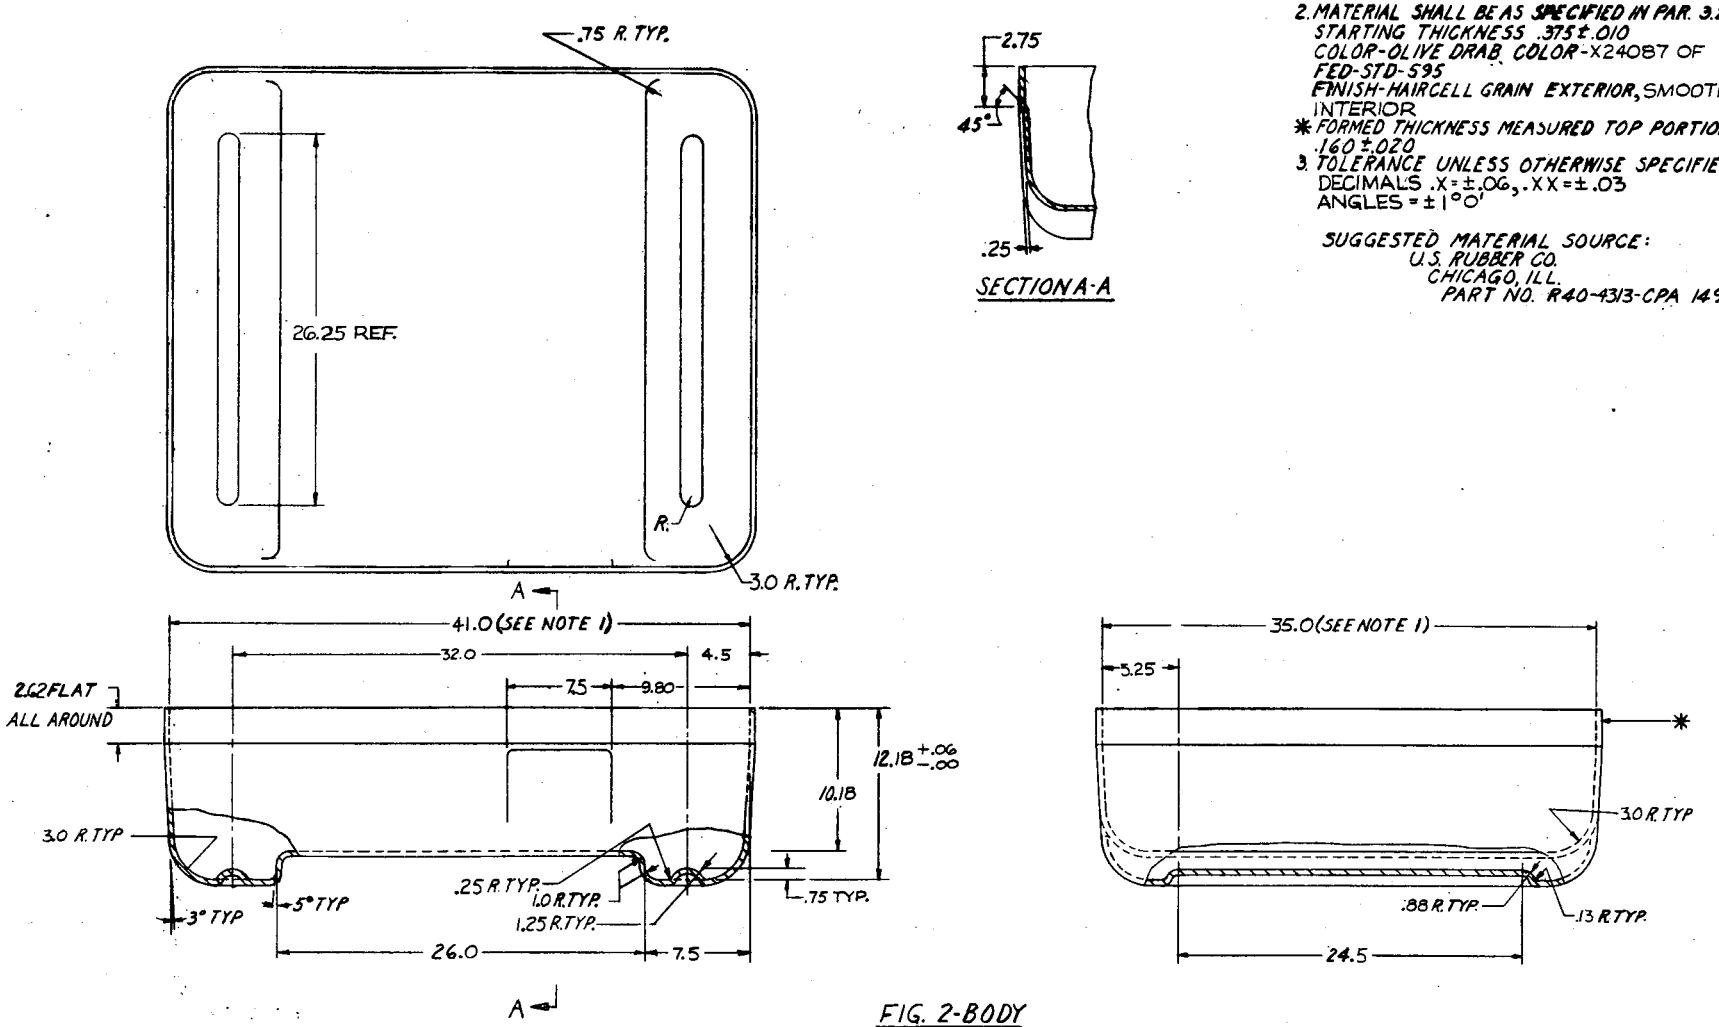


FIG. 2-BODY

NOTES:


1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2
   STARTING THICKNESS .375 ± .010
   COLOR-OLIVE DRAB, COLOR-X24087 OF FED-STD-595
   FINISH-HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR
   * FORMED THICKNESS MEASURED TOP PORTION .160 ± .020
3. TOLERANCE UNLESS OTHERWISE SPECIFIED
   DECIMALS .X = ± .06, .XX = ± .03
   ANGLES = ± 1° 0'


SUGGESTED MATERIAL SOURCE:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2
STARTING THICKNESS .375±.010
COLOR-OLIVE DRAB COLOR-X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR
* FORMED THICKNESS MEASURED TOP PORTION .160±.020
3. TOLERANCE UNLESS OTHERWISE SPECIFIED:
DECIMALS .X=±.06, .XX=±.03
ANGLES ±1°0'

SUGGESTED MATERIAL SOURCE:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

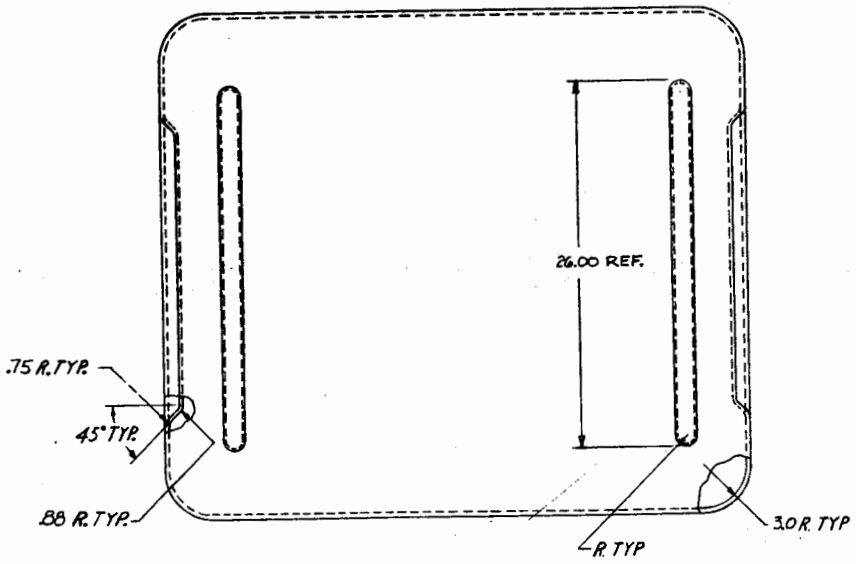

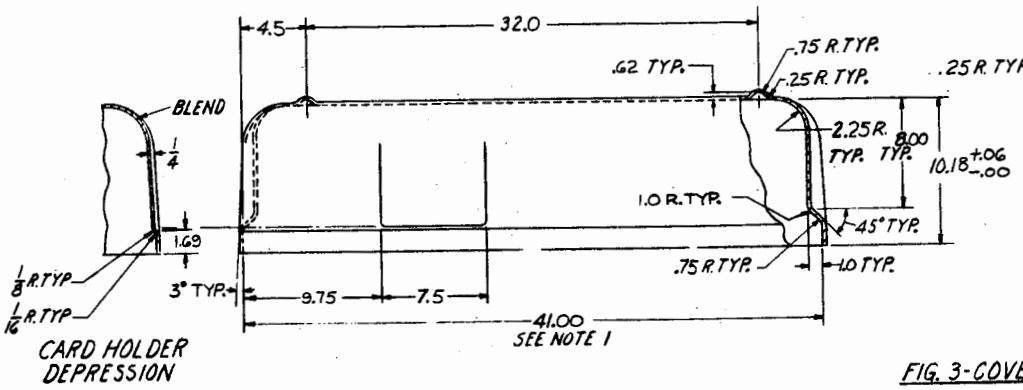

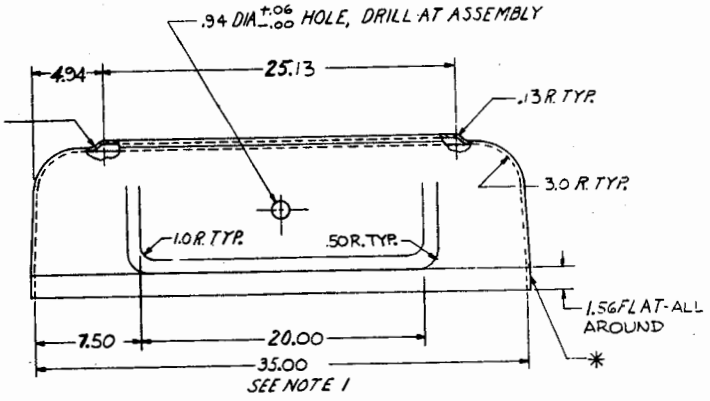


FIG. 3-COVER

MIL-C-601?-1A(NAVY)

15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.


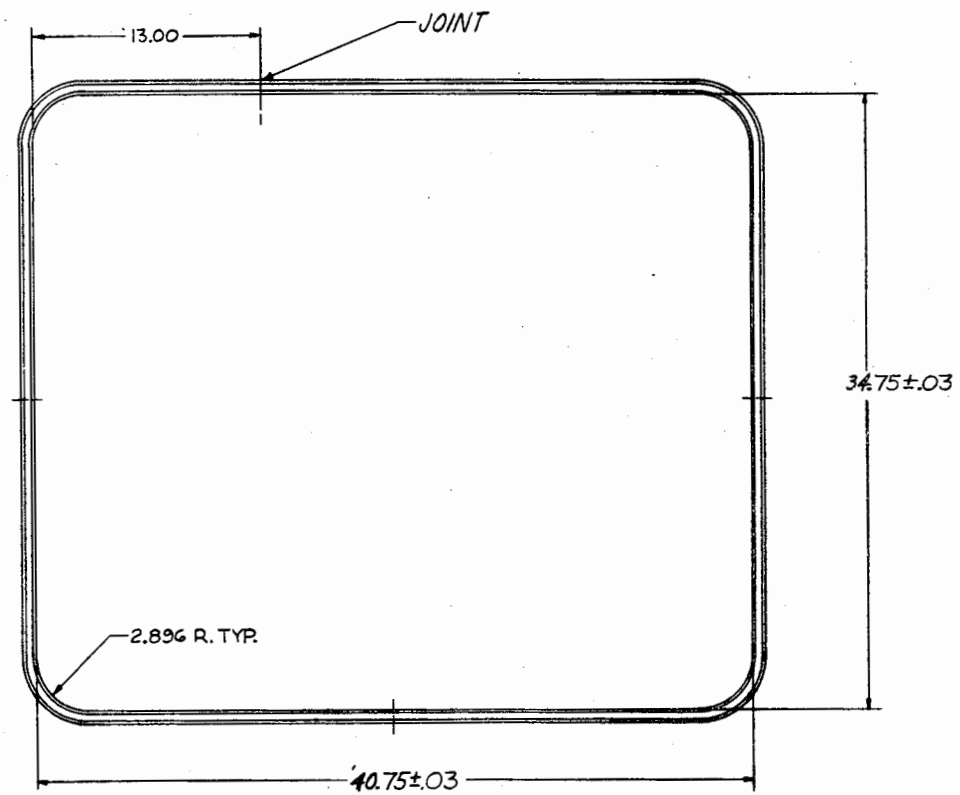



FIG. 4-EXTRUSION ASSEMBLIES

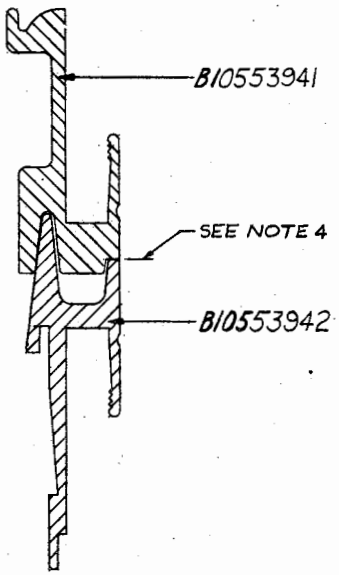


"TYPICAL SECTION"

NOTES:
1. COMPLETED EXTRUSIONS SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN "TYPICAL SECTION."
2. MUST MATCH SHELLS FIGURE 2 AND FIGURE 3.
3. EXTRUSIONS SHALL BE FORMED, WELDED, AND FINISHED IN ACCORDANCE WITH PARA. 3.3.2 AND 3.3.2.1
4. SURFACE SHOWN SHALL BE FLAT WITHIN .020 INCH T.I.R. IN ANY 6 INCHES OF LENGTH AND .030 INCH T.I.R. OVER ENTIRE LENGTH OF ANY SIDE OR END.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

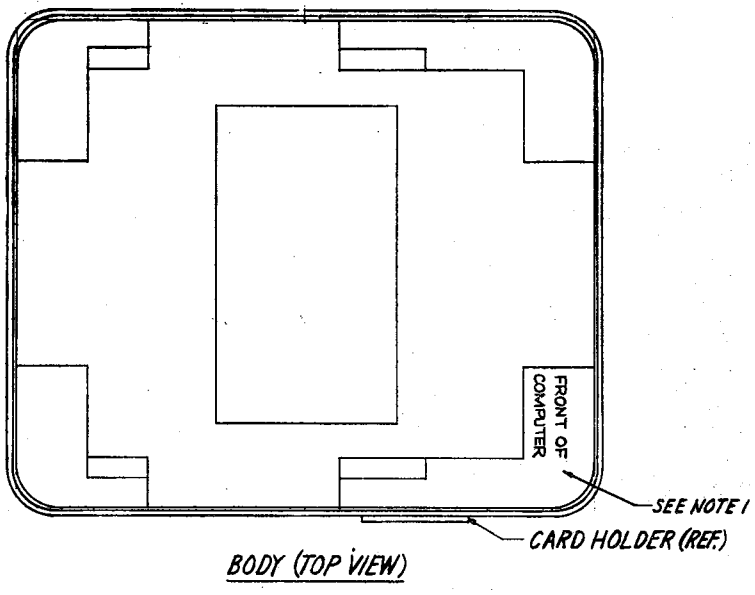

BODY (TOP VIEW)

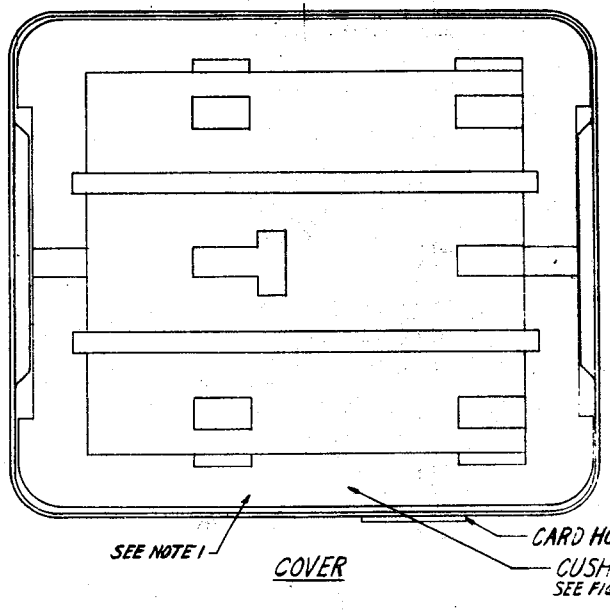

COVER

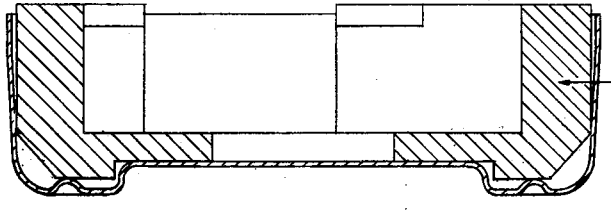

BODY (SIDE VIEW)

NOTE:
1. BOND IN PLACE WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.

FIG. 5 CUSHION ARRANGEMENT
(FOR TYPE I CONTAINER ASSEMBLY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; DENSITY-2 LBS/CU.FT.; COLOR-CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. SILK SCREEN OR STENCIL, SYSTEM NO. 21.1 OF MIL-STD-171, COLOR-WHITE-17875 OF FED-STD-595.
4. TOLERANCES EXCEPT AS NOTED:
   FRACTIONS ±1/16
   ANGLES ±1°0'



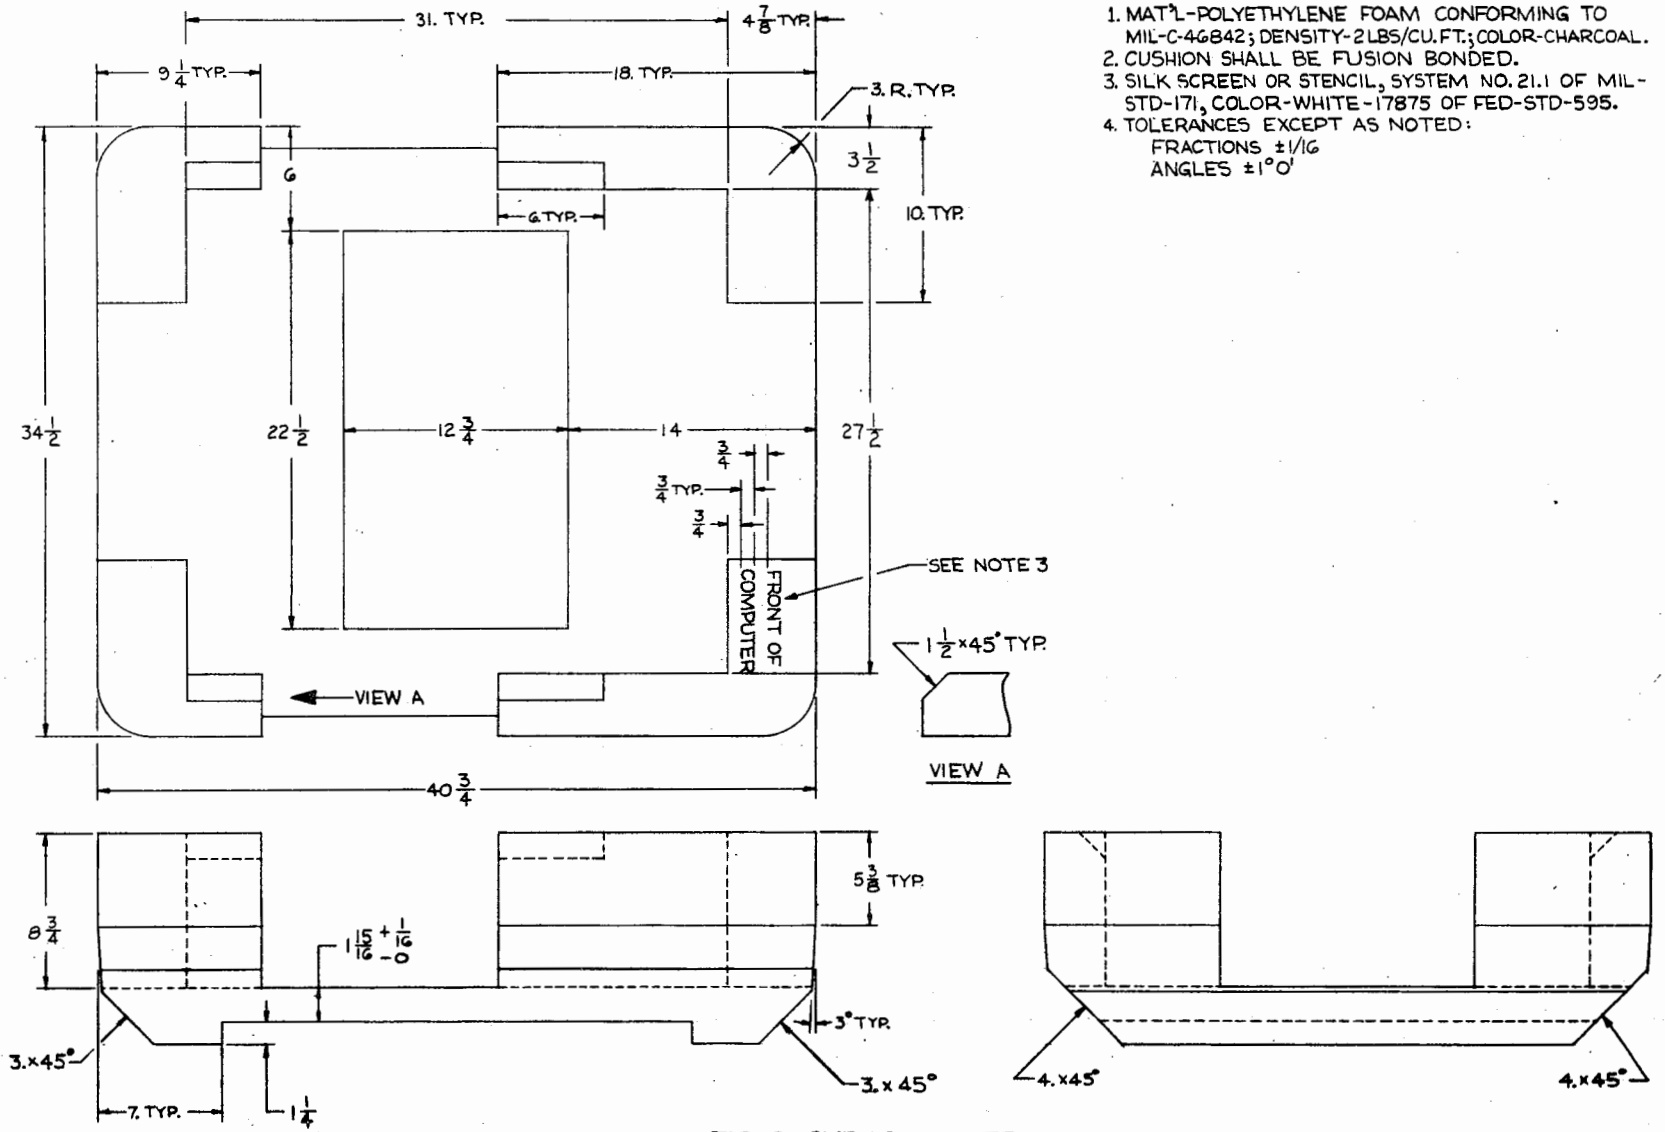


FIG. 6 CUSHION, LOWER


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; DENSITY-2 LBS/CU. FT.; COLOR-CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. TOLERANCES: EXCEPT AS NOTED,
   FRACTIONS ± 1/16
   ANGLES ±1°0'

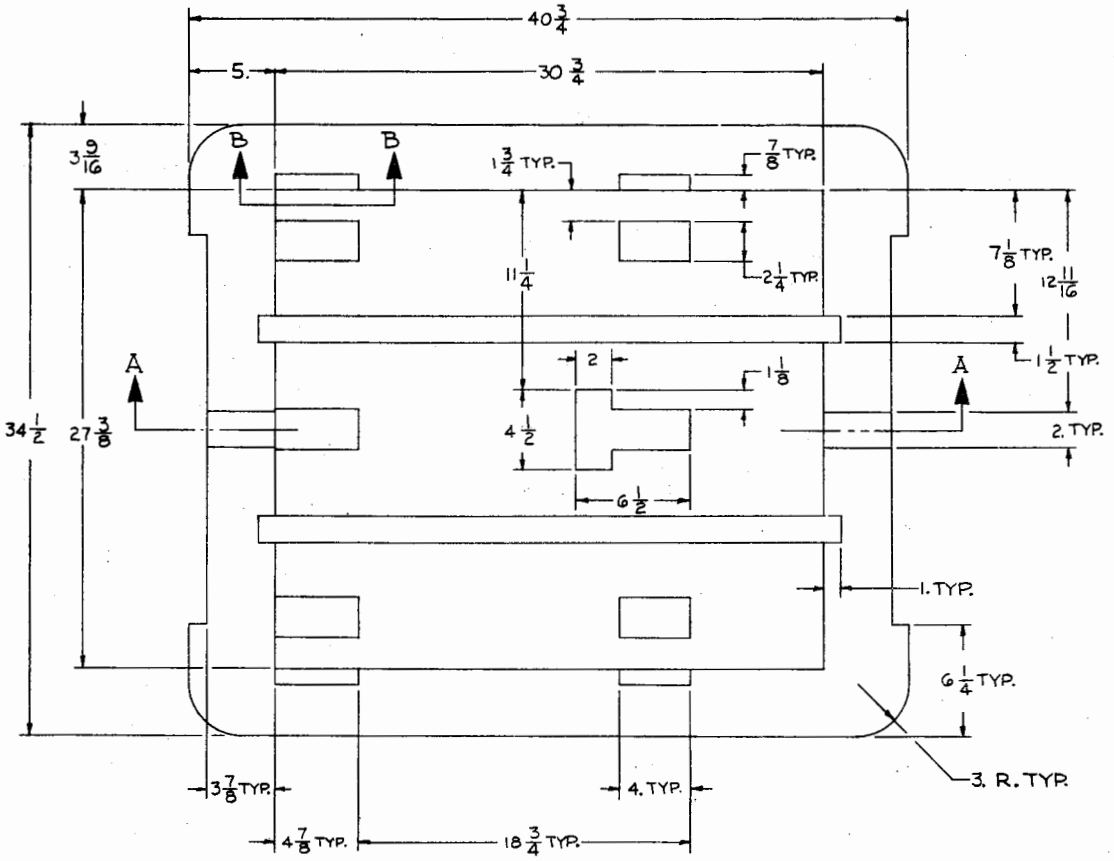

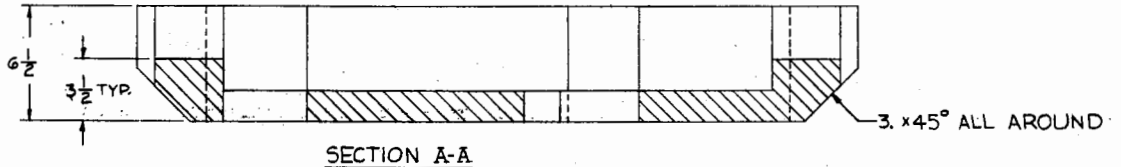


SECTION A-A



SECTION B-B

FIG. 7 CUSHION, UPPER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

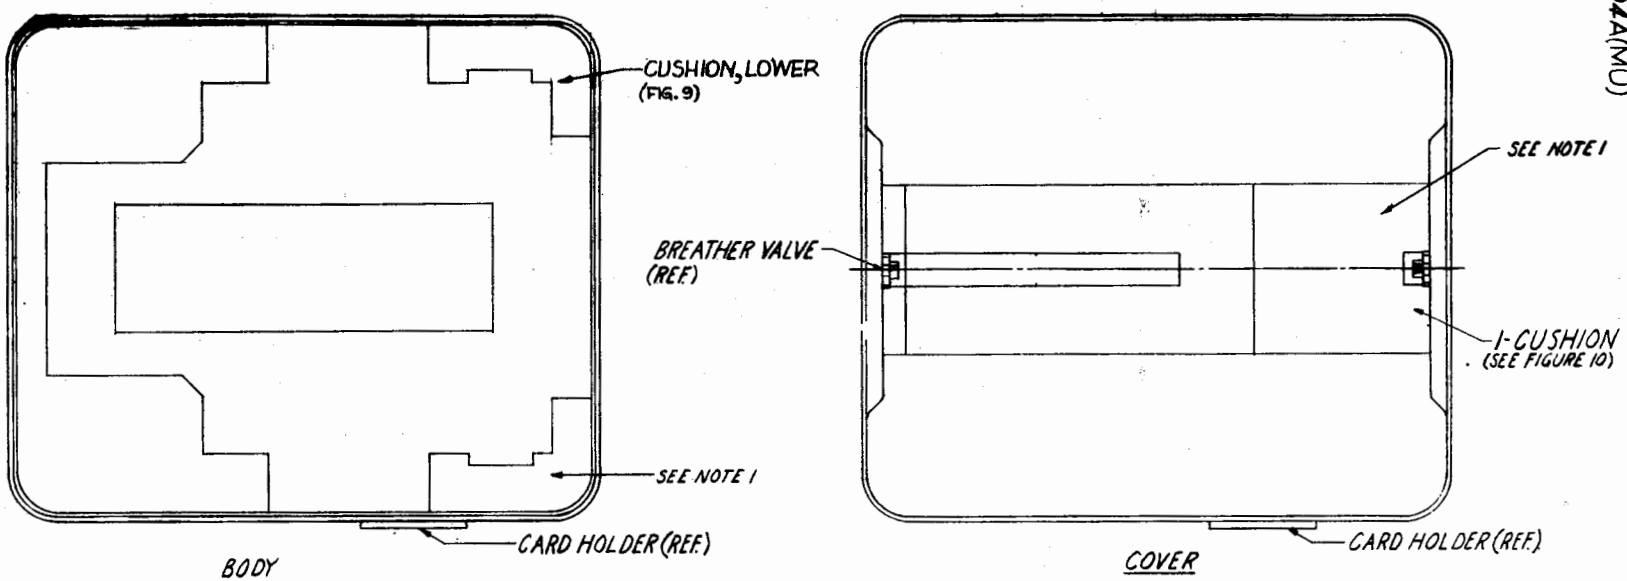

NOTE:
1. BOND IN PLACE WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.

FIG. 8 CUSHION ARRANGEMENT
(FOR TYPE II CONTAINER ASSEMBLY)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; DENSITY-2 LBS/CU.FT.; COLOR-CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. TOLERANCES-FRACTIONS ±1/16, ANGLES ±1°0'

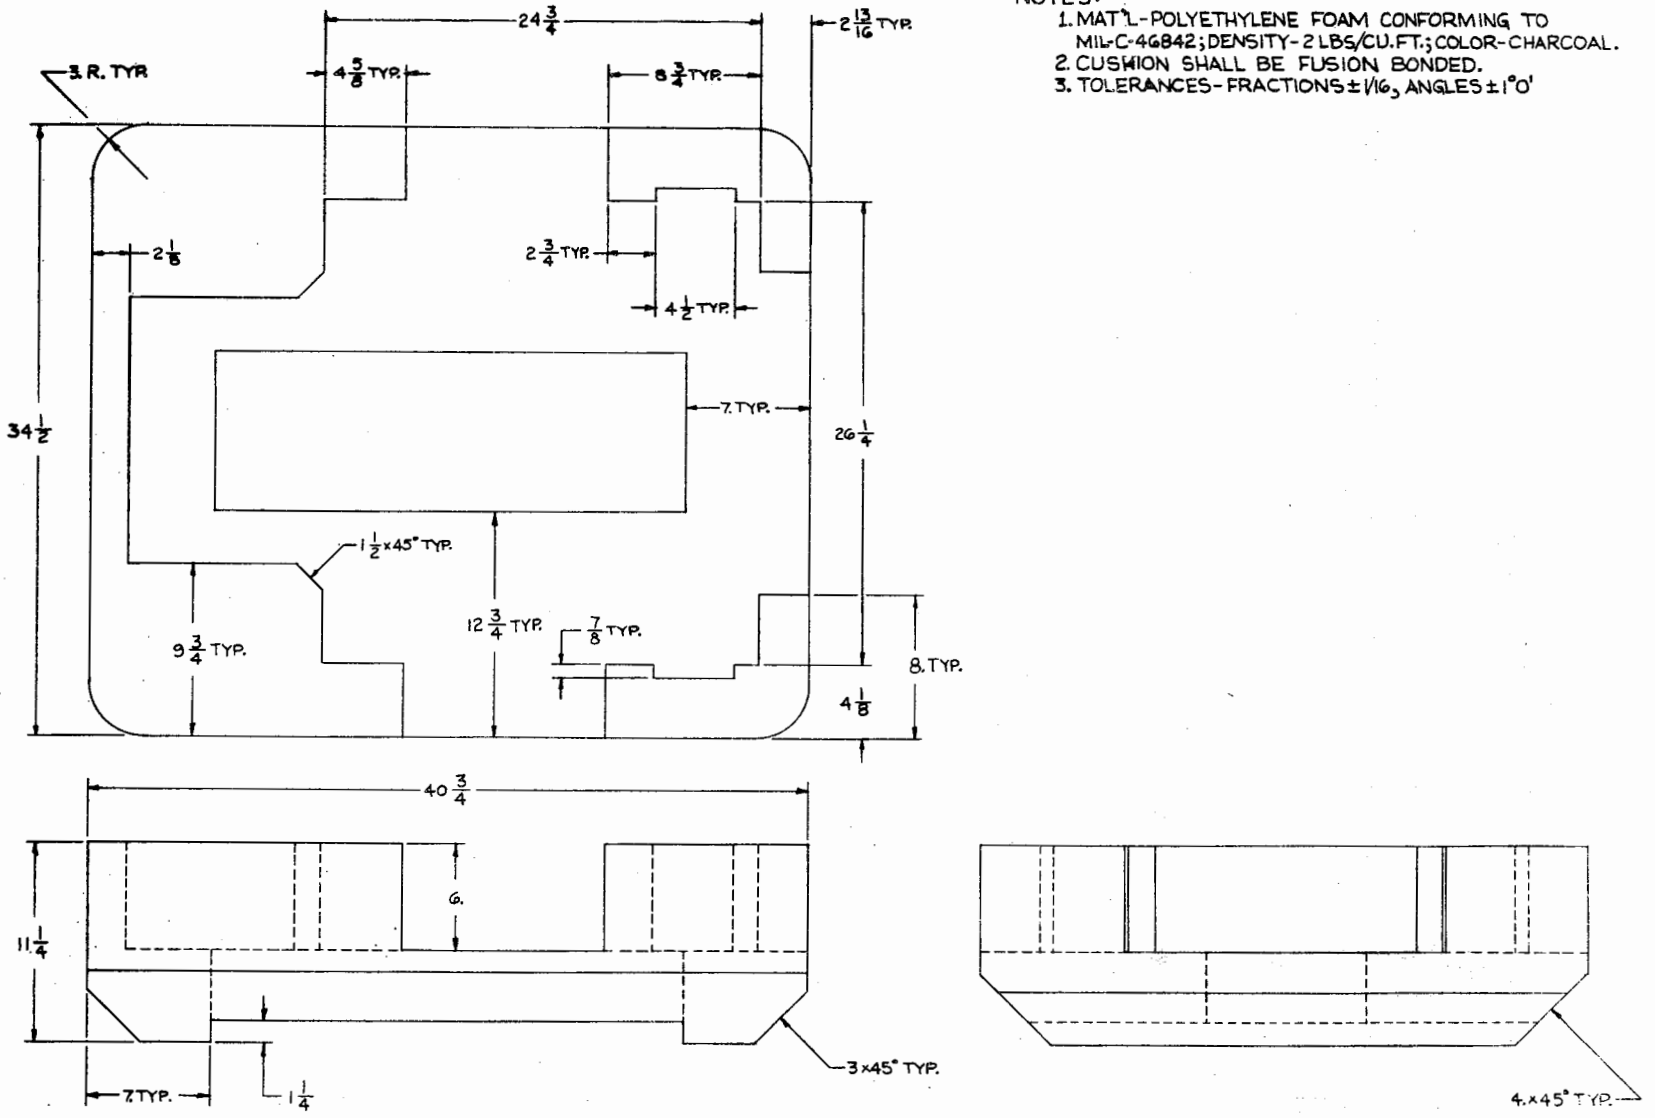


FIG. 9 CUSHION, LOWER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:10Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; DENSITY-2 LBS/CU. FT.; COLOR-CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. TOLERANCES-FRACTIONS ±1/16

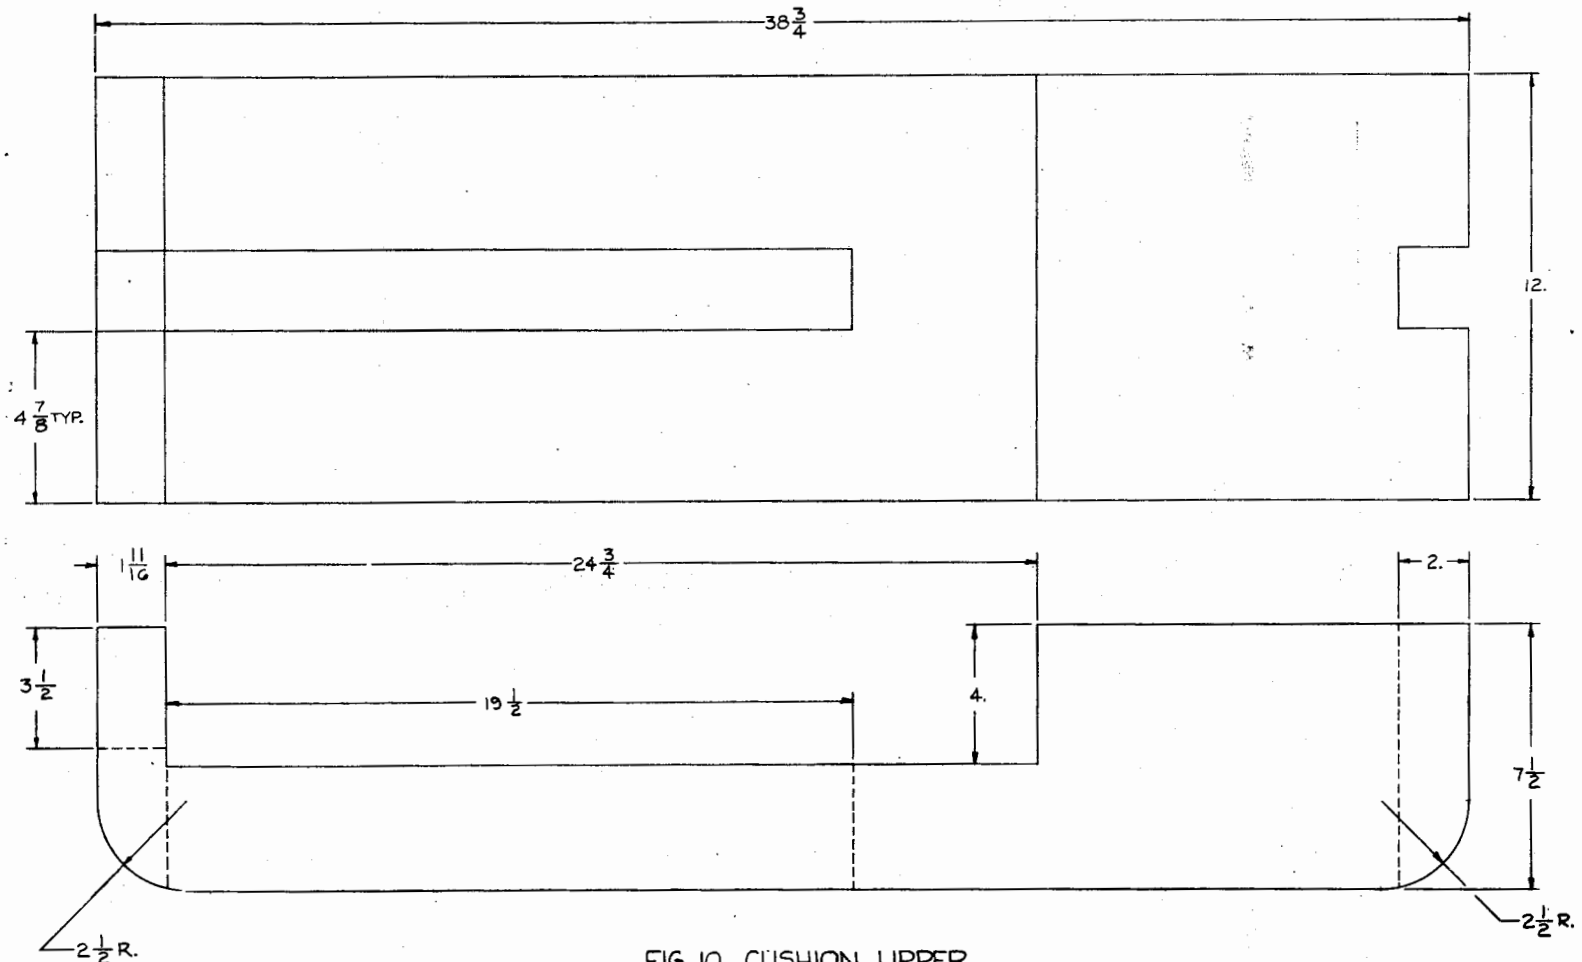


FIG. 10 CUSHION, UPPER

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T00:10Z
Check the source to verify that this is the current version before use.