MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (NARROW FLANGE MOUNT, BAYONET COUPLING, CRIMP PIN CONTACT), (SERIES I, CLASSES A, G, AND R)

Ⓑ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓑ The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

Ⓑ INACTIVE. SUPERSEDED BY MS3470 OF MIL-C-26482.

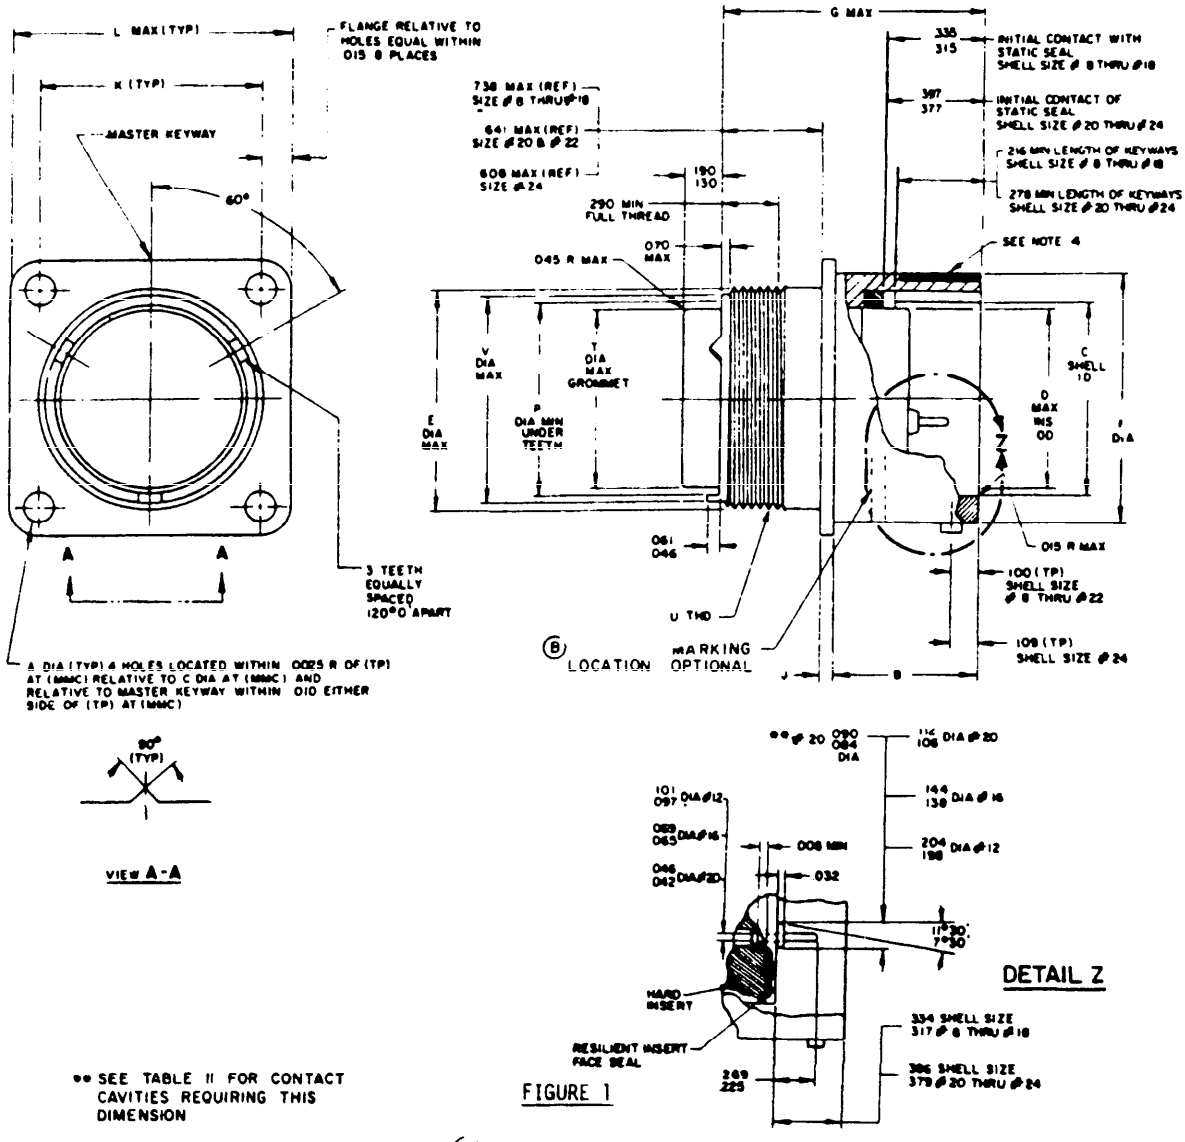

** SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.


TABLE I
CONNECTOR DIMENSIONS

SIZE	A	B	C	D	E	F	G	J	K	L	M	N	P	T
8	.120	.462 .431	.367 .361	.285	.499	.474 .468	1.215	.078 .046	.594	.828	.417 .406	.563 .547	.370	.305
10	.120	.462 .431	.495 .489	.402	.625	.591 .585	1.215	.078 .046	.719	.954	.545 .534	.680 .664	.497	.405
12	.120	.462 .431	.612 .606	.516	.750	.751 .745	1.215	.078 .046	.812	1.047	.694 .683	.859 .843	.613	.531
14	.120	.462 .431	.737 .731	.641	.875	.876 .870	1.215	.078 .046	.906	1.141	.819 .808	.984 .968	.738	.665
16	.120	.462 .431	.862 .856	.766	1.000	1.001 .995	1.215	.078 .046	.969	1.234	.944 .933	1.108 1.092	.863	.790
18	.120	.462 .431	.967 .961	.855	1.062	1.126 1.120	1.215	.078 .046	1.062	1.328	1.044 1.033	1.233 1.217	.919	.869
20	.120	.587 .556	1.092 1.086	.980	1.187	1.251 1.245	1.275	.110 .078	1.156	1.453	1.169 1.158	1.358 1.342	1.044	.994
22	.120	.587 .556	1.217 1.211	1.105	1.312	1.376 1.370	1.275	.110 .078	1.250	1.578	1.294 1.283	1.483 1.467	1.169	1.119
24	.147	.620 .589	1.342 1.336	1.229	1.437	1.501 1.495	1.275	.110 .078	1.375	1.703	1.419 1.408	1.610 1.594	1.294	1.244

SIZE	U THREAD	V	W	W'	W''	W'''	W''''	X	X'	X''	X'''
8	1/2-20 UNF-2A	.437	1.492	1.842	2.115	4.769	2.119	1.061	1.411	1.684	4.370
10	5/8-24 UNEF-2A	.572	1.492	1.842	2.115	4.769	2.219	1.061	1.411	1.684	4.370
12	3/4-20 UNEF-2A	.687	1.492	1.842	2.250	4.769	2.349	1.061	1.411	1.819	4.370
14	7/8-20 UNEF-2A	.812	1.492	2.077	2.340	4.769	2.349	1.061	1.646	1.909	4.370
16	1-20 UNEF-2A	.937	1.492	2.077	2.475	4.769	2.579	1.061	1.646	2.044	4.370
18	1 1/16-18 UNEF-2A	.992	1.492	2.077	2.574	4.769	2.579	1.061	1.646	2.143	4.370
20	1 3/16-18 UNEF-2A	1.117	1.552	2.137	2.767	4.829	2.869	.996	1.581	2.211	4.305
22	1 5/16-18 UNEF-2A	1.242	1.552	2.137	2.890	4.829	2.869	.996	1.581	2.334	4.305
24	1 7/16-18 UNEF-2A	1.367	1.552	2.137	3.012	4.829	3.109	.963	1.548	2.423	4.272

SIZE	X''''	Y	Y'
8	1.720	.830	3.250
10	1.820	.880	3.250
12	1.950	.950	3.250
14	1.950	1.010	3.250
16	2.180	1.070	3.250
18	2.180	1.130	3.250
20	2.345	1.190	3.250
22	2.345	1.260	3.250
24	2.552	1.320	3.250

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T09:16Z
Check the source to verify that this is the currentversion before use.

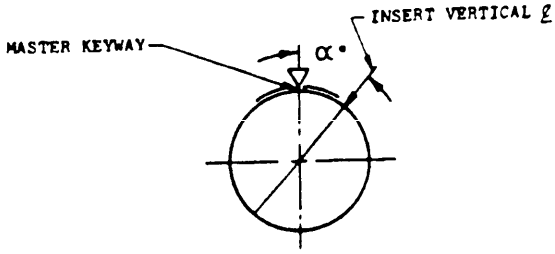

PIN INSERT
FACE VIEW

(AS VIEWED FROM ENGAGING END)

INSERT POSITION

▽ INDICATES ℄ OF SHELL

FIGURE 2



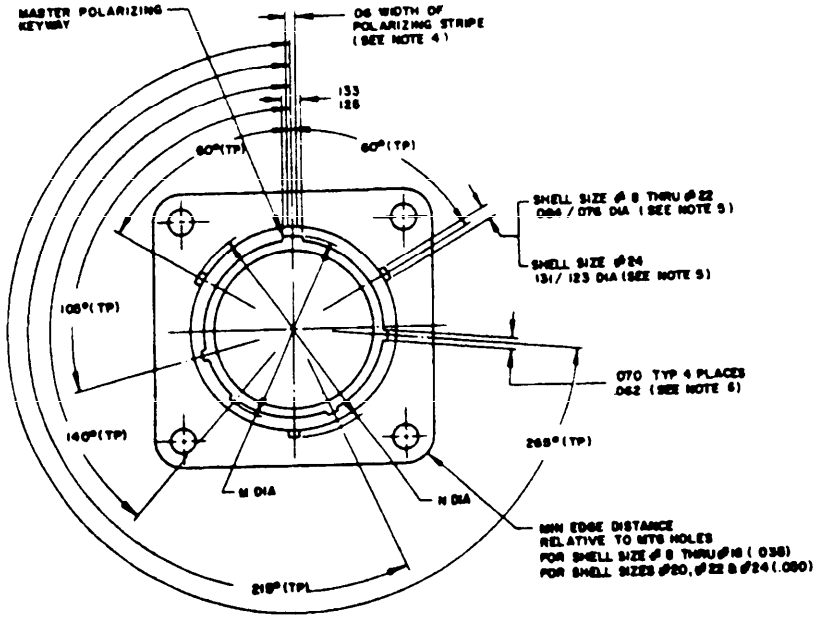


FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.




WITH STRAIGHT BACKSHELL
LESS STRAIN RELIEF

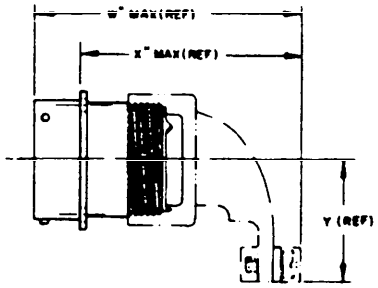


ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF

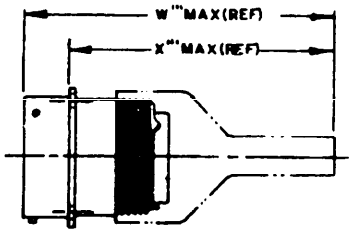


ASSEMBLED TO BACKSHELL
WITH STRAIGHT SHRINK STRAIN
RELIEF

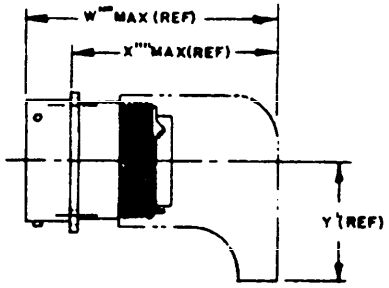

ASSEMBLED TO BACKSHELL WITH
90° SHRINK STRAIN RELIEF



ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF

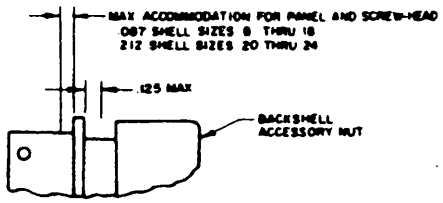

MAX PANEL THICKNESS (TYP)

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T09:16Z
Check the source to verify that this is the currentversion before use.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.

Shell	Insert arrangements	Contact cavities
8	33 and 98	A, B, and C
12	10	C and G
14	12	A,B,C,D,E,F,G, and H
14	18	A,C,E,G,J, and L
14	19	B,D,F,H,K, and M
16	26	A,B,C,D,E,F,G,H,J, K,L,M,N,P, and R
18	32	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S, and T
22	41	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S,T,U, V,W,X, and Y

NOTES:

1. FOR ALTERNATE POLARIZING POSITIONS, THE CONNECTOR INSERT IS ROTATED IN RESPECT TO THE SHELL.
2. IN "NORMAL POSITION" (POSITION "N") THE INSERT VERTICAL CENTER LINE COINCIDES WITH THE CENTER LINE OF THE MASTER KEYWAY OF THE SHELL.
3. IN "ALTERNATE POSITIONS" (POSITIONS "W", "X", "Y", AND "Z") THE PIN INSERT IS ROTATED α DEGREES CLOCKWISE RELATIVE TO $\mathcal{E}$ OF THE MASTER KEYWAY OF SHELL.
4. POLARIZING STRIPE SHALL BE COLOR CODED **BLUE**.
5. THREE (3) PROJECTIONS LOCATED WITHIN .005 R (TP) AT (MMC) RELATIVE TO "F" DIA (MMC) AND SHELL FRONT, AND WITHIN .010 EITHER SIDE OF (TP) AT (MMC) RELATIVE TO MASTER POLARIZING KEYWAY.
6. FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITHIN .0035 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL I.D. (MMC).
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR, X°±1°-0' AND X°X'±30'.

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:16Z
Check the source to verify that this is the current version before use.

TABLE III WIRE DATA

CONTACT SIZE	WIRE SIZE AWG	INSULATION O D IN INCHES / WIRE SPECIFICATION 3/			
		MIL-W-22759/4	MIL-W-16878/4	MIL-W-81381/-	
				LIGHT WT -/1	MEDIUM WT -/3
20	24	--	.040/.048 1/	.037/.043	.047/.054
	22	.071/.077	.046/.054	.043/.050	.053/.060
	20	.079/.085 2/	.054/.062	.051/.058	.061/.068
16	20	.079/.085	.054/.062 1/	.051/.058	.061/.068
	18	.092/.098	.064/.074	.060/.067	.071/.079
	16	.099/.107 2/	.073/.087	.066/.074	.079/.087
12	14	.112/.120 1/	.087/.101	.080/.089	.091/.099
	12	.129/.137 2/	.106/.120	.098/.108	.107/.117

1/ WIRE TO BE USED FOR CONNECTOR QUALIFICATION.

2/ WIRE TO BE USED FOR CONTACT QUALIFICATION.

3/ LISTED WIRE SPECIFICATIONS ARE NOT ALL INCLUSIVE. WIRE WITH SMOOTH EXTERIOR SURFACE, WHICH FALLS WITHIN THE SPECIFIED RANGE AND MEETS THE DESIGNERS CRITERIA, MAY BE USED IN APPLICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/13(USAF).

Ⓑ For insert arrangements see MIL-STD-1669.

Rear hardware must be used per MIL-C-83723/15, /16(USAF), or Air Force Drawing 7045704.


Connector assembly must include a backshell to meet the moisture sealing requirements.

Ⓑ Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion resistant steel per QQ-S-763.

Wire: See table III.

Ⓑ Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3470L----, M83723/02R----.

Part number example:

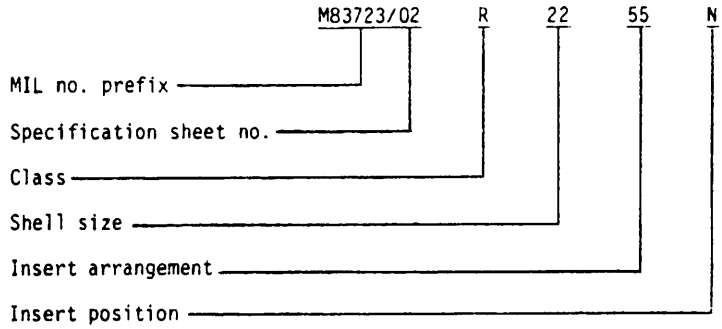

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 70, 71, 80, 82, 84
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F964-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.