MILITARY SPECIFICATION

CABINET, ELECTRICAL EQUIPMENT CY-7887/UPQ-5

This amendment forms a part of Military Specification MIL-C-85441(AS) dated 22 December 1980 and is approved for use by Naval Air Systems command Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title Line 2:	Delete "CY-7887/UPQ-5" and substitute "CY-7887A/UPQ-5."
1.2, Line 9:	Delete entirely "-- Disc Storage Shelf Assembly 3.5.3."

PAGE 5

2.1, Applicable Documents, Drawings, Line 5:	Delete entirely "335-804 Mounting Kit, Rack, Specification Control Drawing For."
2.1 Following 610600:	Add the following entries.

"612641	Video Scan Converter CV-3874/UPQ-5, Engineering Drawing Package For (Dwg 612641, subordinate drawings, and associated lists)
612642	Video Cassette Recorder RO-558/UPQ-5, Engineering Drawing Package For (Dwg 612642, subordinate drawings, and associated lists)"

FSC 4920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

3.3.7.3,(6): Delete entirely and substitute the following.

"Video Cassette Recorder (Not Supplied) Mounting - The RO-558/UPQ-5 Video Cassette Recorder, a standard 19-inch rack-mounted unit, shall be slide mounted and secured by front-panel fasteners. (Mounting hardware, including the cabinet portion of the slides, shall be included with the equipment cabinet. The chassis portion of the slides are part of the unit.)"

3.3.7.3,(7): Delete entire section.

3.3.7.3,(8): Delete "(8)" and substitute "(7)".

3.3.7.3,(9): Delete entirely and substitute the following.

"(8) Video Scan Converter (Not Supplied) Mounting - The CV-3874/UPQ-5 Video Scan Converter, a standard 19-inch rack-mounted unit, shall be slide mounted on tiltable slides which allow the unit to be rotated 90 degrees upward or downward when the drawer is extended. The unit shall be secured in the cabinet by front-panel fasteners. (Mounting hardware, including the cabinet portion of the slides, shall be included with the equipment cabinet. The chassis portion of the slides is included as part of the unit.)"

3.3.7.3,(10): Delete "(10)" and substitute "(9)".

3.3.7.3,(11): Delete entirely and substitute the following.

"(10) Duplicator Interface Unit (Not Supplied) Mounting - The Duplicator Interface unit, a standard 19-inch rack-mounted unit with a nominal 1-3/4 inch panel height, shall be secured by front-panel fasteners."

3.3.7.3,(12): Delete "(12)" and substitute "(11)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGES 14 & 15

3.4.1.1: Delete entirely and substitute the following.

"Signal Distribution - The equipment shall provide signal distribution for the composite video signal output from the IP-1101/UPQ-5 Radar Indicator in the AN/UPQ-5 Mission Recorder Display Set. The characteristics of that composite video are as described in MIL-D-81688. The composite video input to the equipment shall be by means of Cable W20 of the AN/UPQ-5. Suitable interface connection shall be provided as part of the equipment described herein. Signal routing cables shall be provided to distribute the composite video through a Video Scan Converter CV-3874/UPQ-5 either a Video Cassette Recorder RO-558/UPQ-5 or a Video Indicator IP-1314/UPQ-5. The Video Scan Converter, Video Cassette Recorder, and Video Indicator are not part of the equipment covered by this specification but are housed therein. Signal routing provisions shall also provide the capability to by-pass either or both the Video Scan Converter and the Video Cassette Recorder. The below listed signal/interconnect cables shall be provided as part of the equipment for functions as indicated.

CABLE	FUNCTION
W1	Video from Power Panel to Video Scan Converter
W2	Video from Video Scan Converter to Video Cassette Recorder
W3	Video from Video Cassette Recorder to Video Scan Converter
W9	Video from Video Scan Converter to Video Indicator

Full configuration signal distribution requirements are illustrated in Figure 1. Full configuration is with both the Video Scan Converter and Video Cassette Recorder installed. Alternate configurations are to by-pass either, or both, of these units using adapters CP1 and CP2."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 16

FIGURE 1: Delete Figure 1 and replace with modified Figure 1 contained herein.

PAGE 17

3.5.1.1,(2): Delete entirely and substitute the following.

"(2) Video Scan Converter CV-3874/UPQ-5
(Available item of supply; not part of the equipment supplied hereunder.)"

3.5.1.1,(3): Delete entirely and substitute the following.

"(3) Video Cassette Recorder RO-558/UPQ-5
(Available item of supply; not part of the equipment delivered hereunder.)"

3.5.1.1,(5): Delete entire section.

3.5.1.1,(6): Delete "(6)" and substitute "(5)".

3.5.1.1,(7): Delete "(7)" and substitute "(6)".

PAGE 18

3.5.1.1,(8): Delete "(8)" and substitute "(7)".

3.5.1.1,(9): Delete "(9)" and substitute "(8)".

3.5.1.1,(10): Delete "(10)" and substitute "(9)".

3.5.1.6,(1): Delete entire section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

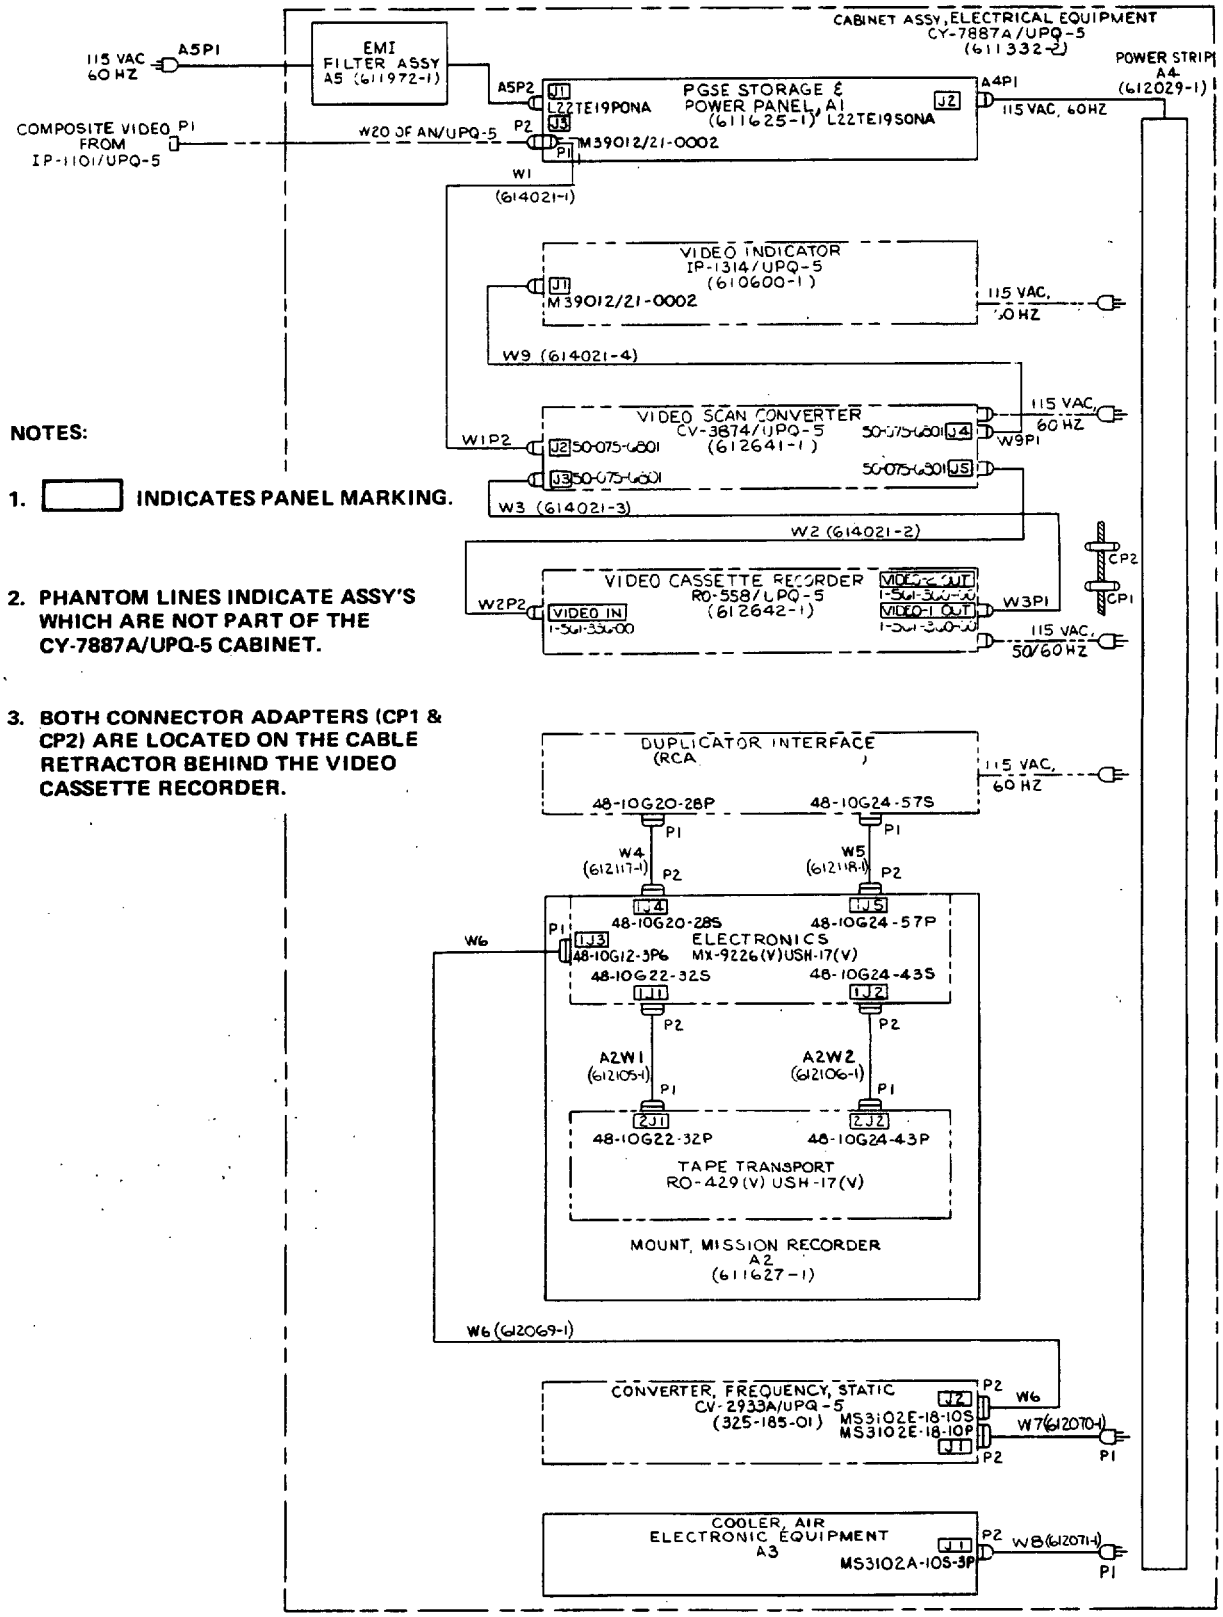


FIG. 1 CABLING DIAGRAM FOR FULL CONFIGURATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

3.5.1.6,(2): Delete "(2)" and substitute "(1)".

3.5.1.6,(3): Delete entirely and substitute the following.

"(2) CV-3874/UPQ-5 Video Scan Converter Mounting - Facilities shall be provided to slide mount a CV-3874/UPQ-5 Video Scan Converter on tiltable slides which allow the unit to be fully extended from the cabinet and rotated 90 degrees upward and downward for maintenance activities. A means shall be provided to lock the slides in the extended position. The CV-3874/UPQ-5 is a rack-mounted unit measuring 8-3/4 inches high, 19 inches wide, and 22 inches deep, excluding handles and control knobs. The CV-3874/UPQ-5 is defined in the Engineering Drawing Package, Dwg 612641 (FSCM 99592), along with subordinate drawings and associated lists. The cabinet portion of the slides shall be included with the equipment cabinet. The chassis half of the slides will be supplied as part of the Video Scan Converter unit. Cable retractors shall be provided to allow cables connected to the rear of the CV-3874/UPQ-5 to be safely and automatically withdrawn as the drawer is closed."

3.5.1.6,(4): Delete entirely and substitute the following.

"(3) RO-558/UPQ-5 Video Cassette Recorder Mounting - Facilities shall be provided to slide mount an RO-558/UPQ-5 Video Cassette Recorder. The Video Cassette Recorder is a rack-mounted unit measuring 8-3/4 inches high, 19 inches wide, and 19-3/4 inches deep, excluding handles and control knobs. The Video Cassette Recorder is defined in the Engineering Drawing Package, Dwg 612642 (FSCM 99592), along with subordinate drawings and associated lists.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 19 (CONT'D)

3.5.1.6,(4): (CONT'D)

The slides shall allow the RO-588/UPQ-5 to be fully extended from the cabinet for maintenance activities and shall incorporate a means to lock the slides in the extended position. Only the cabinet-mounted portion of the slide mechanism shall be part of the cabinet sub-assembly. The chassis-mounted portion will be part of the Video Cassette Recorder unit. Cable retractors shall be provided to allow cables connected to the rear of the RO-558/UPQ-5 to be safely and automatically withdrawn as the drawer is closed.

(4) Duplicator Interface Mounting - Mounting hardware will be provided to front mount a Duplicator Interface unit. The Duplicator Interface unit. The Duplicator Interface unit is a standard 19-inch rack-mounted unit with a nominal panel height of 1-3/4 inches."

PAGE 22

3.5.1.6,(10), Line 9:

Delete "Function" and substitute "Function for Full Configuration."

3.5.1.6,(10), W1, W2, W3 entries:

Delete W1, W2, and W3 entries entirely and substitute the following.

"W1	W1P1 W1P2	M39012/16-0008 M39012/16-0008	Composite Video from Power Panel to CV-3874/UPQ-5 input.
W2	W2P1 W2P2	M39012/16-0008 M39012/16-0008	Composite Video from CV-3874/ UPQ-5 output to RO-558/UPQ-5 input.
W3	W3P1 W3P2	M39012/16-0008 M39012/16-0008	Composite Video from RO-558/ UPQ-5 output to CV-3874/UPQ-5 input."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 23

Following 3.5.1.6, (10), Line 2:

Delete "Function" and substitute "Function for Full Configuration."

Preceding 3.5.1.6,(11):

Add the following lines.

"W9 W9P1 M39012/16-0008 Composite Video from CV-3874/UPQ-5 output to IP-1314/UPQ-5 input."
W9P2 M39012/16-0008

3.5.1.6,(11):

Delete entirely and substitute the following.

"(11) BNC Adapters - Two BNC feedthrough-type adapters (CP1 and CP2) in accordance with MIL-A-55339/13 (P/N M55339/13-00492) shall be provided to facilitate siganl bypass of either the Video Scan Converter or the Video Cassette Recorder (or both)."

PAGE 24

3.5.3:

Delete entirely and substitute the following.

"3.5.3 This paragraph deleted."

3.5.3.1:

Delete entirely.

3.5.3.2:

Delete entirely.

PAGE 25

3.5.3.3:

Delete entirely.

PAGE 31

3.5.7.2.1:

Delete entirely and substitute the following.

"Panel (Small) - The small panel provided to close off the Tape Duplicator Interface front-panel space shall be 1-23/32 inches high, 19 inches wide, and 0.125 inch thick."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 31 (CONT'D)

3.5.7.2.2: Delete entirely and substitute the following.

"Panel (Medium) - The medium panel provided to close off the Frequency Converter front-panel space shall be 3-15/32 inches high, 19 inches wide, and 0.125 inch thick."

Following 3.5.7.2.2: Insert the following new paragraph.

"3.5.7.2.3 Panel (Large) - The large panel provided to close off the Video Scan Converter and Video Cassette Recorder front-panel space shall be 8-23/32 inches high, 19 inches wide, and 0.125 inch thick."

3.5.7.2.3: Delete "3.5.7.2.3" and substitute "3.5.7.2.4."

PAGE 33

3.5.8.3: Delete entirely.

3.5.8.4, Line 1: Delete "3.5.8.4" and substitute "3.5.8.3."

3.5.8.4,(2), Line 6: Delete "W3" and substitute "W9."

PAGE 34

3.5.8.5: Delete entirely and substitute the following.

"3.5.8.4 Video Scan Converter Interface Requirements - The interface requirements for the Video Scan Converter, CV-3874/UPQ-5 are as follows:

(1) Mechanical - CV-3874/UPQ-5 is a rack-mounted unit 8-3/4 inches high, 19 inches wide, and 22 inches deep, weighing 75 pounds.

(2) Electrical - There are five electrical interface requirements for the Video Scan Converter. A power interface is accomplished by means of a line cord supplied with the unit. Signal interface is by Cable Assemblies W1, W3, W9 (see Figure 1 and sections 3.5.1 and 3.5.8.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 34 (CONT'D)

(3) Reference Documents - Additional interface data may be found by reference to the Engineering Drawing Package, Dwg 612641 (FSCM 99592), along with subordinate drawings and associated lists.

3.5.8.5 Video Cassette Recorder Interface Requirements - The interface requirements for the Video Cassette Recorder RO-558/UPQ-5 are as follows:

(1) Mechanical - RO-558/UPQ-5 is a rack-mounted 8-3/4 inches high, 19 inches wide, and 19-3/4 inches deep, weighing 66 pounds.

(2) Electrical - There are three electrical interface requirements for the Video Cassette Recorder. The 115 VAC power is applied to the RO-558/UPQ-5 through a power cord supplied with the unit. Signal interface is by Cable Assemblies W2 and W3. (See Figure 1, and sections 3.5.1 and 3.5.8.10).

(3) Reference Documents - Additional interface data may be found by reference to the Engineering Drawing Package, Dwg 612641 (FSCM 99592), along with subordinate drawings and associated lists."

3.5.8.6,(1), Line 3: Delete "3-1/2" and substitute "1-3/4."

PAGE 38

3.5.8.10, Line 2: Delete "W8" and substitute "W9".

Table II, LIne 2, W1, W2, & W3 Entry: Delete "& W3" and substitute "W3, & W9".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 39

Figure 2: Delete "RG-223/U" and substitute "RG-59/U"; delete "& W3" and substitute "W3, & W9".

PAGE 55

6.1: Delete entirely and substitute the following.

"6.1 Intended Use - The equipment cabinet described in this specification is intended to support the AN/UPQ-5 Mission Recorder Display Sets and AN/USH-17(V) Mission Recorder Sets currently deployed worldwide in both shipboard and shore installations. The cabinet provides mounting facilities, power and signal interface, and cooling air in a single enclosure for five classes of equipment used with the AN/UPQ-5 and AN/USH-17(V) system. First, operational installation facilities are provided for the IP-1314/UPQ-5 Video Indicator, which was an addition to the AN/UPQ-5 and for which no rack space was available in the basic equipment. Second, the cabinet provides nonoperating storage space for the SM-697/UPQ-5 Radar Signal Simulator and DA-662/UPQ-5 Electrical Dummy Load, two items of Peculiar Ground Support Equipment (PGSE) for an AN/UPQ-5. Third, this cabinet provides on-site storage (nonoperating) for selected Shop-Replaceable Assemblies (SRAs) of the AN/UPQ-5 and AN/USH-17(V) system. Fourth, the cabinet provides operational mounting facilities for the Video Scan Converter CV-3874/UPQ-5 and the Video Cassette Recorder RO-558/UPQ-5. Both units are items of the Peculiar Ground Support Equipment (PGSE) for the AN/UPQ-5. Fifth, the cabinet provides operational mounting facilities (including power and signal interfaces) for additional equipments planned for future expansion of the mission capability of the AN/UPQ-5 and AN/USH-17(V) system to include mission-tape duplicator capability. The equipments accommodated by the cabinet to support this future expansion are a uniquely configured AN/USH-17(V) Mission Recorder, a CV-2933A/UPQ-5 Static Frequency Converter, and a Duplicator Interface unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.

PAGE 58

6.7,(7): Delete entirely and substitute the following.

"(7) Video Scan Converter, CV-3874/UPQ-5."

6.7,(8): Delete entirely and substitute the following.

"(8) Video Cassette Recorder, RO-558/UPQ-5."

Custodians:
Navy-AS

Preparing Activity:
Navy-AS

Project No. 4920-N398

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:51Z
Check the source to verify that this is the current version before use.