

MILITARY SPECIFICATION SHEET

(A) CLAMP ASSEMBLY, SADDLE-TYPE CUSHIONED, PTFE, 321 CRES, -320°F TO 450°F, GENERAL PURPOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the clamps described herein shall consist of this document and the latest issue in effect of specification MIL-C-85449.

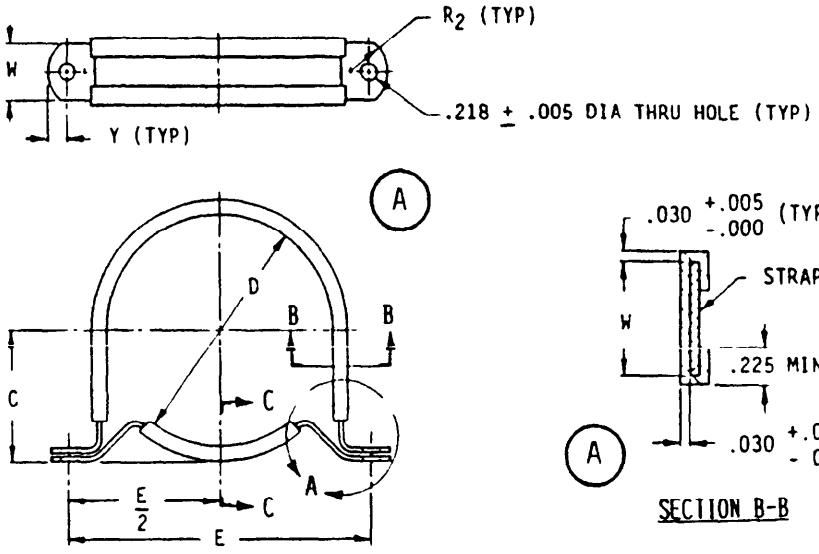

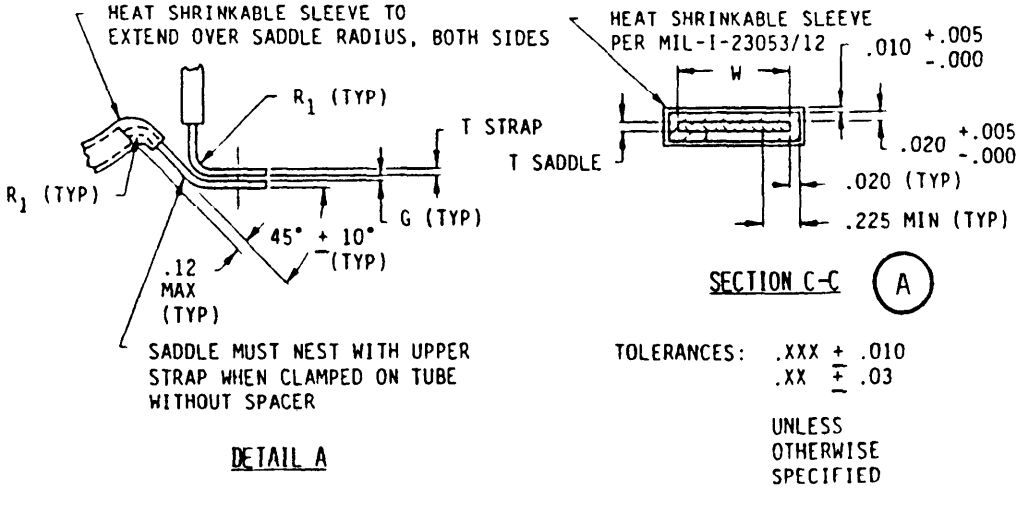

AMSC N/A

FSC 5340

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:52Z
Check the source to verify that this is the current version before use.

TABLE I. CLAMP DIMENSIONS (A)

DASH NO.	TUBE SIZE	C ± .020	D (5)	E ±.010 (5)	G ±.001 (7)	R_1	R_2	T (6)	W +.015 -.000	Y	WEIGHT, LBS. MAX.
-10	5/8	0.433	.625	1.525	.020	.090	.375	.040	.500	.218	
-12	3/4	0.495	.750	1.650							
-14	7/8	0.558	.875	1.775							
-16	1	0.640	1.000	1.958	.030	.109	.500	.050	.625	.250	
-18	1 1/8	0.703	1.125	2.083							
-20	1 1/4	0.765	1.250	2.208							
-24	1 1/2	0.890	1.500	2.458							
-28	1 3/4	1.015	1.750	2.708							
-32	2	1.153	2.000	3.016		.125		.063	.750		
-36	2 1/4	1.278	2.250	3.266							
-40	2 1/2	1.403	2.500	3.516							
-44	2 3/4	1.528	2.750	3.766							
-48	3	1.653	3.000	4.016							

REQUIREMENTS:

(A) Materials: Strap and Saddle - 321 CRES sheet per AMS 5510, except that a tensile strength of 100-120 KSI shall be required.

Cushion - Strap and Saddle Teflon sheet strip per ASTM-D-1457 Type I, extrude and heat formed to shape; color white. Saddle covered with heat shrinkable sleeve per MIL-I-23053/12 (see view C-C).

(A) Finish: Strap and Saddle - Ball burnish to round edges to a .010 radius, and passivated per QQ-P-35.


Marking: Impression stamp complete part number and manufacturer's trademark on strap, visible with cushion in place above the center line. The base shall have the dash size impression stamped in the vicinity of the mounting hole away from any bend radii.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:52Z
Check the source to verify that this is the current version before use.

Part No: Part numbers shall consist of the following: (In sequence)

1. The letter "M"
2. The basic specification number
3. A slash and slash number of this specification sheet
4. A dash and the appropriate size dash numbers from Table I

(A) Example:

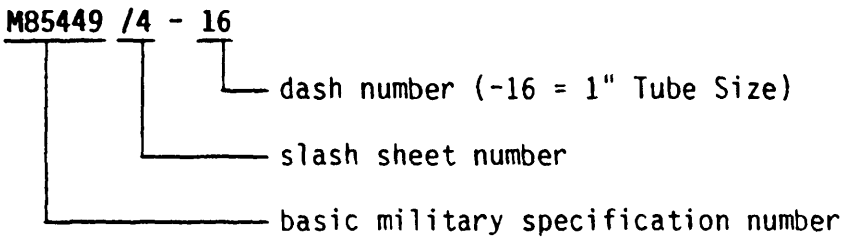

NOTES:

1. Dimensions in inches unless otherwise specified.
2. Metal parts shall be free of burrs, sharp edges, tool marks and die marks.
3. With clamp assembled on tube, no gap is permitted between cushion and tube for upper half of strap and cushioned length of saddle.
4. With cushion pushed to either end of strap, sufficient cushion shall be available to prevent strap contacting tube and saddle cushion shall contact both ends of saddle at Radius "R_1".

5> The "D" & "E" dimensions will be measured with mandrel clamped and a "G" thickness spacer between the clamp feet.

(A) 6> Tolerances per AMS 2242.

7> "G" dimension is for thickness of shim required to inspect assembled clamp.

(A) 8. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

INTENDED USE:

These clamps are intended for use as follows:

Temperature Range: -320°F to 450°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:52Z
Check the source to verify that this is the current version before use.

Systems:

1. All applications where exposed to a combination of fluids such as aromatic fuels, petroleum base fluids and synthetic oils. For less severe fluid exposure, the use of MIL-C-85449/1, /2 or /3 is recommended.

2. In systems with high vibration areas such as near pumps, motors, etc. It is to be noted that MIL-C-85449 requires vibration tests only up to the -24 clamp. Larger clamps used in high vibration areas should be subjected to additional testing.

Custodians:
Navy - AS
Air Force - 99
Army - AV

Reviewer Activities:
Air Force - 82
DLA - IS

Preparing Activity:
Navy - AS

Project No.: 5340-1834

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:52Z
Check the source to verify that this is the current version before use.