MILITARY SPECIFICATION SHEET

ELECTRON TUBE, CLIPPER, HYDROGEN

TYPE 8492

This amendment forms a part of Military Specification Sheet MIL-E-1/1514A, dated 8 February 1966, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 5

FIGURE 1: Delete and substitute new figure 1.

Review activities:
Navy - EC
DSA - ES


User activities:
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-N040)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:53Z
Check the source to verify that this is the current version before use.

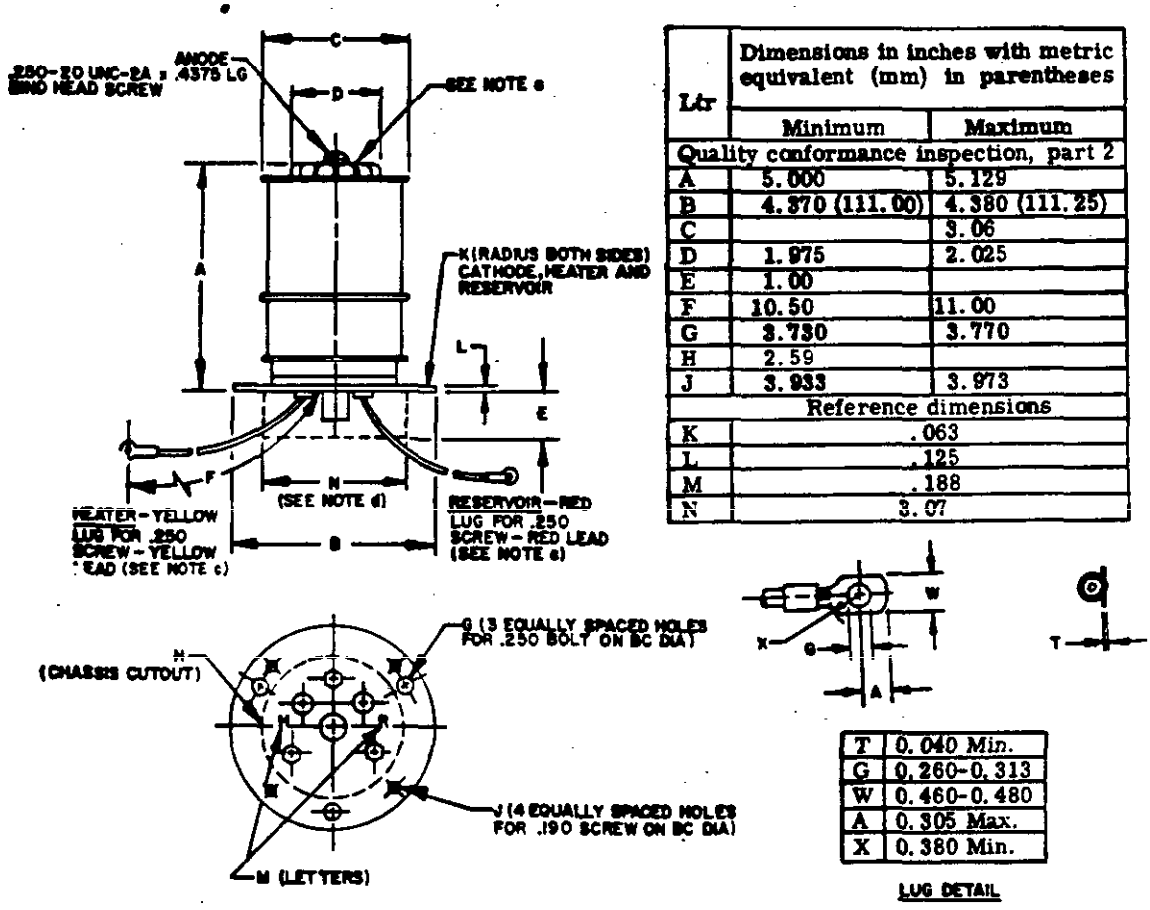

Ltr	Dimensions in inches with metric equivalent (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	5.000	5.129
B	4.370 (111.00)	4.380 (111.25)
C		3.06
D	1.975	2.025
E	1.00	
F	10.50	11.00
G	3.730	3.770
H	2.59	
J	3.933	3.973
Reference dimensions		
K	.063	
L	.125	
M	.188	
N	3.07	

T	0.040 Min.
G	0.260-0.313
W	0.460-0.480
A	0.305 Max.
X	0.380 Min.

LUG DETAIL

NOTES:
a. The use of an anode radiator is optional. If one is used it shall conform to the outline as shown.
b. In order to avoid damage to tube, the cathode connection must be made to the base flange only.
c. Lead terminal shall be in accordance with lug detail. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.
d. Below chassis clearance.

FIGURE 1. Outline drawing of electron tube type 8492.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:53Z
Check the source to verify that this is the current version before use.