MILITARY SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPES 6696A, 6697A, AND 6697AW

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tubes described herein shall consist of this document and the latest issue of Specification MIL-E-1 .

DESCRIPTION: Triode, metal-ceramic
See figures 1 and 2
Mounting position: 6696A - vertically, anode down, in water jacket
6697A and 6697AW - vertically, anode down, in air distributor
Weight: 6696A - 17 pounds (7.7 kilograms) nominal
6697A and 6697AW - 43 pounds (19.5 kilograms) nominal

ABSOLUTE RATINGS (Maximum):

Parameter: / Unit:	TYPE	Fl MHz	Ef V	Eb kVdc	Ec kVdc	Ib Adc	Ic Adc	Pg W	Pi kW	Pp kW	Seal & env temp °C	Cooling
C Teleg:	6696A	30	13.0 ±5%	16.0	-3.2	11.0	2.0	1,000	176	60	200	Note 1
	6697A, 6697AW	30	13.0 ±5%	16.0	-3.2	11.0	2.0	1,000	120	35	200	Note 2
C Telep:	6696A	30	13.0 ±5%	10.0	-3.2	8.5	2.0	1,000	85	40	200	Note 1
	6697A, 6697AW	30	13.0 ±5%	10.0	-3.2	8.5	2.0	1,000	81	23	200	Note 2
B/AB Audio:	6696A	--	13.0 ±5%	16.0	---	11.0	---	1,000	95	60	200	Note 1
	6697A, 6697AW	--	13.0 ±5%	16.0	---	11.0	---	1,000	55	35	200	Note 2
B Telep:	6696A	30	13.0 ±5%	16.0	---	9.0	---	1,000	144	60	200	Note 1
	6697A, 6697AW	30	13.0 ±5%	16.0	---	9.0	---	1,000	85	35	200	Note 2
AB rf Amp:	6696A	30	13.0 ±5%	16.0	---	11.0	---	1,000	150	60	200	Note 1
	6697A, 6697AW	30	13.0 ±5%	16.0	---	11.0	---	1,000	90	35	200	Note 2
TEST CONDITIONS:	6696A	--	13.0	---	---	---	---	---	---	---	---	Note 3
	6697A, 6697AW	--	13.0	---	---	---	---	---	---	---	---	Notes 4, 5

GENERAL:
Qualification - Required (See note 10)

Ⓓ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality Conformance Inspection, part 1								
1266	Total grid current	5, 8	Eb = 10.0 kVdc; Ec/Ib = 3.0 Adc; Pin = 30 kW; t = 300 seconds	0.65	II	Ic	---	-300	μAdc
1261	Electrode voltage (1) (anode)	-	Ec = -200 Vdc; Eb/Ib = 3.0 Adc	0.65	II	Eb (1)	5.6	7.2	kVdc
1261	Electrode voltage (2) (anode)	-	Ec = 0; Eb/Ib = 3.0 Adc	0.65	II	Eb (2)	1.9	2.9	kVdc
1236	Power oscillation	-	Eb = 20.0 kVdc; Ib = 6.0 Adc; Ic = 1.0 Adc (max); Rg = 3,000 ohms (max); Ec = -3,000 Vdc (max); F = 13.6 MHz (min); t = 600 seconds (min)	0.65	II	Po	75	---	kW (useful)
1231	Peak emission	-	eb = ec = 2,000 V	0.65	II	is	120	---	a
1261	Electrode voltage (grid)	-	Eb = 15.0 kVdc; Ec/Ib = 0.020 Adc	0.65	II	Eco	-800	-1,000	Vdc
1266	Primary grid emission	-	Anode grounded; Eg/Pg = 1,000 W; t = 20 seconds	0.65	II	Ieg	---	-5.0	mAdc
---	Cold grid current	9	Ef = 0; Anode floating; Ec = -15.0 kVdc	0.65	II	Ic	---	15	μAdc
	Quality Conformance Inspection, part 2								
1301	Filament current	-		---	---	If	190	210	A
1331	Direct-interelectrode capacitance	-	No shield	---	---	Cgp	47.0	57.0	pF
			No shield			Cgk	65.0	85.0	pF
			No shield			Cpk	2.0	3.2	pF
	Quality Conformance Inspection, part 3								
---	Life test	6	Group D; filament cycling; Ef = 13.0 V; "on" time = 3.5 ±20% hrs; "off" time = 15 ±20% minutes t = 500 hrs	---	---	---	---	---	---
---	Life-test end points								
1266	Total grid current	-		---	---	Ic	---	-330	μAdc
1261	Electrode voltage (grid)	-		---	---	Ec	-800	-1,000	Vdc
1231	Peak emission	-		---	---	is	120	---	a
---	Mechanical resonance (type 6697AW only)	7, 11	No voltages applied	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. Forced-air cooling of the base and seals may be required, depending on ambient conditions and operating frequency. Airflow rate and direction should be determined to limit seal and envelope temperatures to 200° C maximum and to maintain uniform temperature distribution around the seals. Minimum cooling requirements for the anode are shown, based on use of the Machlett Laboratories Inc. F-17393 water jacket, the EIMAC SK-1620 water jacket, or equivalent.

Anode diss. (kW)	Water flow rate (gpm)	Approx. press. drop (psi)
20	5.7	1.3
30	8.0	2.1
40	11.2	3.3
50	14.5	5.0
60	18.0	7.2

2. Forced-air cooling of the base and seals may be required, depending on the ambient conditions and the operating frequency. Airflow rate and direction should be determined to limit seal and envelope temperatures to 200° C maximum and to maintain uniform temperature distribution around the seals. Minimum cooling requirements for the anode are shown, based on a maximum incoming air temperature of 50° C at sea level, and the use of the air distributor shown in figure 3, Machlett Laboratories Inc. F-17759 air distributor, EIMAC SK-1606A air distributor, or equivalent.

Anode diss. (kW)	Airflow (cfm)	Approx. press. drop (inches of water)
10	240	0.2
20	700	1.5
30	1,350	5.0
35	1,700	8.0

In cases where long life and consistent performance are factors, cooling in excess of minimum requirements is normally beneficial.

3. During test, it shall be permissible to use forced-air cooling of the envelope and base and water cooling of the anode, in accordance with the provisions of note 1.

4. During test, it shall be permissible to use forced-air cooling of the envelope, base, and anode, in accordance with the provisions of note 2.

5. At the option of the manufacturer, types 6697A and 6697AW tubes may be tested according to this specification as water-cooled tubes before assembly with the anode cooler (radiator) in which case only the total grid-current test (method 1266) need be made on the assembled tube. A holding period of 72 hours minimum (after attaching cooler) should elapse before making the total grid-current test.

6. The operating time, t, is the total "on" time. Demonstration of satisfactory compliance to the life-test requirements listed by any of the three types shall satisfy the requirements for all three types.

7. This test shall be performed on the grid-cathode structure, with the anode and envelope removed. The structure shall be supported by the grid terminal and mounted with its axis perpendicular to the direction of vibration. With a constant total displacement of approximately 0.002 inch (0.05 mm), the frequency shall be varied from 10 to 50 to 10 Hz. When viewed under light from a stroboscope, no resonance below 30 Hz shall be indicated.

8. This test is to be the first test performed at the conclusion of the holding period.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:52Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

9. The cold grid-current test shall be performed using the circuit shown in figure 4, or equivalent. The Ec voltage shall be raised to the specified value but at no time shall the resultant Ic exceed 100 μAdc. When the specified value of Ec is reached, the tube shall be held under this condition until the Ic requirement is met. Residual equipment leakage current may be subtracted from the indicated Ic reading.

10. Compatibility testing will be required in addition to the requirements stated herein. A sample of eight each tube types 6696A and 6697A shall be subjected to compatibility testing. The 6696A shall be subjected to compatibility testing in the AN/FRT-67. The 6697A shall be subjected to compatibility testing in the AN/FRT-31. Compatibility testing shall be considered satisfactorily completed when the samples have accumulated a total of 3,200 operating hours without a failure. Each tube must operate at least 400 hours. In the event of a failure, the remaining tubes must accumulate a total of 3,600 operating hours. If more than one failure occurs, the sample shall be rejected. Compatibility testing will be conducted at each installation on a noninterference basis. Only manufacturers which have passed compatibility testing will be considered qualified.

Ⓓ 11. This test shall be performed yearly. A regular double sampling plan shall be used with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, AQL 6.5, inspection level S3. The yearly double sampling plan may be reinstated after three consecutive samples have been accepted.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 80
DSA - ES


User activities:
Army - AV, ME, WC
Navy - AS, OS, CG

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-3021)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

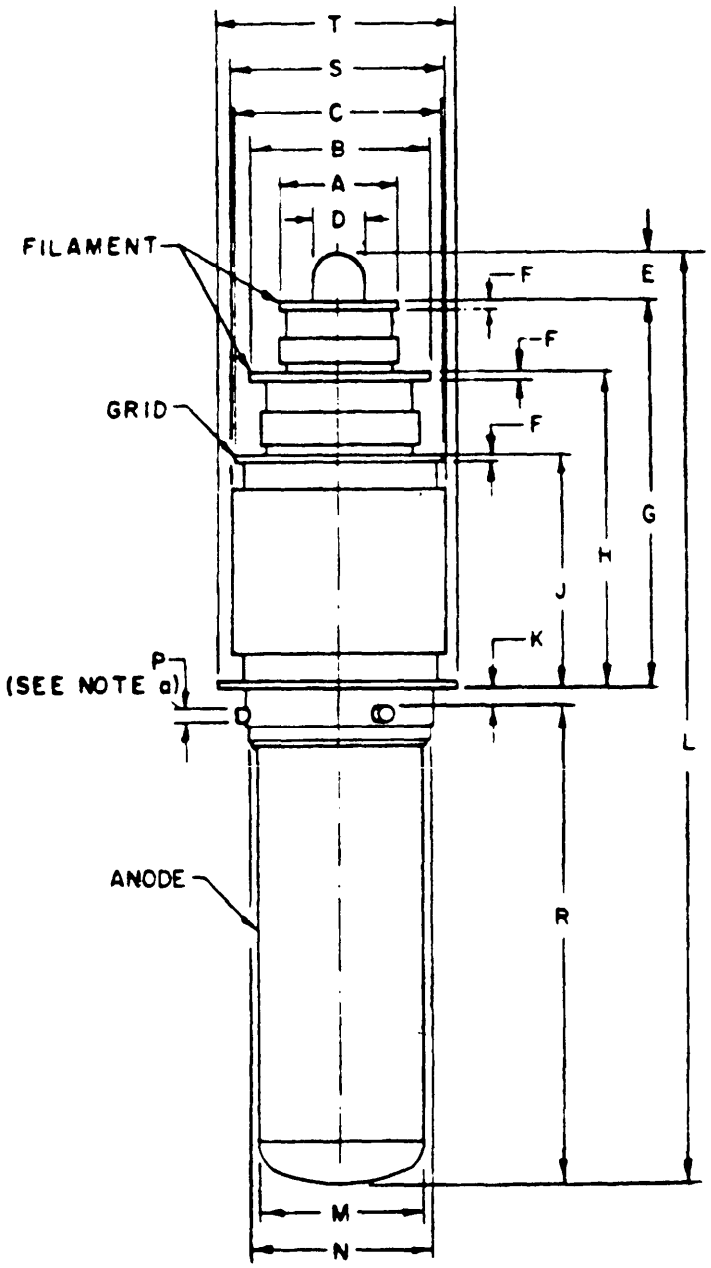

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
G	7.750 (196.85)	8.000 (203.20)
K	.406 (10.31)	.469 (11.91)
L		19.375 (492.13)
M	3.485 (88.52)	3.515 (89.28)
N	3.990 (101.35)	4.000 (101.60)
P	.300 (7.62)	.320 (8.13)
R	9.750 (247.65)	10.000 (254.00)
Quality conformance inspection, part 3 (SEE NOTE b)		
A	2.469 (62.71)	2.531 (64.29)
B	3.469 (88.11)	3.531 (89.69)
C	4.619 (117.32)	4.681 (118.90)
D		1.187 (30.15)
E		1.000 (25.40)
F	.125 (3.18)	
H	6.500 (165.10)	6.750 (171.45)
J	4.812 (122.22)	4.937 (125.40)
S		4.720 (119.89)
T		5.280 (134.11)


NOTES:

a. Three bayonet pins, dimension P diameter; length: min .292 (7.42 mm), max .354 (8.99 mm), nominally 120° apart.

b. Dimensions shall be checked during the initial production and annually thereafter. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, AQL 6.5, inspection level S3. Annual double sampling plan may be reinstated after three consecutive samples have been accepted.

FIGURE 1. Outline drawing of electron tube type 6696A.


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

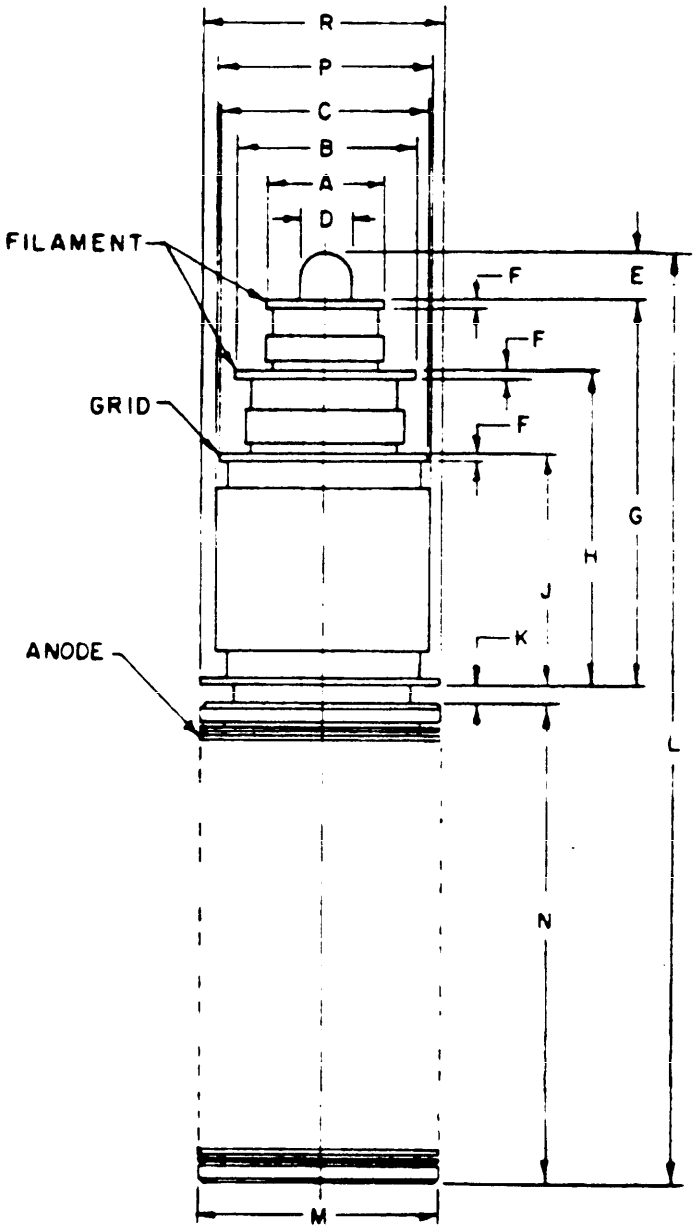

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
L		19.875 (504.83)
M	5.219 (132.56)	5.281 (134.14)
N	10.000 (254.00)	10.250 (260.35)
Quality conformance inspection, part 3 (SEE NOTE b, FIGURE 1)		
A	2.469 (62.71)	2.531 (64.29)
B	3.469 (88.11)	3.531 (89.69)
C	4.619 (117.32)	4.681 (118.90)
D		1.187 (30.15)
E		1.000 (25.40)
F	.125 (3.18)	
G	7.750 (196.85)	8.000 (203.20)
H	6.500 (165.10)	6.750 (171.45)
J	4.812 (122.22)	4.937 (125.40)
K	.312 (7.92)	
P		4.720 (119.89)
R		5.280 (134.11)

FIGURE 2. Outline drawing of electron tube types 6697A and 6697AW.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

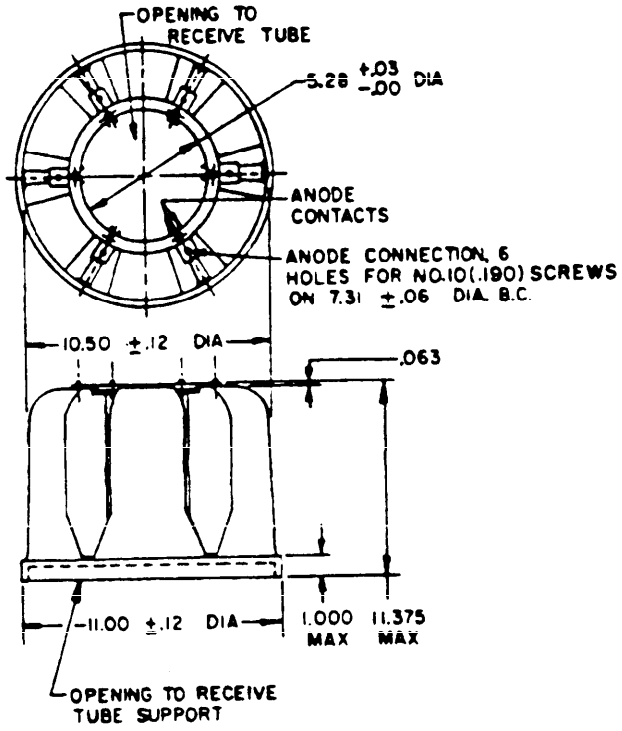

INCHES	MM
.03	.76
.06	1.52
.063	1.60
.12	3.05
.190	4.83
1.000	25.40
5.28	134.11
7.31	185.67
10.50	266.70
11.00	274.40
11.375	288.93

NOTE:
Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 3. Air distributor for tube type 6697A.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:52Z
Check the source to verify that this is the current version before use.

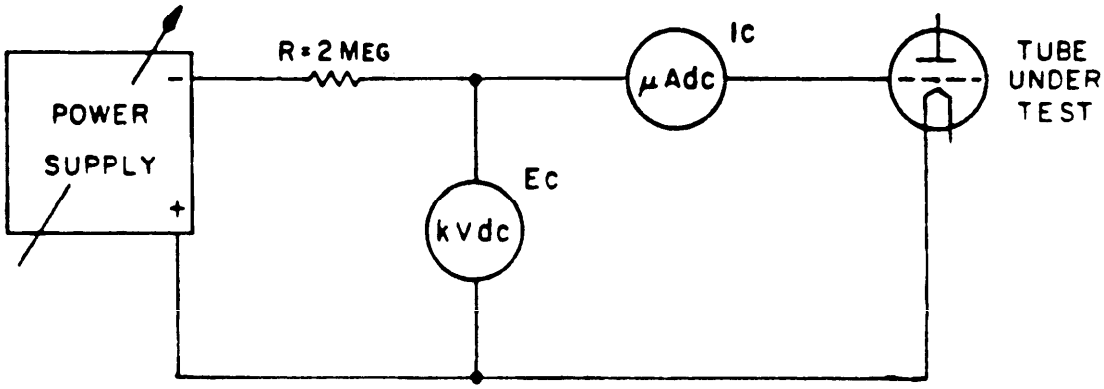


FIGURE 4. Test circuit for cold grid-current test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:52Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*.

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:52Z
Check the source to verify that this is the currentversion before use.