MIL-C-22442/28A(AS)
2 September 1988
SUPERSEDING
MIL-C-22442/28(AS)
22 March 1985

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-13128/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

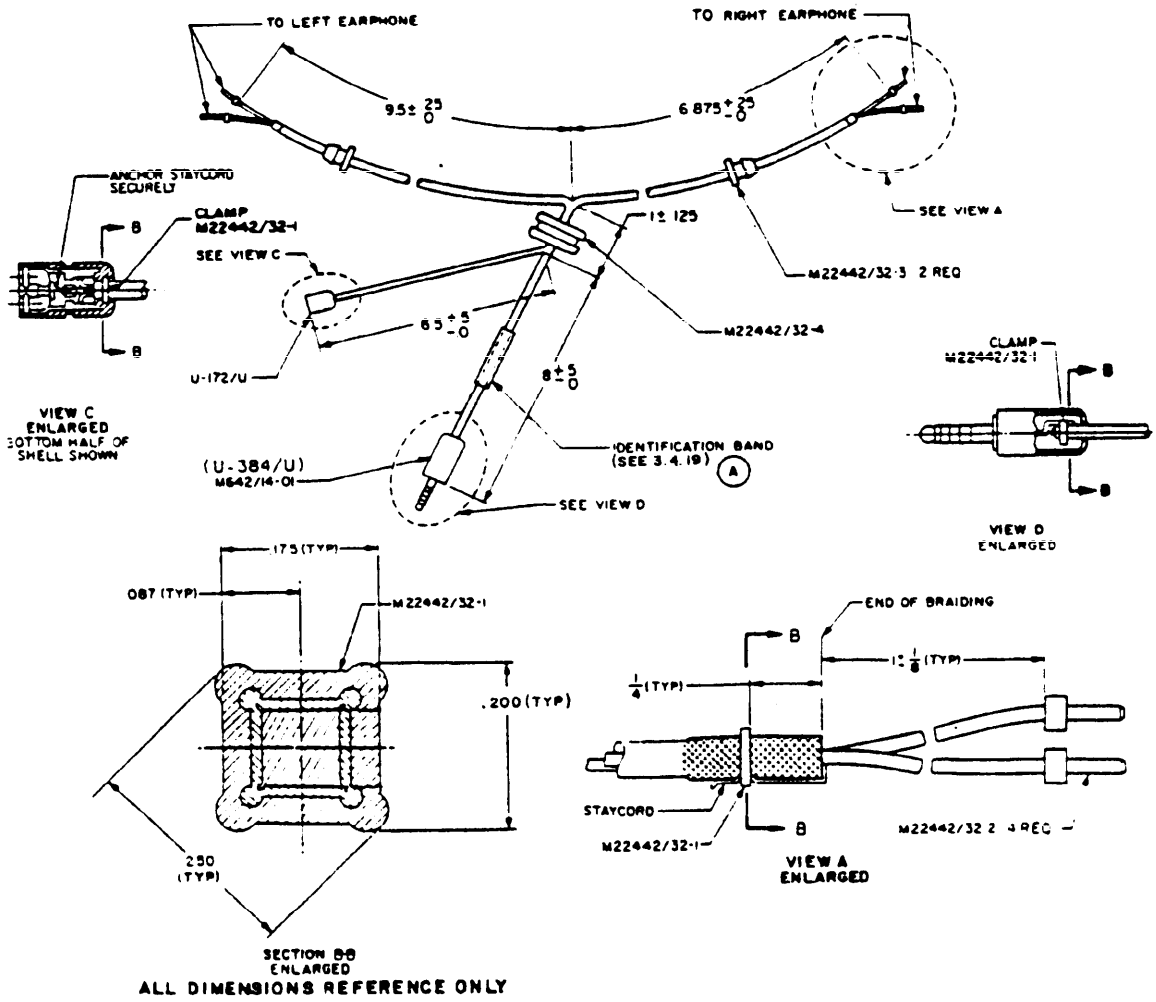


FIGURE 1. Cable assembly CX-13128/A P/N M22442/28-1.

FSC 5995

AMSC N/A

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

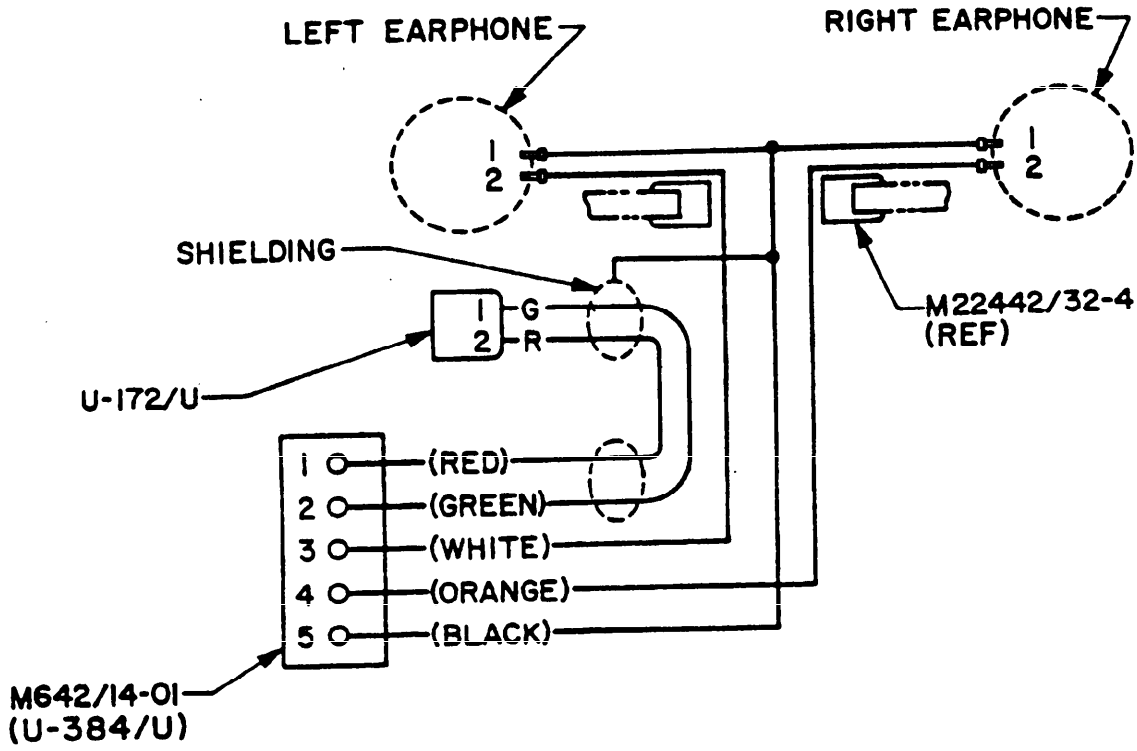


FIGURE 2. Cable assembly P/N M22442/28-1 CX-13128/A schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-P-642/14 Plugs, Telephone, and Accessory Screws, General Specification for

REQUIREMENTS:

1. The cable (cord) shall be in accordance with M22442/35-3.

(A) 2. The weight of the cable assembly shall not be greater than 3 ounces.

3. The stay cord shall be firmly attached to the connectors.

(A) 4. The DC resistance shall be less than 2 ohms between the following contacts:

(a) Contact 1 of P/N M642/14-01 (U-384/U) and contact 2 of U-172/U.

(b) Contact 2 of P/N M642/14-01 (U-384/U) and contact 1 of U-172/U.

(c) Contact 3 of P/N M642/14-01 (U-384/U) and contact 2 of the left earphone contact.

(d) Contact 4 of P/N M642/14-01 (U-384/U) and contact 2 of the right earphone contact.

(e) Contact 5 of P/N M642/14-01 (U-384/U) and contact 1 of the left earphone and contact 1 of the right earphone.

5. The following parts shall be supplied in plastic bag with each cable:

(a) One P/N M22442/32-5 nut, tee.

(b) One P/N M22442/32-6 screw, visor housing.

(c) One P/N M22442/32-7 clip, cable.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Naval Air Systems Command Drawing 765AS288.

Preparing Activity:
Navy - AS
Project No. 5995-N120-14

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:30Z
Check the source to verify that this is the currentversion before use.

(A) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
GROUP C					
Durabilility 1/	3.5.13	4.6.15	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:30Z
Check the source to verify that this is the current version before use.