INCH-POUND
MIL-DTL-22442/24C(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/24B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY AIRCRAFT AUDIO, CX-l3017/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

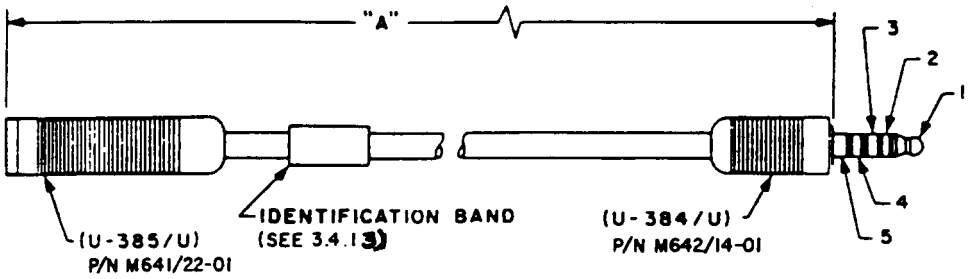

FIGURE 1. Cable Assembly CX-13017/AR.

TABLE I. Part Numbers

DIMENSION A	PART NUMBER	WEIGHT MAX
2 FT - 4 IN Min	M22442/24-1	2 OUNCES
2 FT - 8 IN Min	M22442/24-2	2 OUNCES
3 FT - 4 IN Min	M22442/24-3	3 OUNCES
7 FT - 0 IN Min	M22442/24-4	4 OUNCES

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

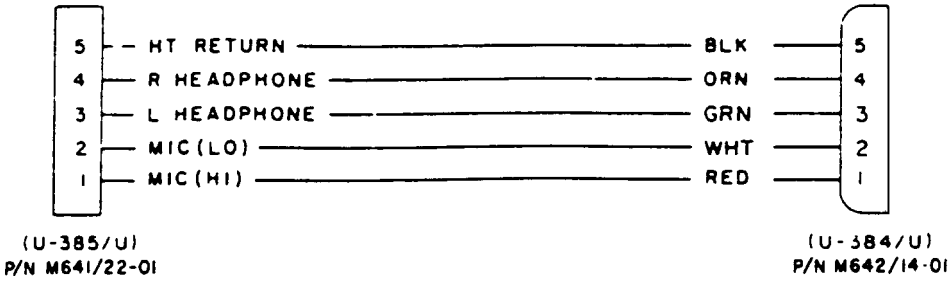

FIGURE 2. Cable Assembly CX-13017/AR Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-C-10392 - Cord Electrical (Audio, Miniature)

MIL-J-641/22 - Jacks, Telephone, U-385

MIL-P-642/14 - Plugs, Telephone, (Type U-384/U) 5 Conductor, Single

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U or equal.

2. The weight of the cable assembly shall be in accordance with Table I.

3. The stay cord shall be firmly attached to the connectors.

4. The DC resistance shall be less than 2 ohms between the following contacts when tested with an ohmmeter.

(a) Contact 5 of P/N M641/22-01 (U-385/U) and contact 5 of P/N M642/14-01 (U-384/U).

(b) Contact 4 of P/N M641/22-01 (U-385/U) and contact 4 of P/N M642/14-01 (U-384/U).

(c) Contact 3 of P/N M641/22-01 (U-385,'U) and contact 3 of P/N M641/14-01 (U-384/U).

(d) Contact 2 of P/N M641/22-01 (U-385/U) and contact 2 of P/N M641/14-01 (U-384/U).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

(e) Contact l of P/N M64l/22-0l (U-385/U) and contact l of P/N M64l/l4-0l (U-384/U).

5. The cable assembly shall be tested in accordance with the tests listed in Table II.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.5 inches unless otherwise specified.

3. MIL-C-8l866 is superseded by MIL-DTL-22442/24.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0l28-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

TABLE II. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
GROUP C					
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.