INCH-POUND
MIL-DTL-22442/25B(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/25A (AS)
6 October 1983

DETAIL SPECIFICATION SHEET

ASSEMBLY, AIRCRAFT AUDIO, MOLDED RUBBER CONNECTOR MECHANICAL GAUGES

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

APPLICABLE DOCUMENTS:

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-G-10944 - Gage, Dimensional Control

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services

* Non-Government Publications. The following documents forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitations (see 6.3).

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A681	-	Standard Specification for Tool Steel, Alloy (DoD adopted)
ASTM B221	-	96 Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

REQUIREMENTS:

1. The gauges in this specification sheet shall be used to assure quality conformance of the M22442/2-1 and M22442/2-2 connectors.

2. The contractor shall furnish certification of the mechanical gauge dimensions in accordance with MIL-G-10944 at the time of acceptance inspection of mechanical gauges. A tool number (serial number) will be assigned each mechanical gauge at time of acceptance by the Government and the contractor shall etch the number on the respective tool. If gauges have been certified by another Government agency they will be acceptable.

*3. Mechanical gauges shall be used only for qualification First Article and quality conformance inspection in accordance with the specification.

4. The contractor shall make mechanical gauges available to the Government Quality Assurance representative in accordance with inspection requirements specified in the contract.

*5. The steel shall be in accordance with ASTM A681 Type F2 or Type A2 or equivalent (as approved by the qualifying activity).

6. All non-gauging surfaces shall be finished in accordance with MIL-G-10944.

7. Screw threads shall be in accordance with FED-STD-H28.

8. Mechanical fits shall be in accordance with MIL-G-10944.

*9. The aluminum shall be in accordance with ASTM B211, Alloy 2024, Temper 3511 or equivalent (as approved by the qualifying activity).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

TABLE I Military gage number

MILITARY GAGE NUMBER	U.S. ARMY CODE IDENT 80063 DRAWING NUMBER
M22442/25-1	SM-D-327307
M22442/25-2	SM-D-327308
M22442/25-3	SM-D-327309
M22442/25-4	SM-D-327310
M22442/25-5	SM-D-327312
M22442/25-6	SM-D-327313
M22442/25-7	SM-D-327314
M22442/25-8	SM-D-327315
M22442/25-9	SM-D-327316
M22442/25-10	SM-D-327318
M22442/25-11	SM-D-327319
M22442/25-12	SM-D-327320
M22442/25-13	SM-D-327322
M22442/25-16	NA
M22442/25-17	NA

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

NOTES:

1. Dimensions are in inches unless otherwise specified. Tolerances are $\pm$ .015 for 2 place decimals, and $\pm$ 1 degree for angles unless otherwise specified.

2. Break all unnecessary sharp edges and corners.

*3. The parts specified on this specification sheet are for use on completed and tested cable assemblies. Qualification of individual parts and components is not required.

Preparing activity:
Navy - AS
(Project No. 5995-0128-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

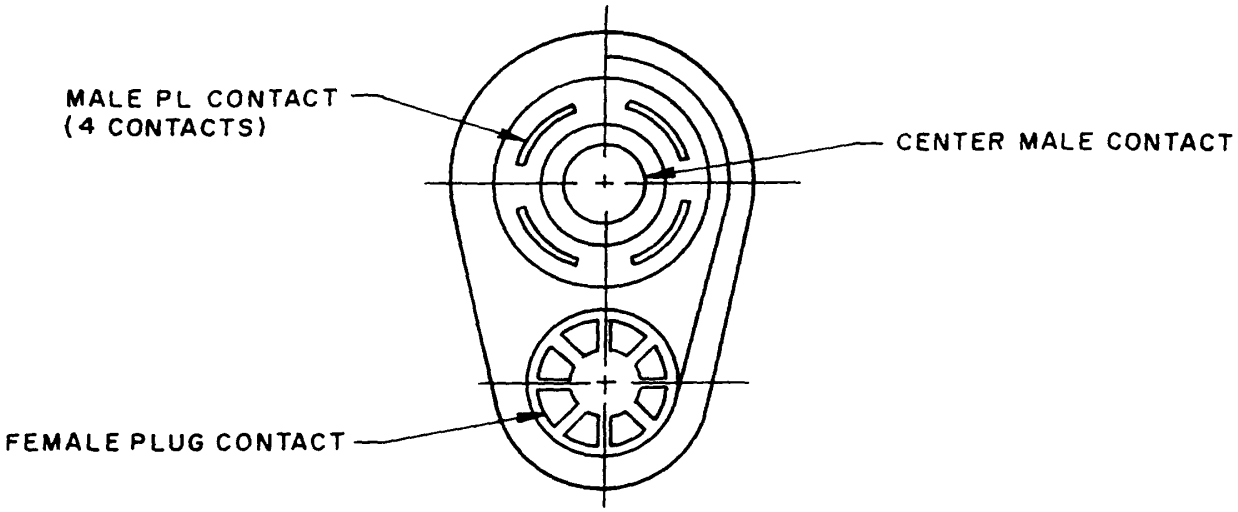


FIGURE 1. P/N M22442/2-1 Contact identification.

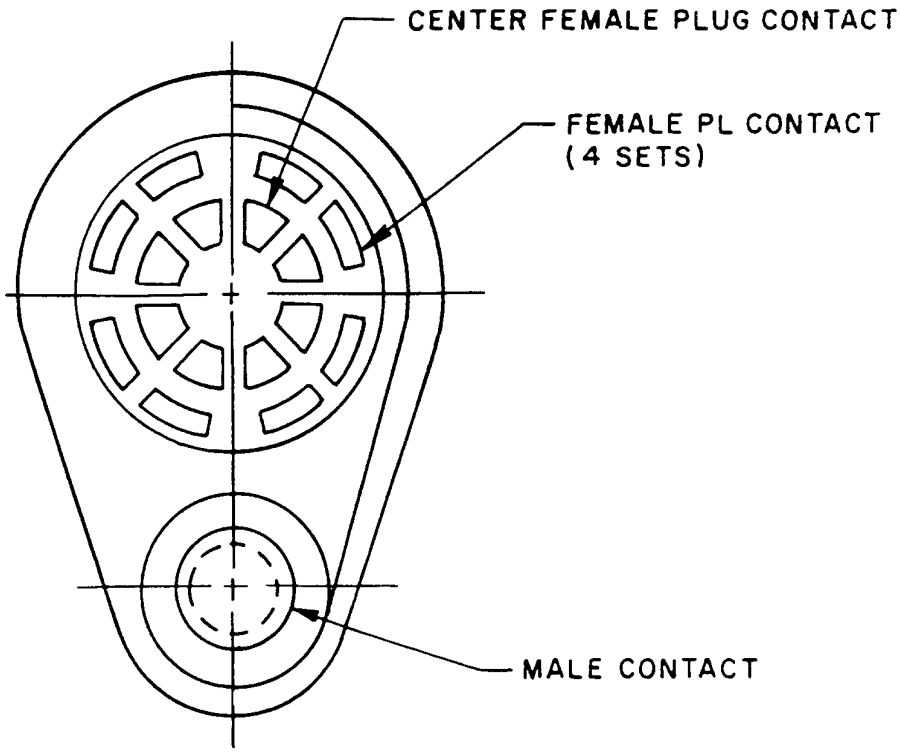


FIGURE 2. P/N M22442/2-2 Contact identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

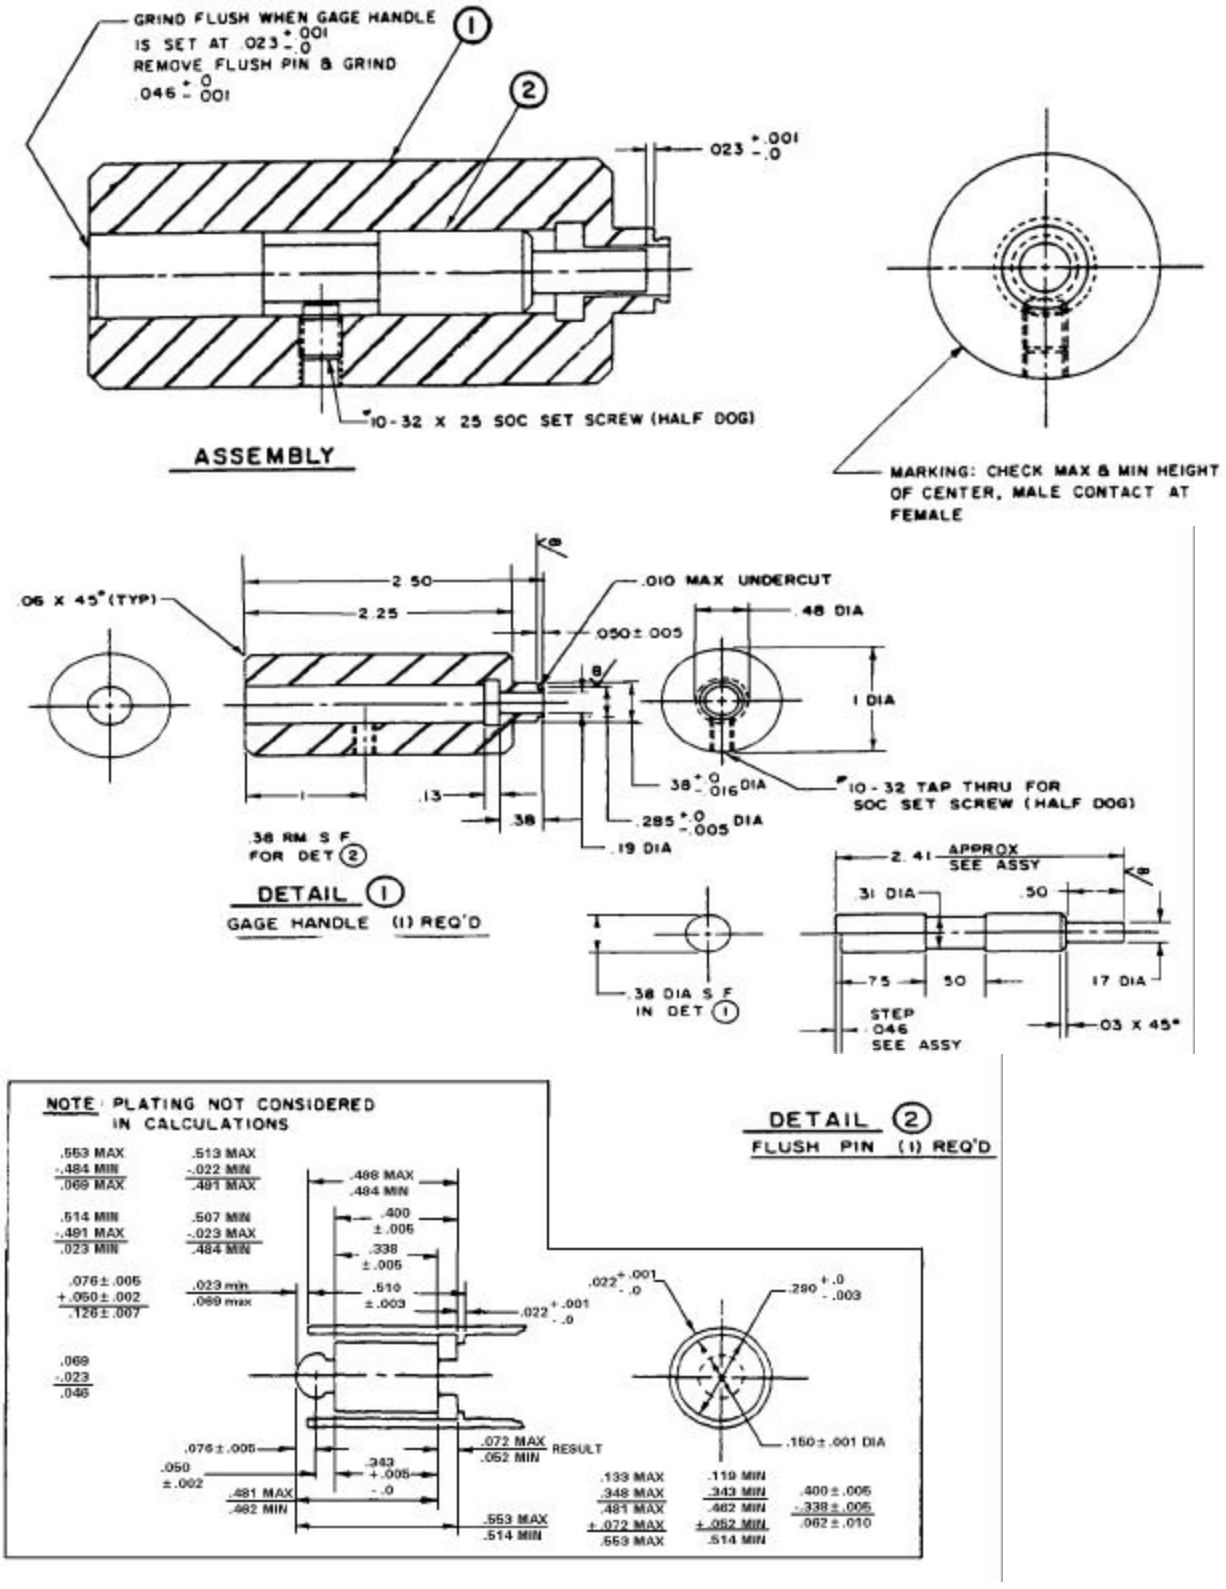
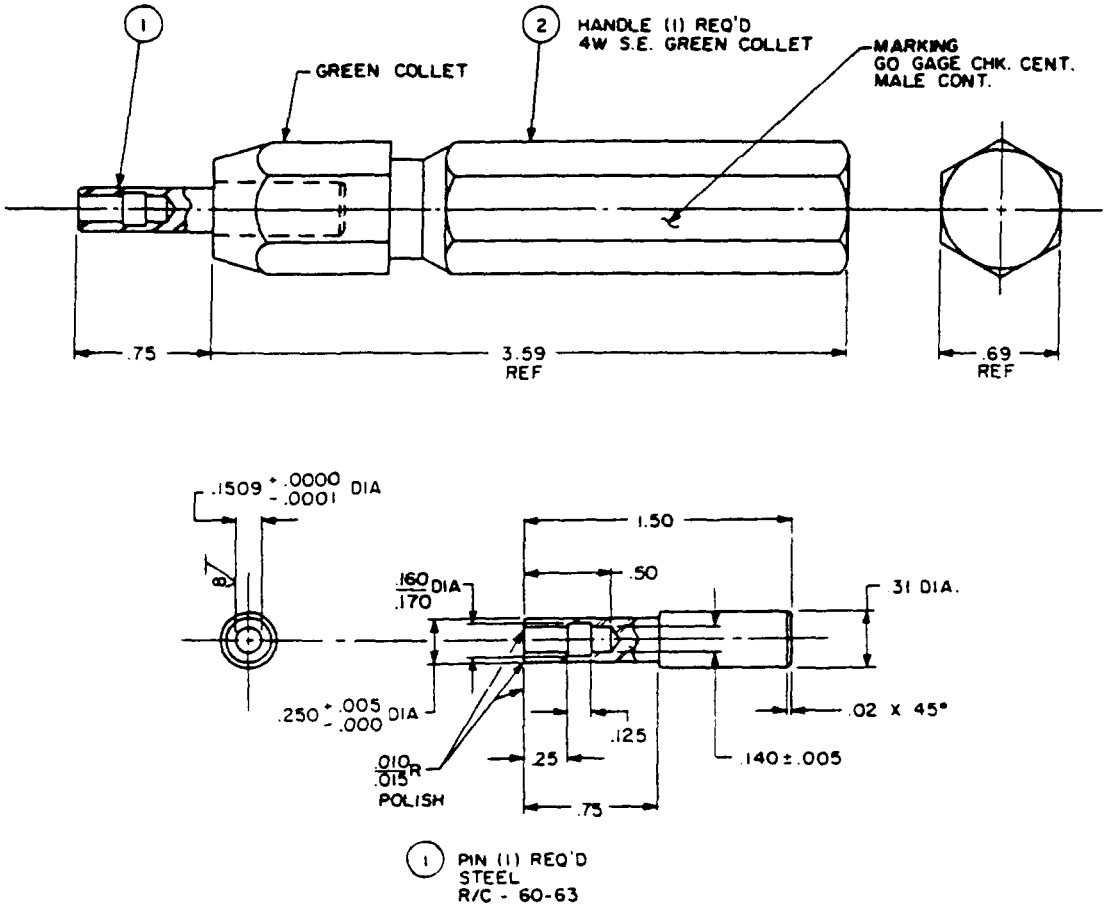


FIGURE 3. M22442/25-1 Gage, check max & min height of center, male contact. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.



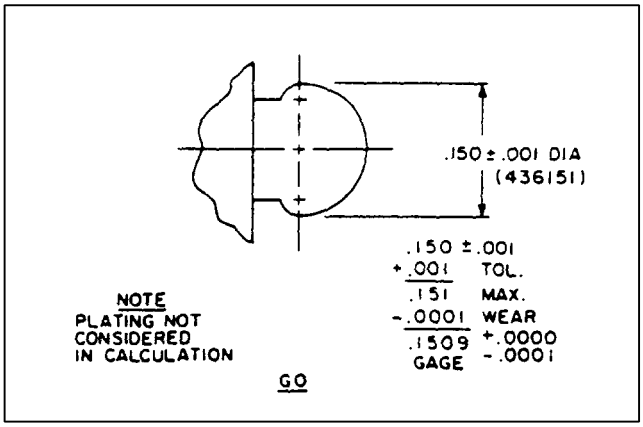


FIGURE 4. M22442/25-2 Go gage to check diameter of center male contact.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

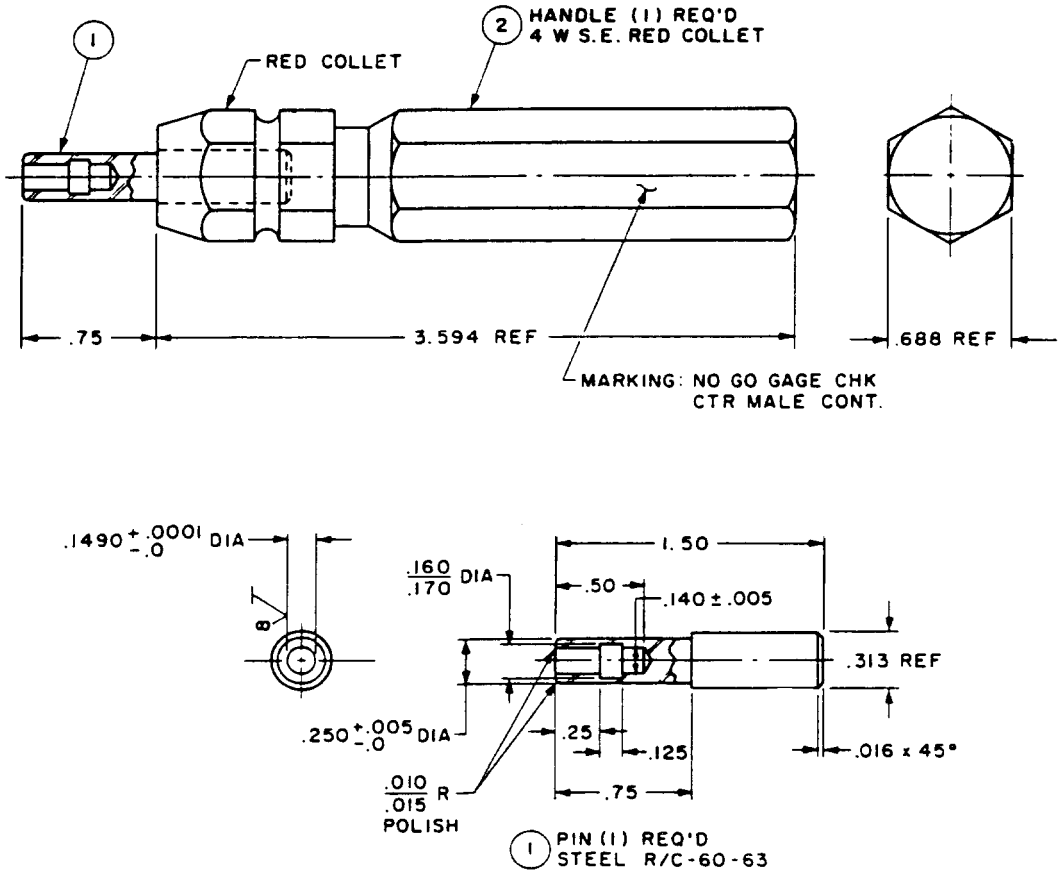
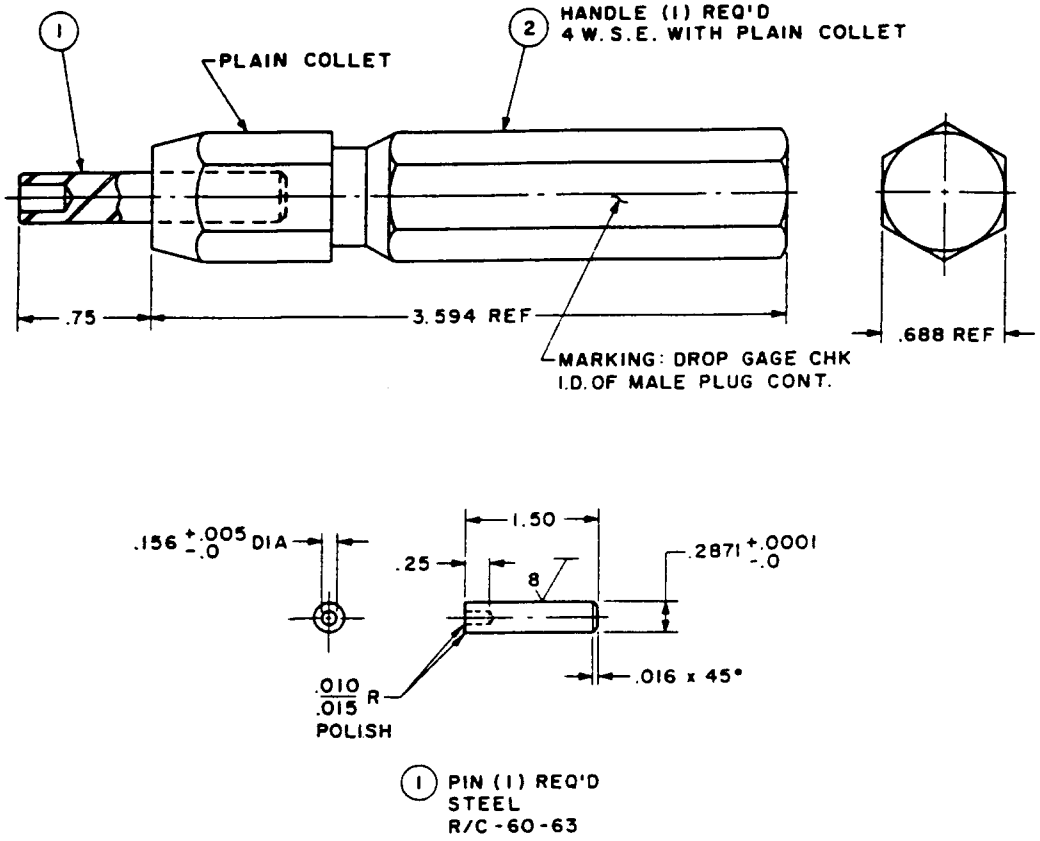


FIGURE 5. M22442/25-3 No go gage to check diameter of center male contact.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.



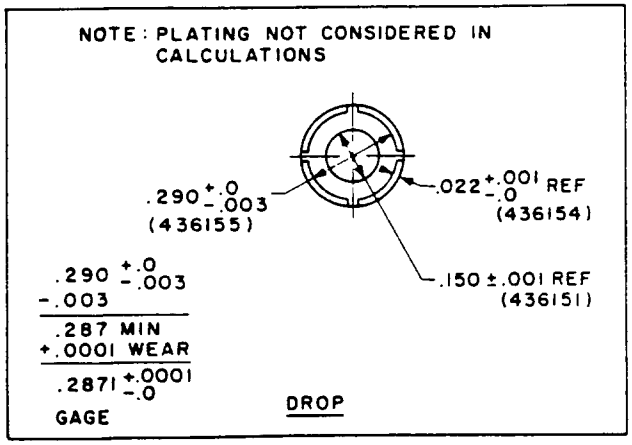


FIGURE 6. M22442/25-4 Drop gage to check ID of male pl contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

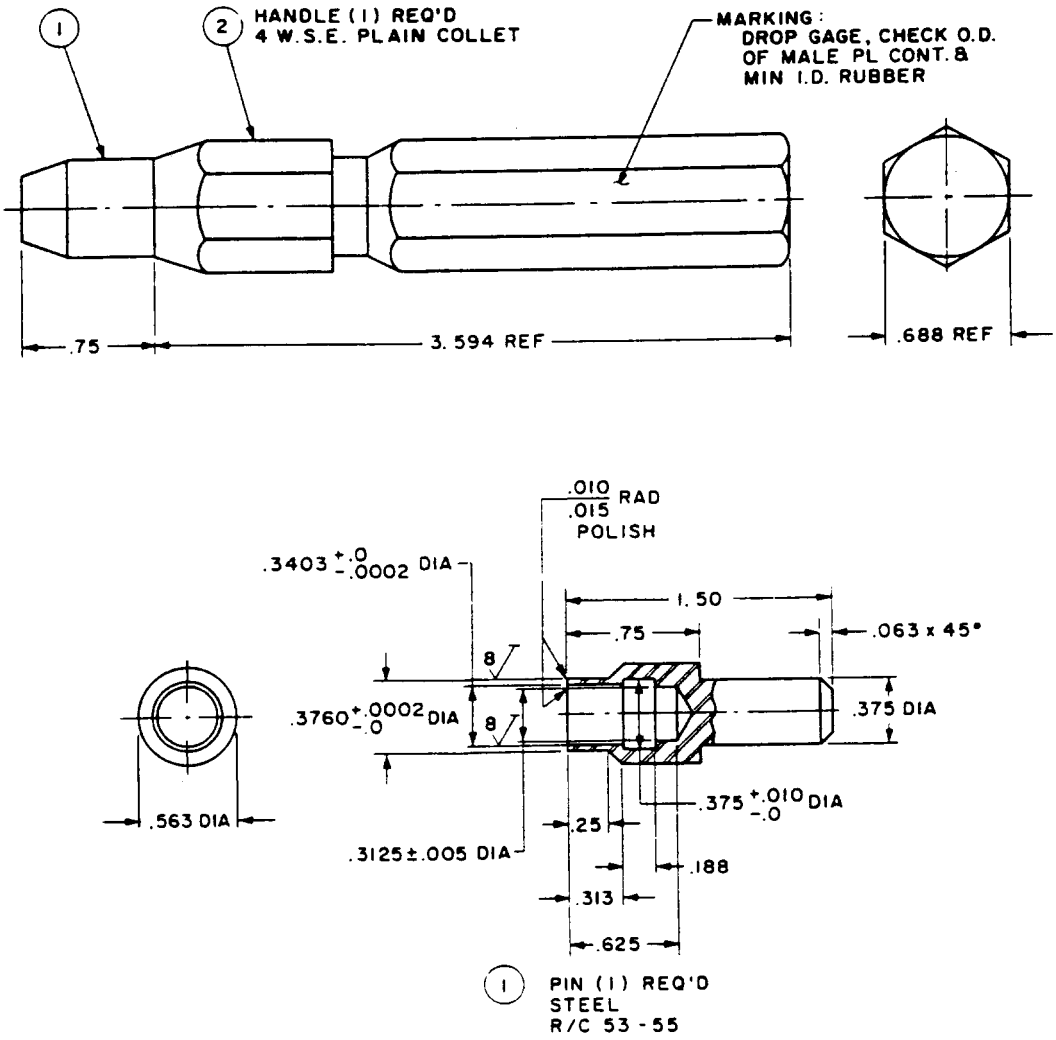
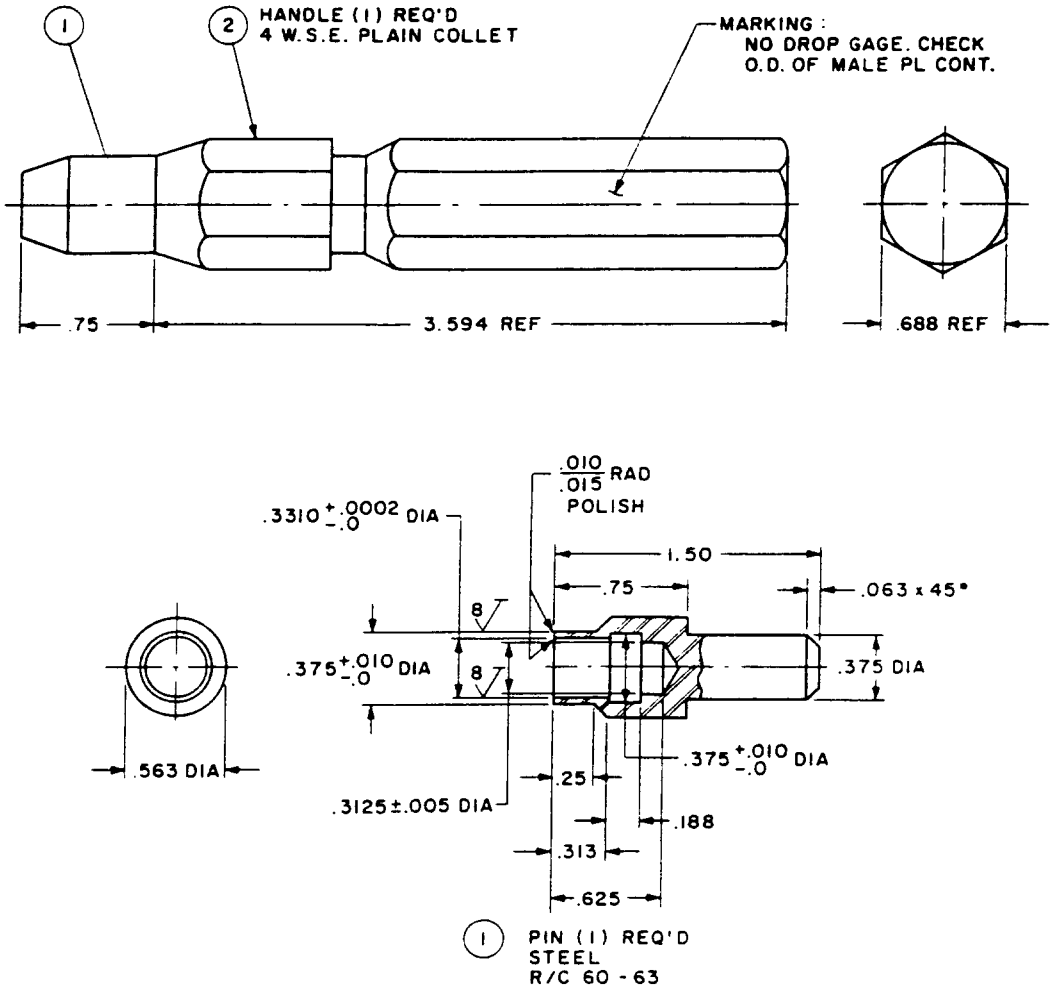


FIGURE 7. M22442/25-5 Drop gage to check OD. of male pl contact & min ID rubber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.



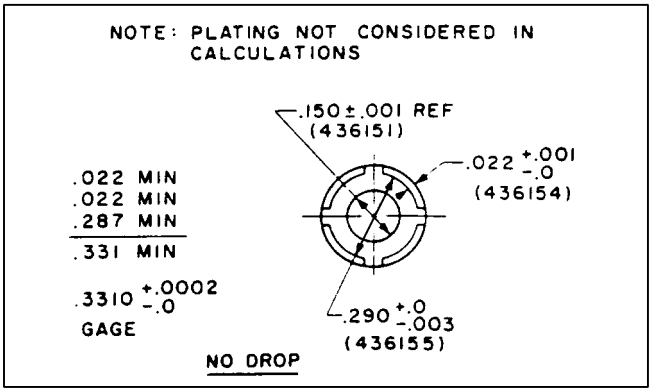
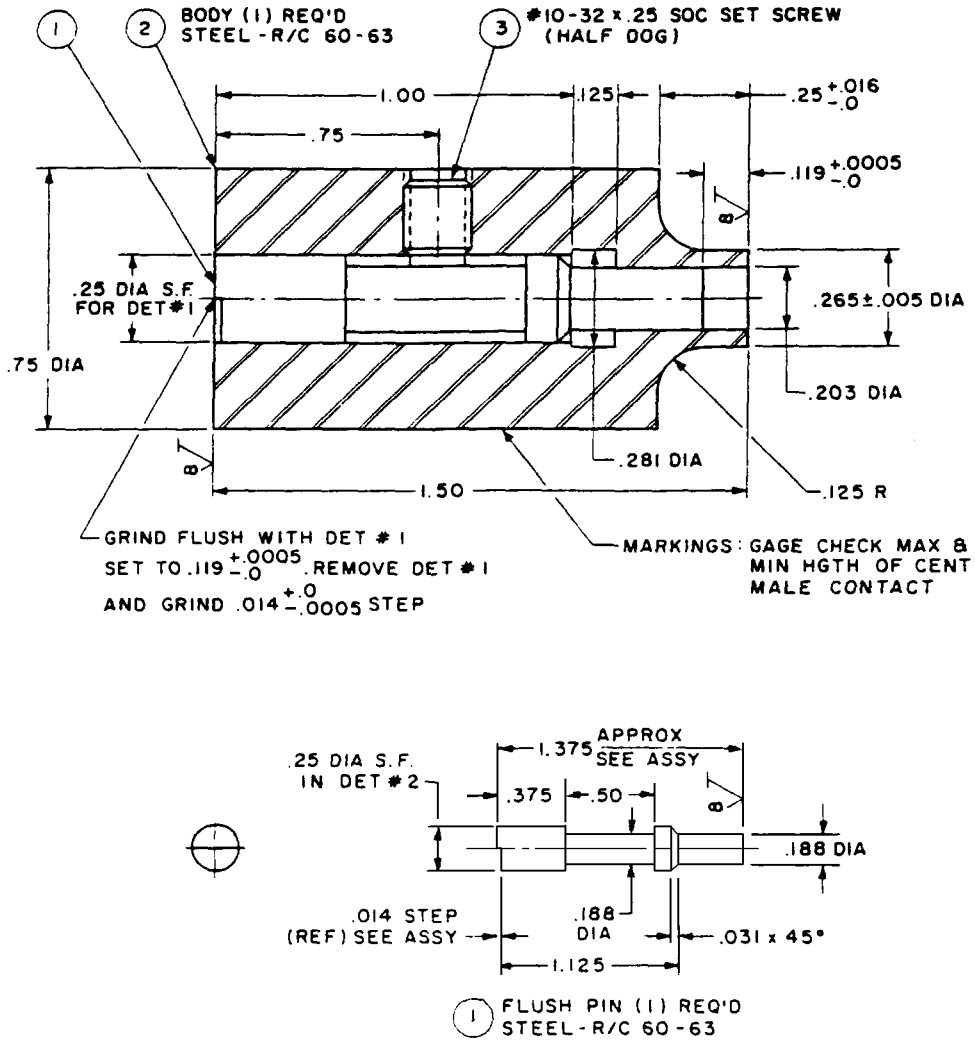


FIGURE 8. M22442/25-6 No drop gage to check OD of male pl contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.



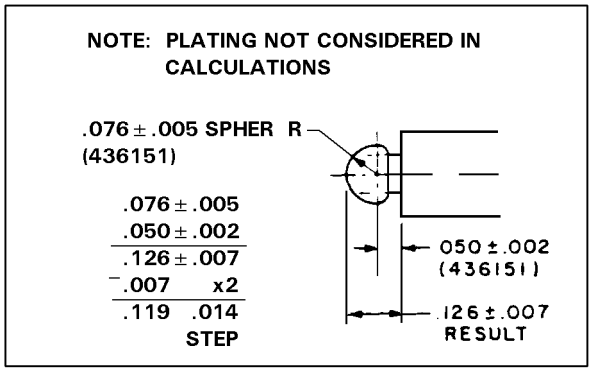


FIGURE 9. M22442/25-7 Gage to check max & min height of cent male contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

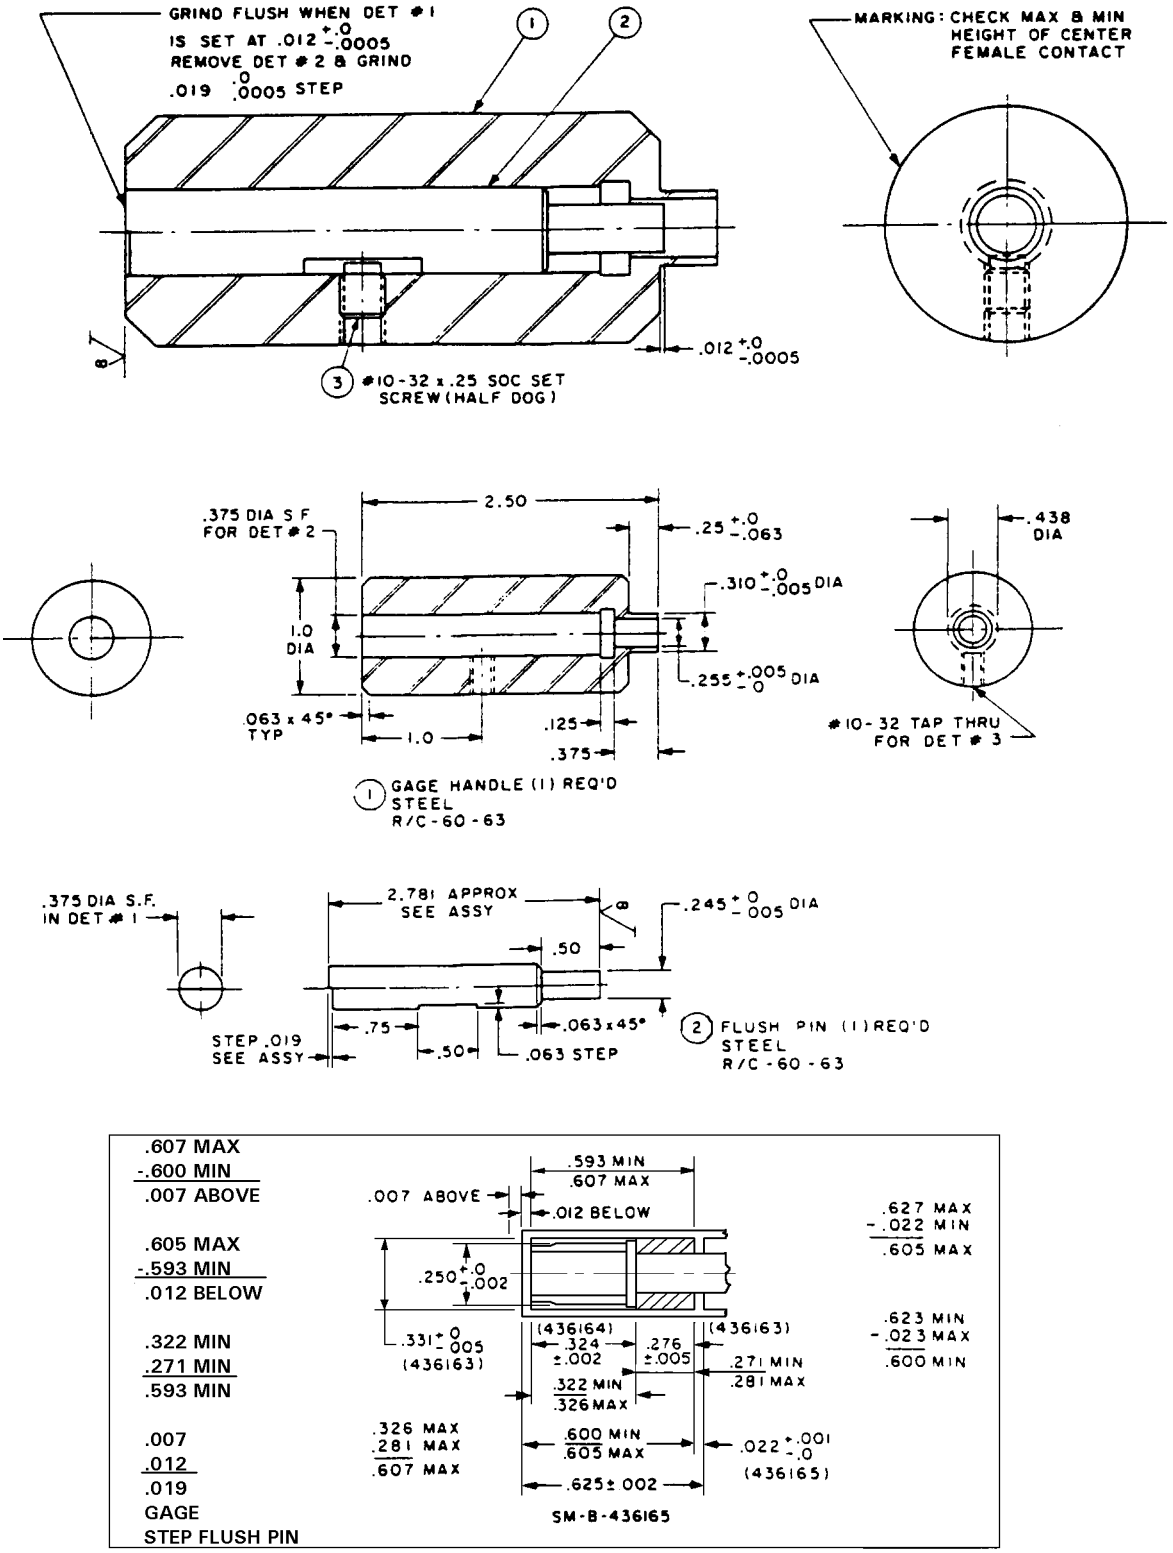
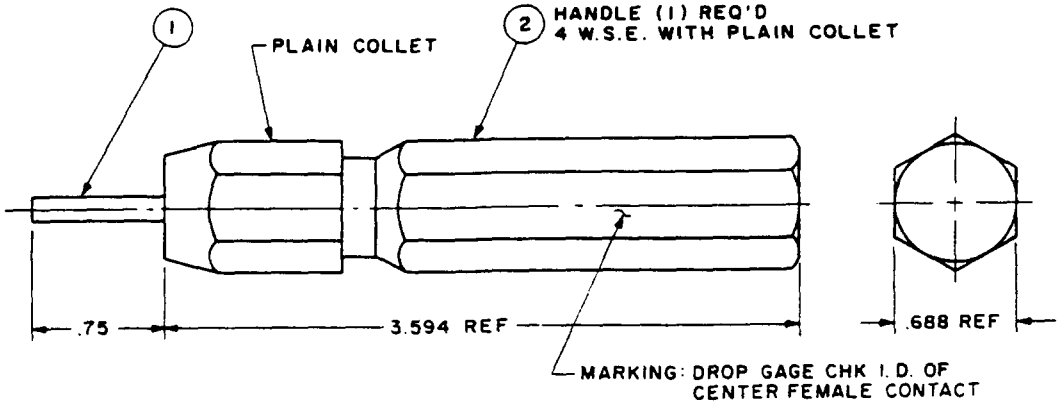
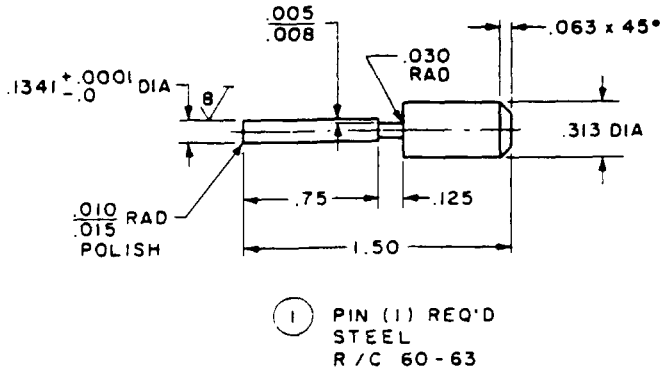


FIGURE 10. M22442/25-8 Gage to check max & min height of cent female contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.





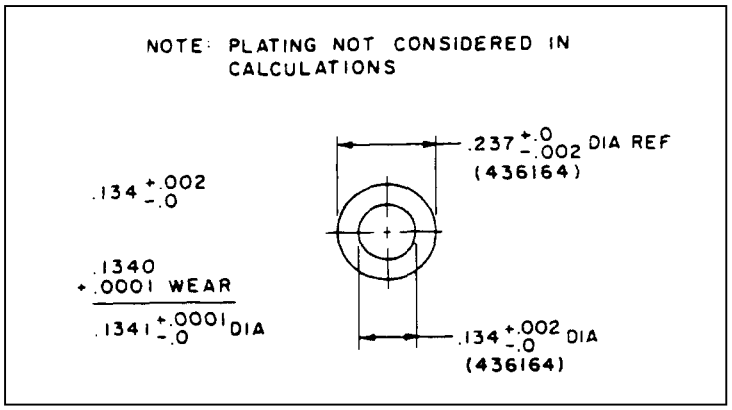


FIGURE 11. M22442/25-9 Drop gage to check ID of center female plug contact and female plug contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

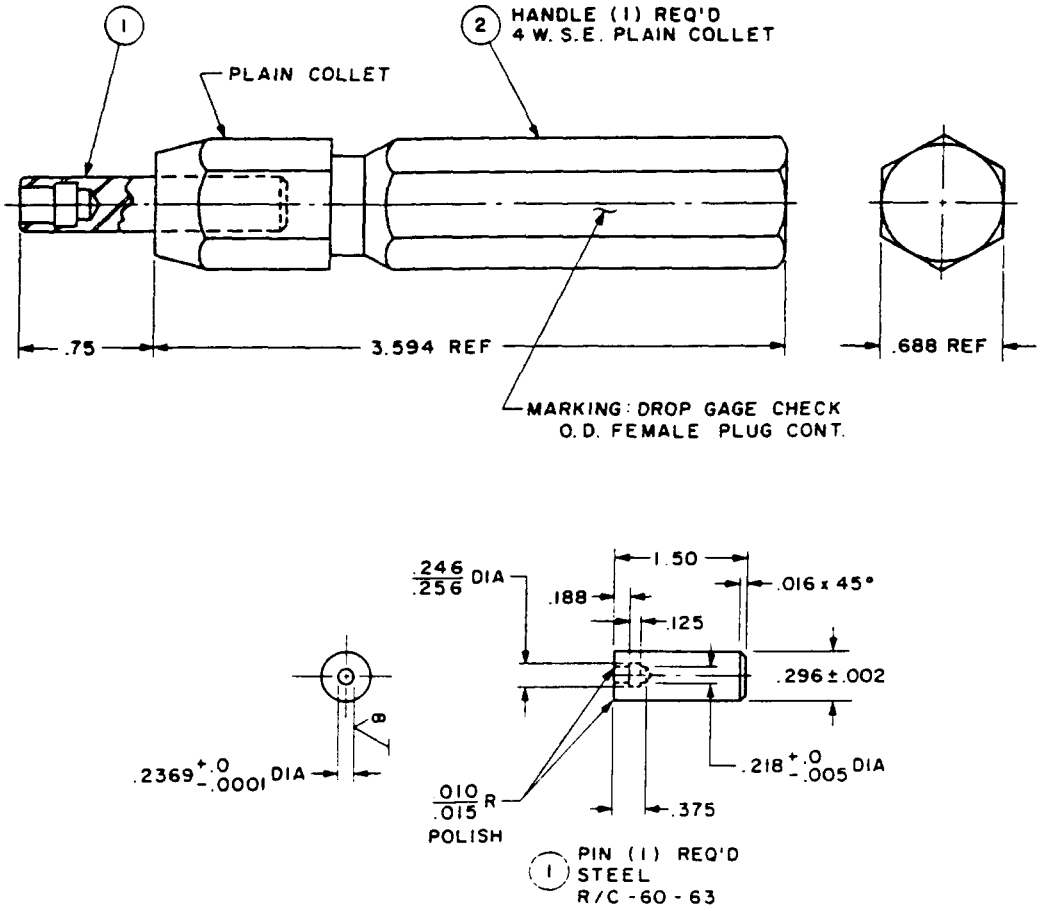
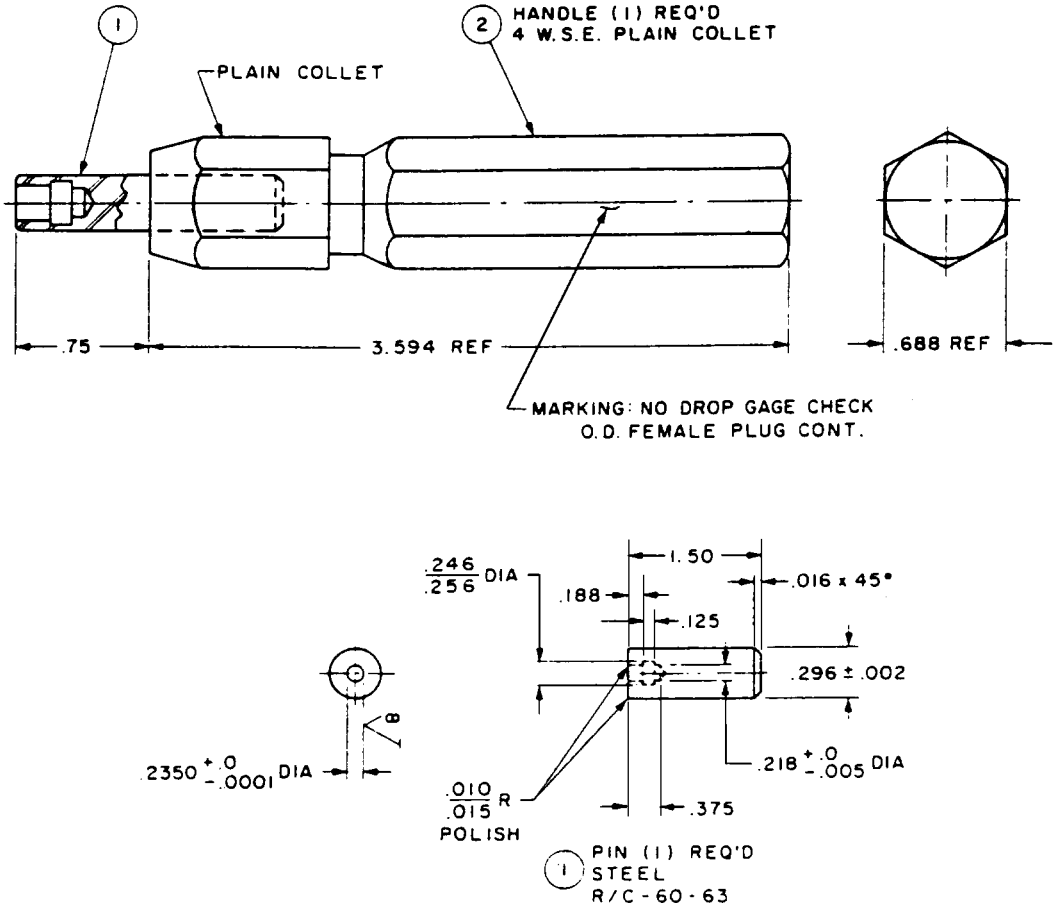


FIGURE 12. M22442/25-10 Drop gage to check OD female plug contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.



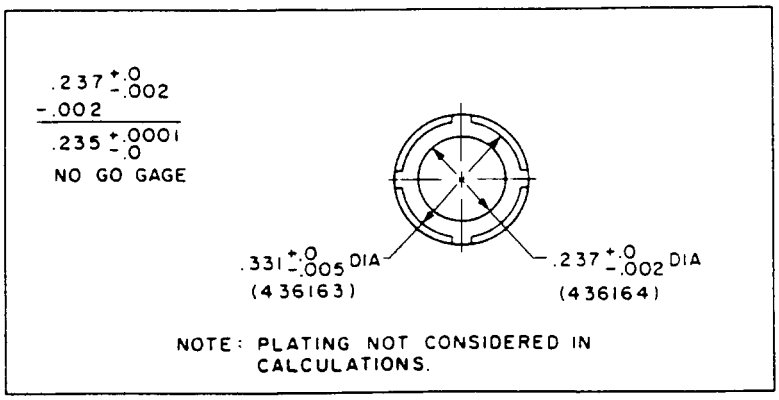


FIGURE 13. M22442/25-11 No drop gage to check OD of female plug contact and OD of center female plug contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

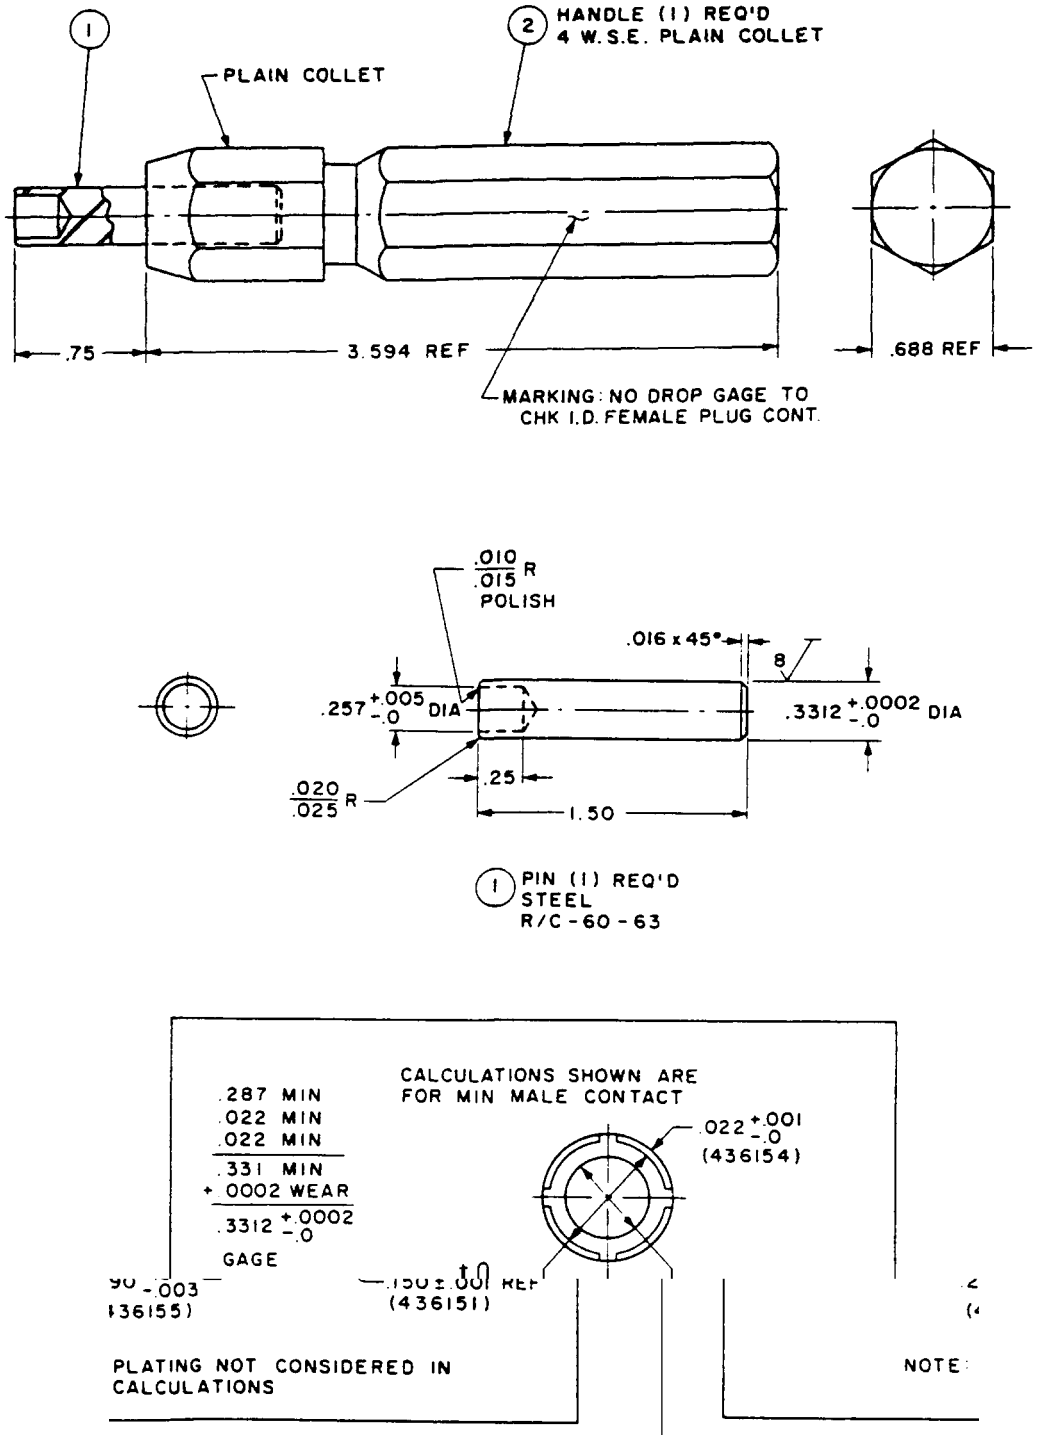


FIGURE 14. M22442/25-12 No drop gage to check ID of female pl contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.


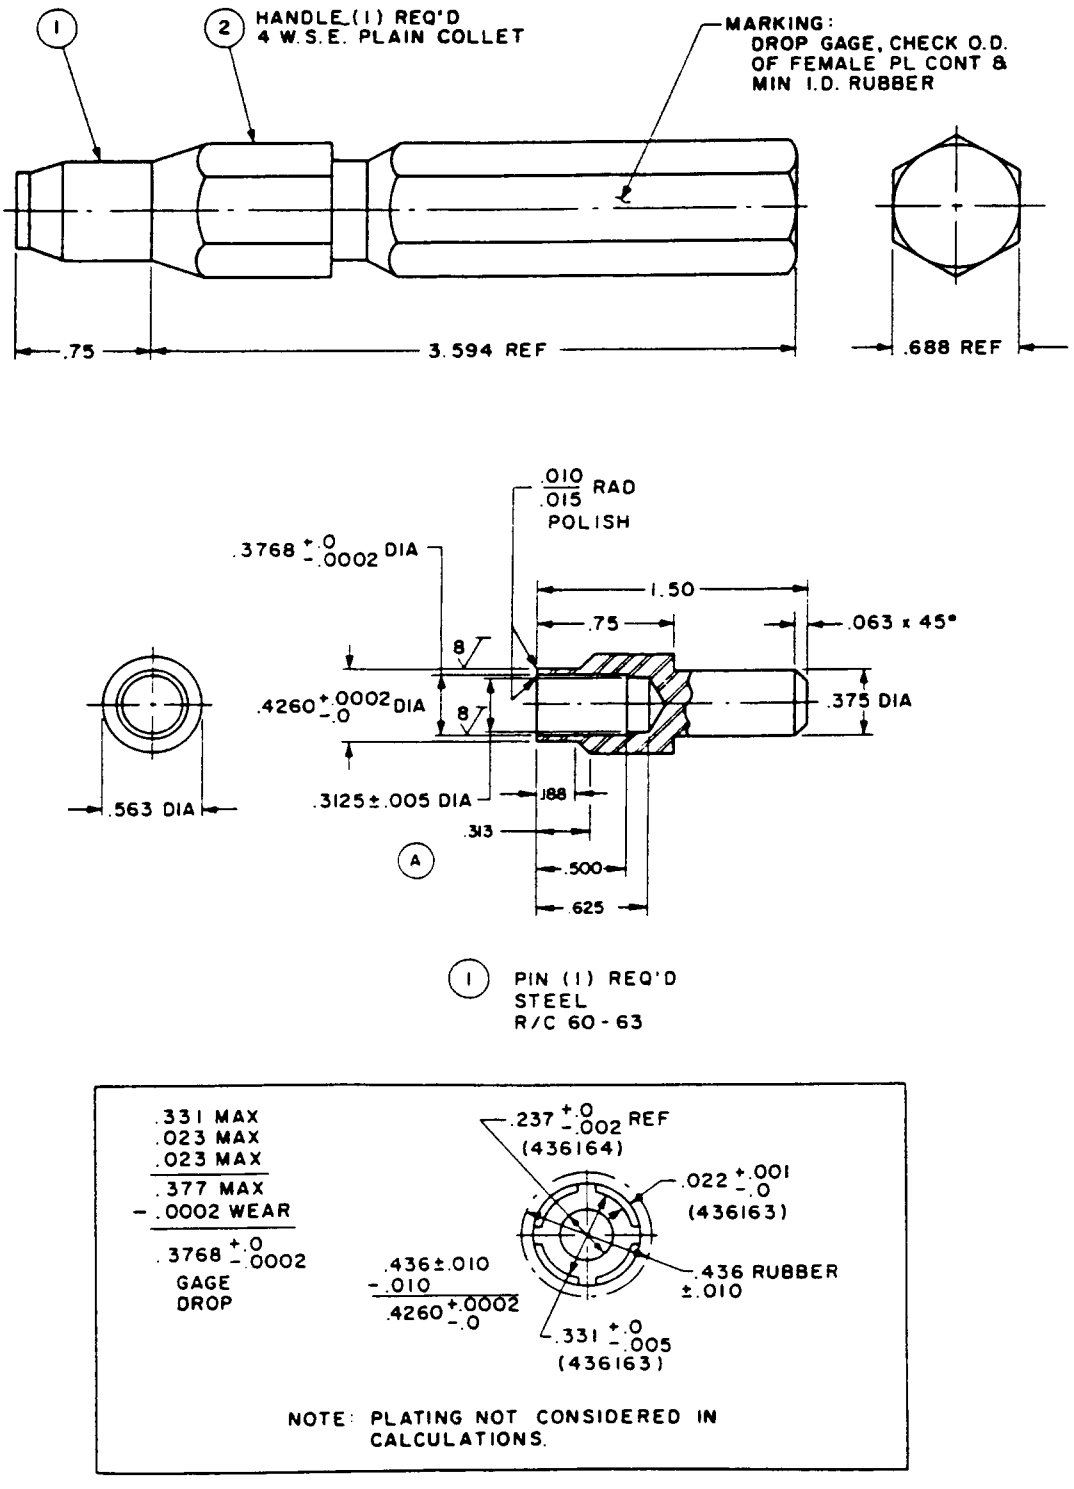


FIGURE 15. M22442/25-13 Drop gage to check OD of female pl contact & min ID rubber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

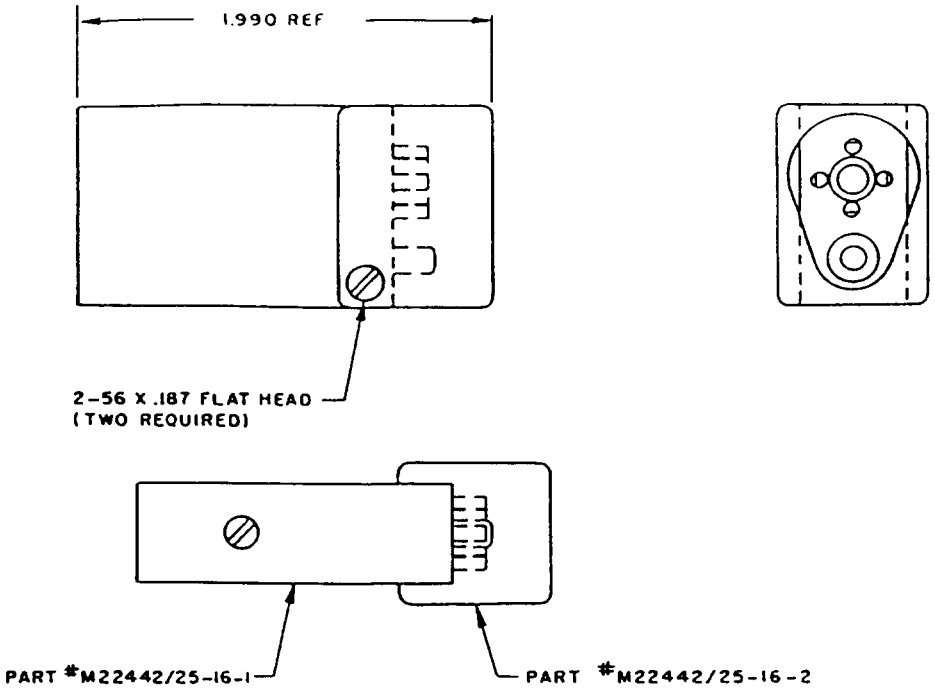

M22442/25-16 GAUGE ASSEMBLY


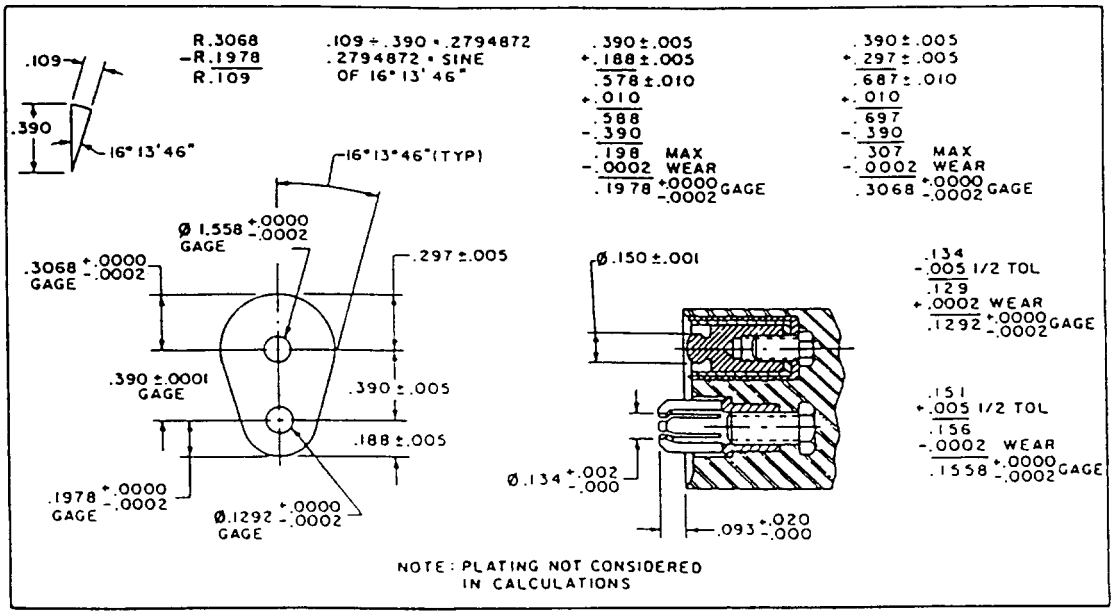


FIGURE 16. M22442/25-16 Gage to check cd of mld rbr conn nch cont assy.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

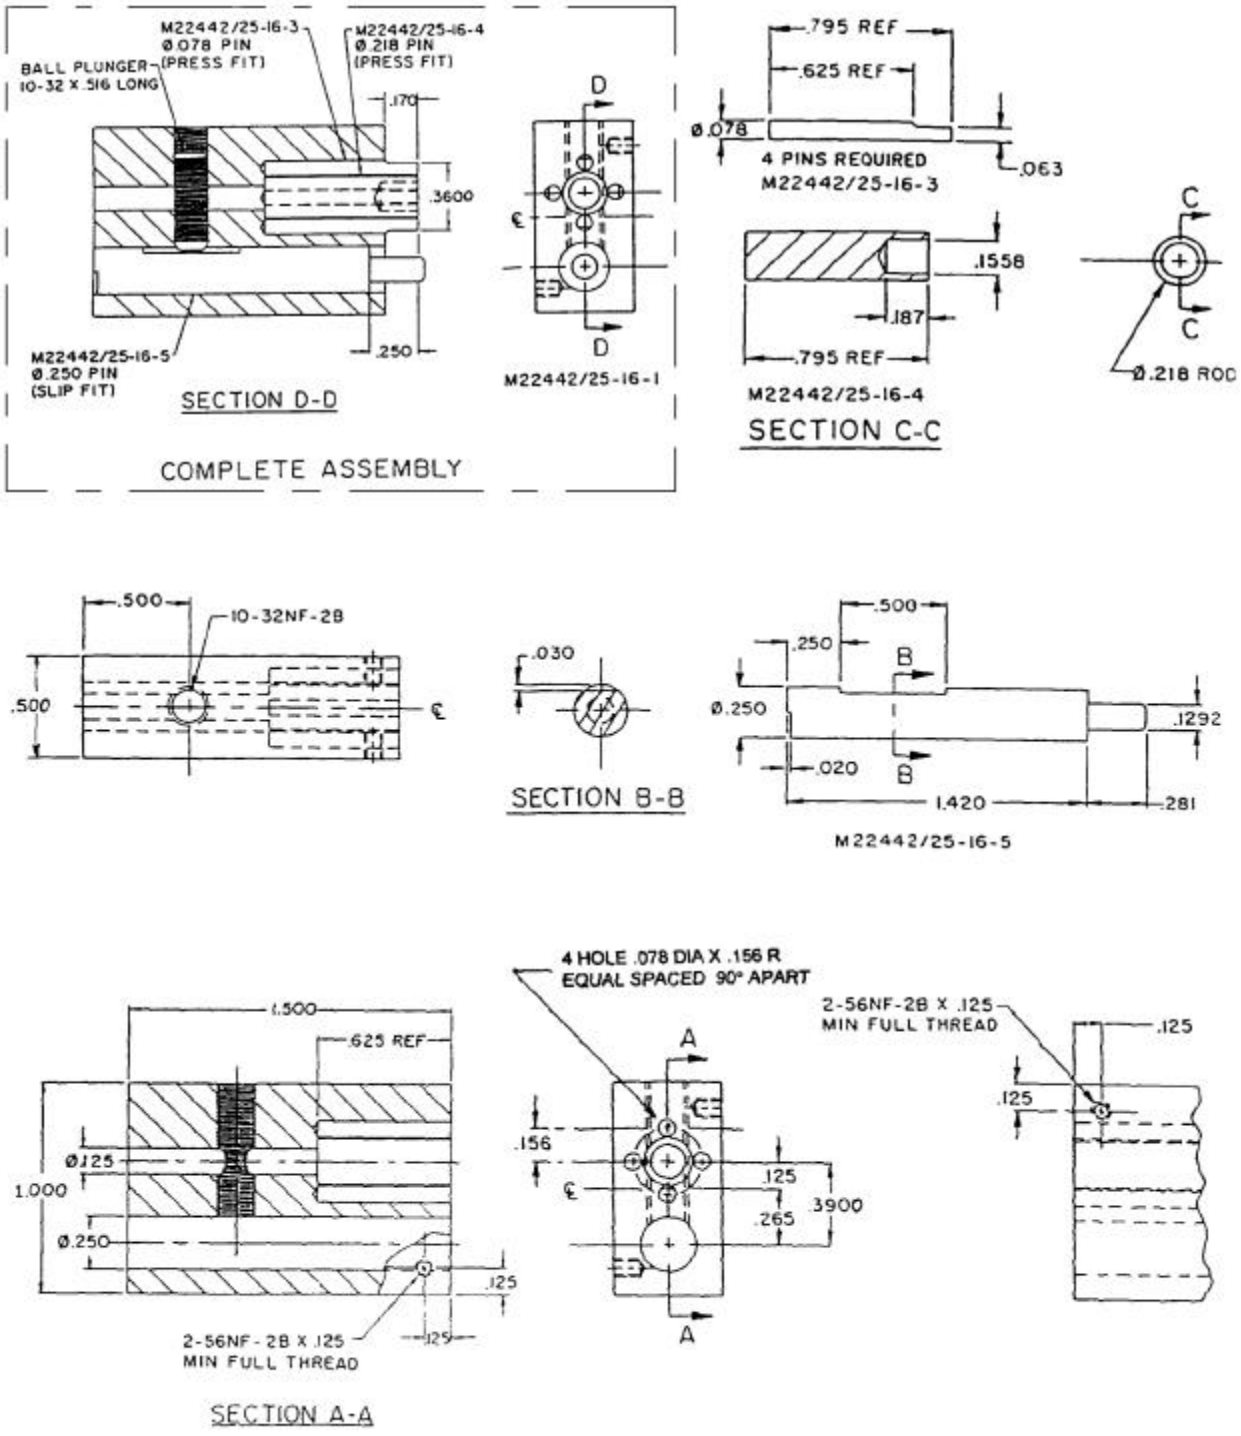

M22442/25-16-1

FIGURE 16. cont M22442/25-16 Gage to check cd of mld rbr conn nch cont assy.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

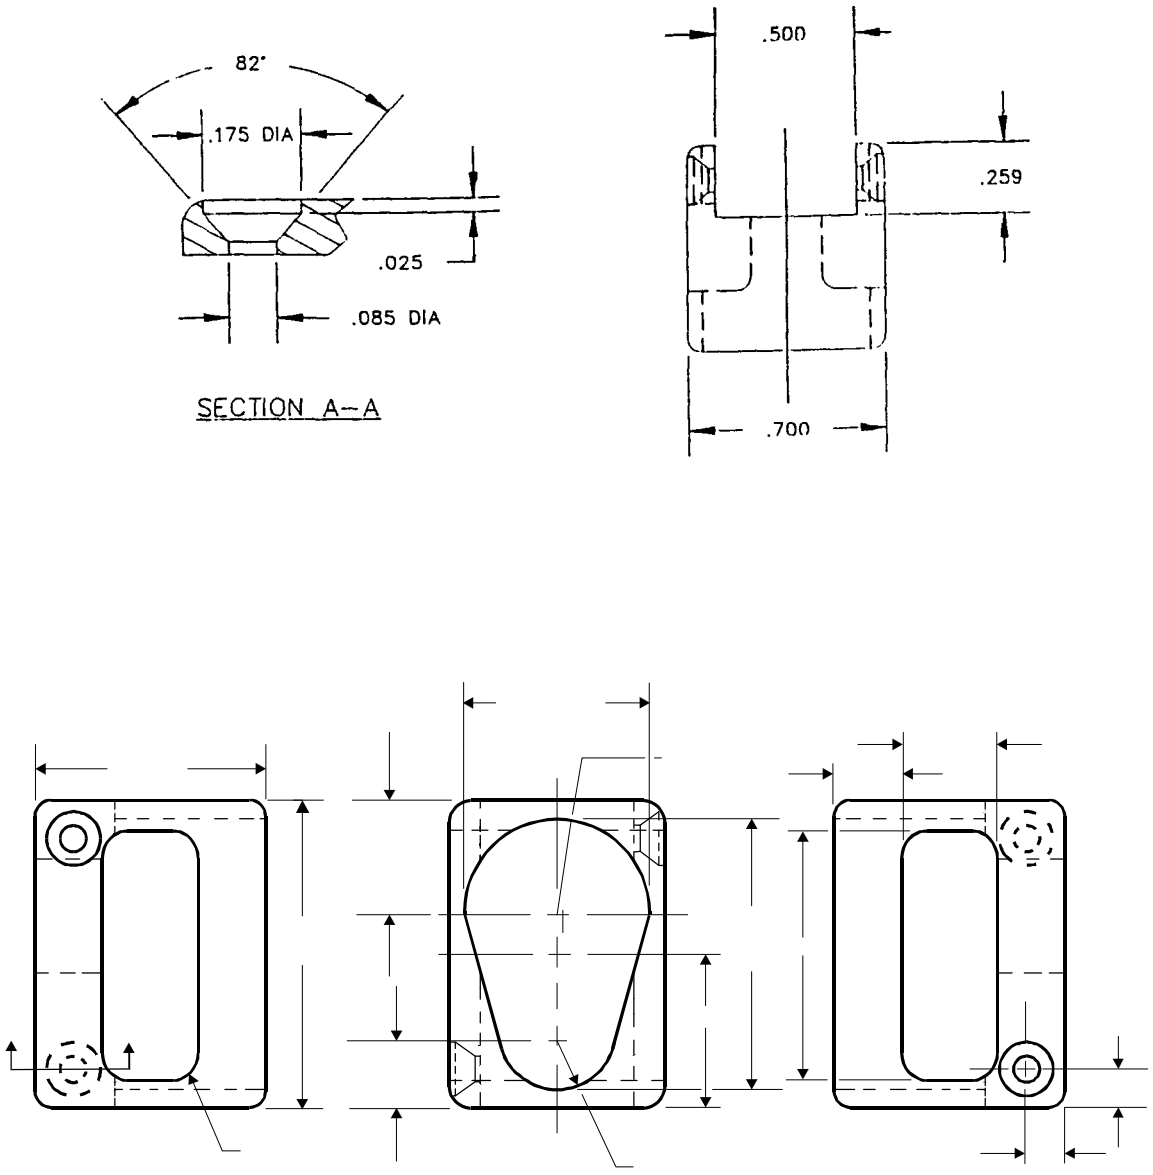

M22442/25-16-2

FIGURE 16. cont M22442/25-16 Gage to check cd of mld rbr conn nch cont assy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

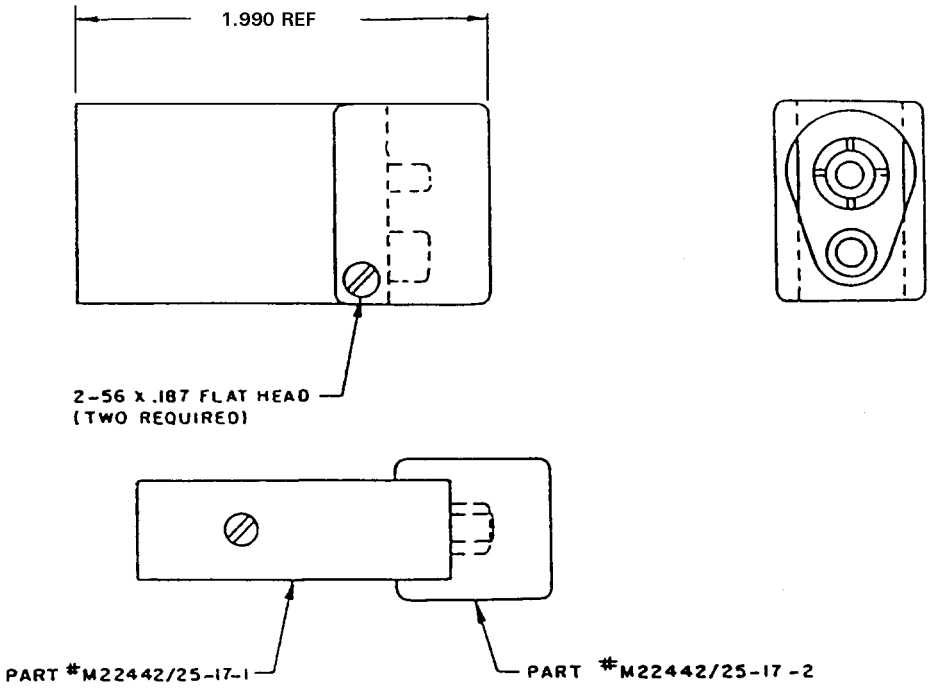

M22442/25-17 GAUGE ASSEMBLY


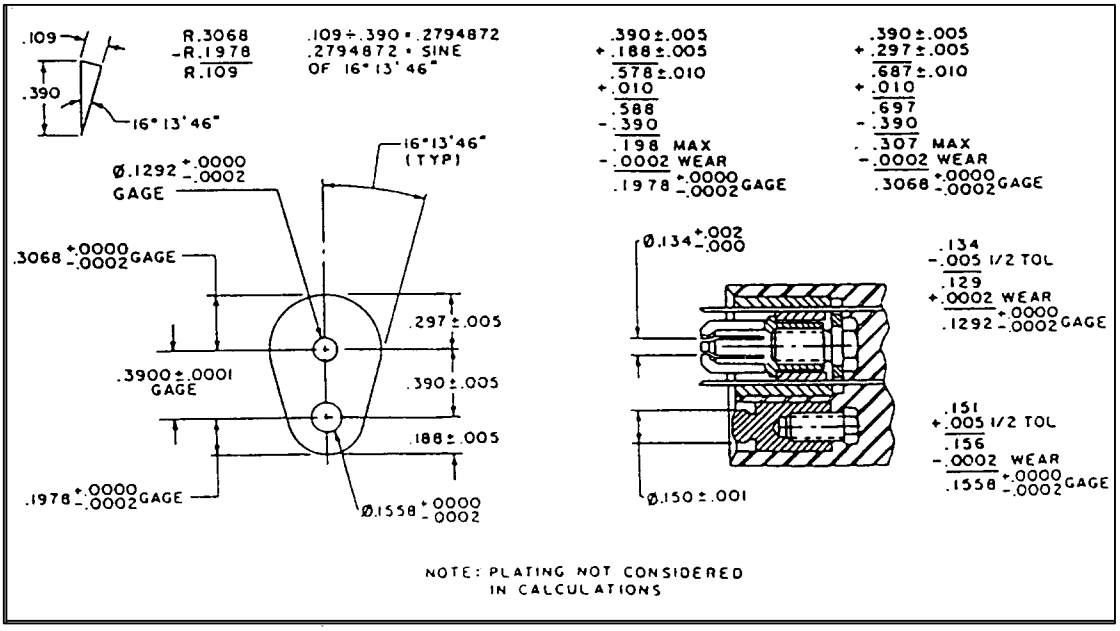


FIGURE 17. M22442/25-17 Gage to check cd of mld rbr conn sltd cont assy


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

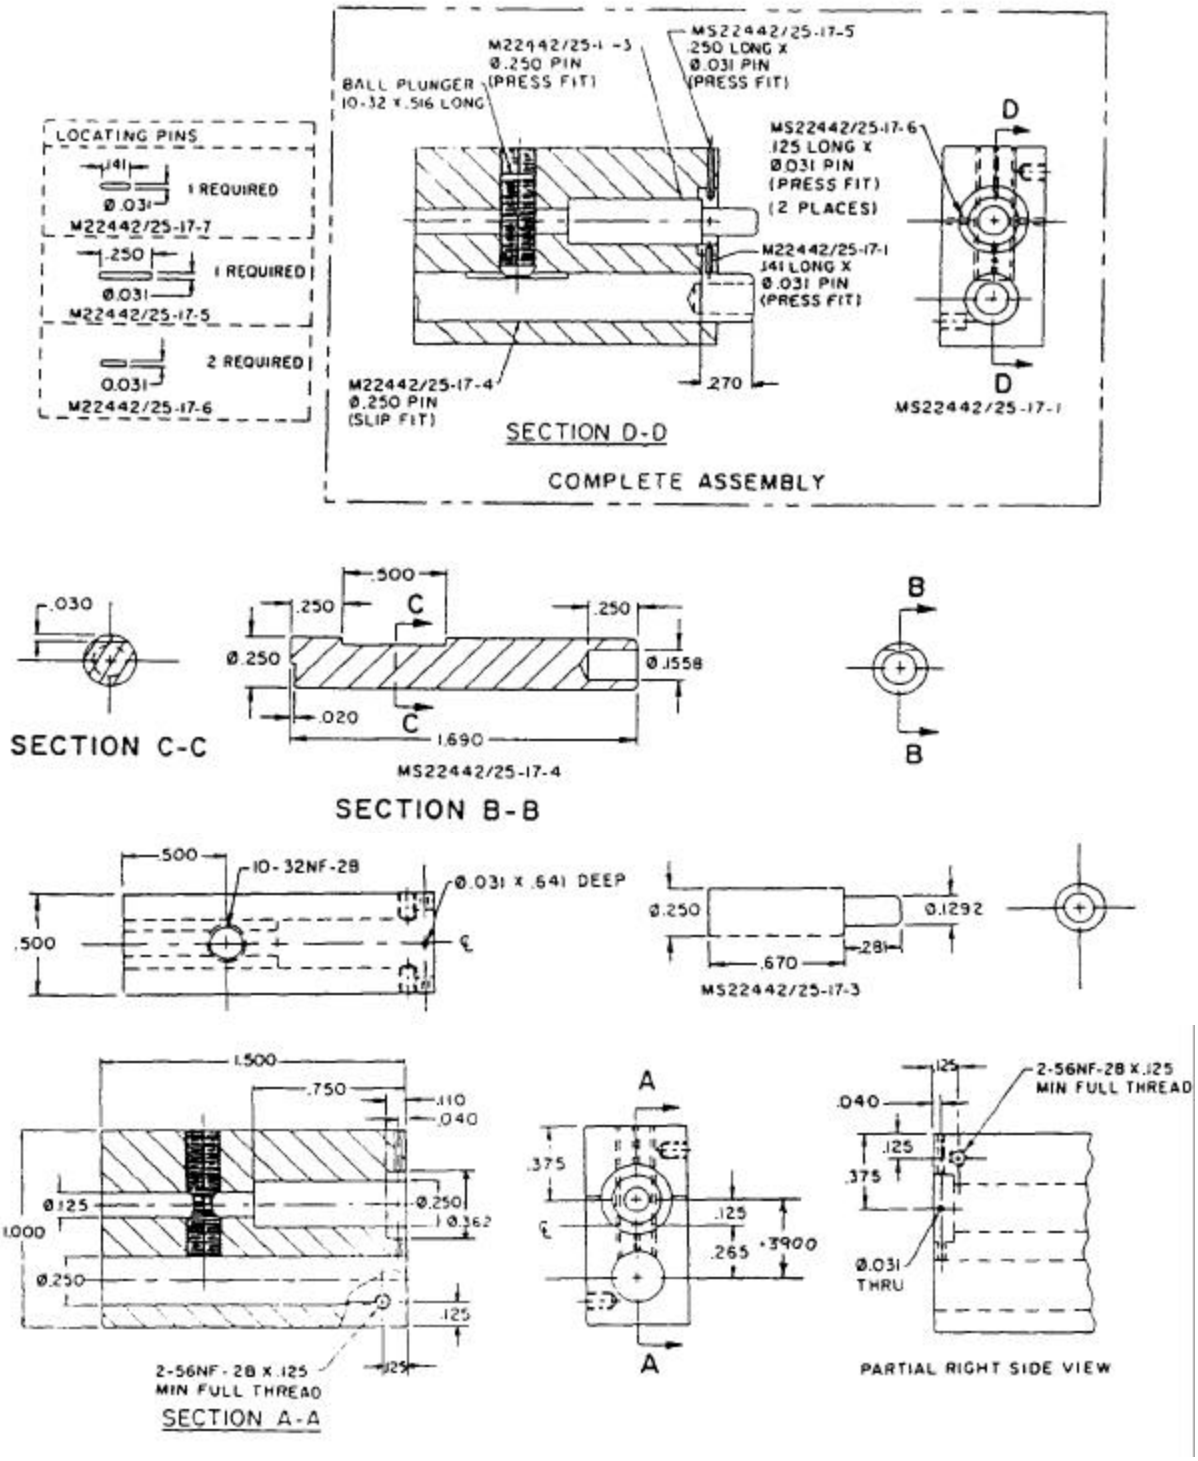

M22442/25-17-1

FIGURE 17. cont M22442/25-17 Gage to check cd of mld rbr conn sltd cont assy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

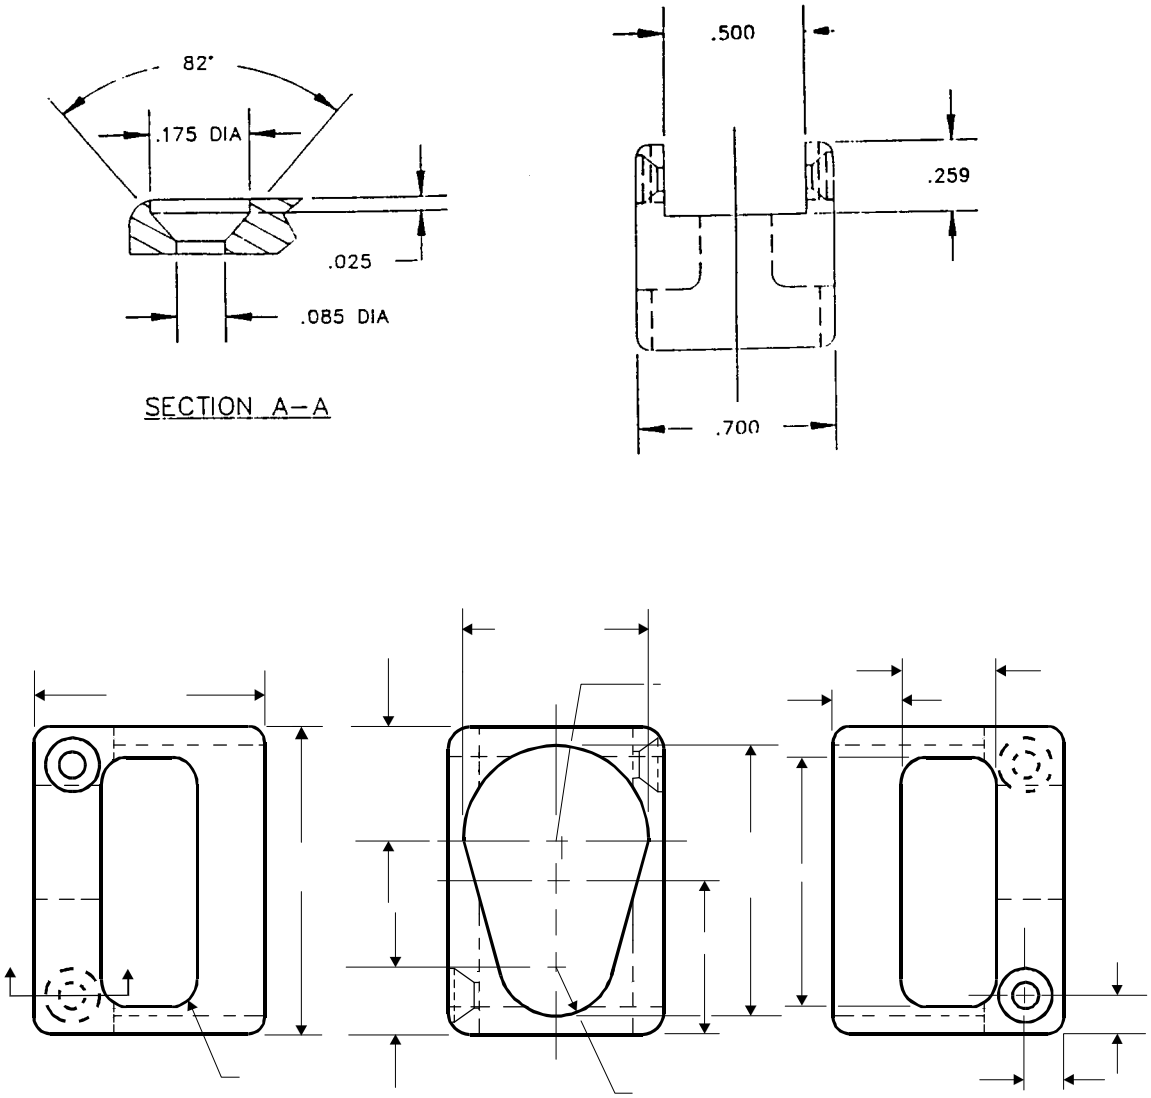

M22442/25-17-2

FIGURE 17. cont M22442/25-17 Gage to check cd of mld rbr conn sltd cont assy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.