MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

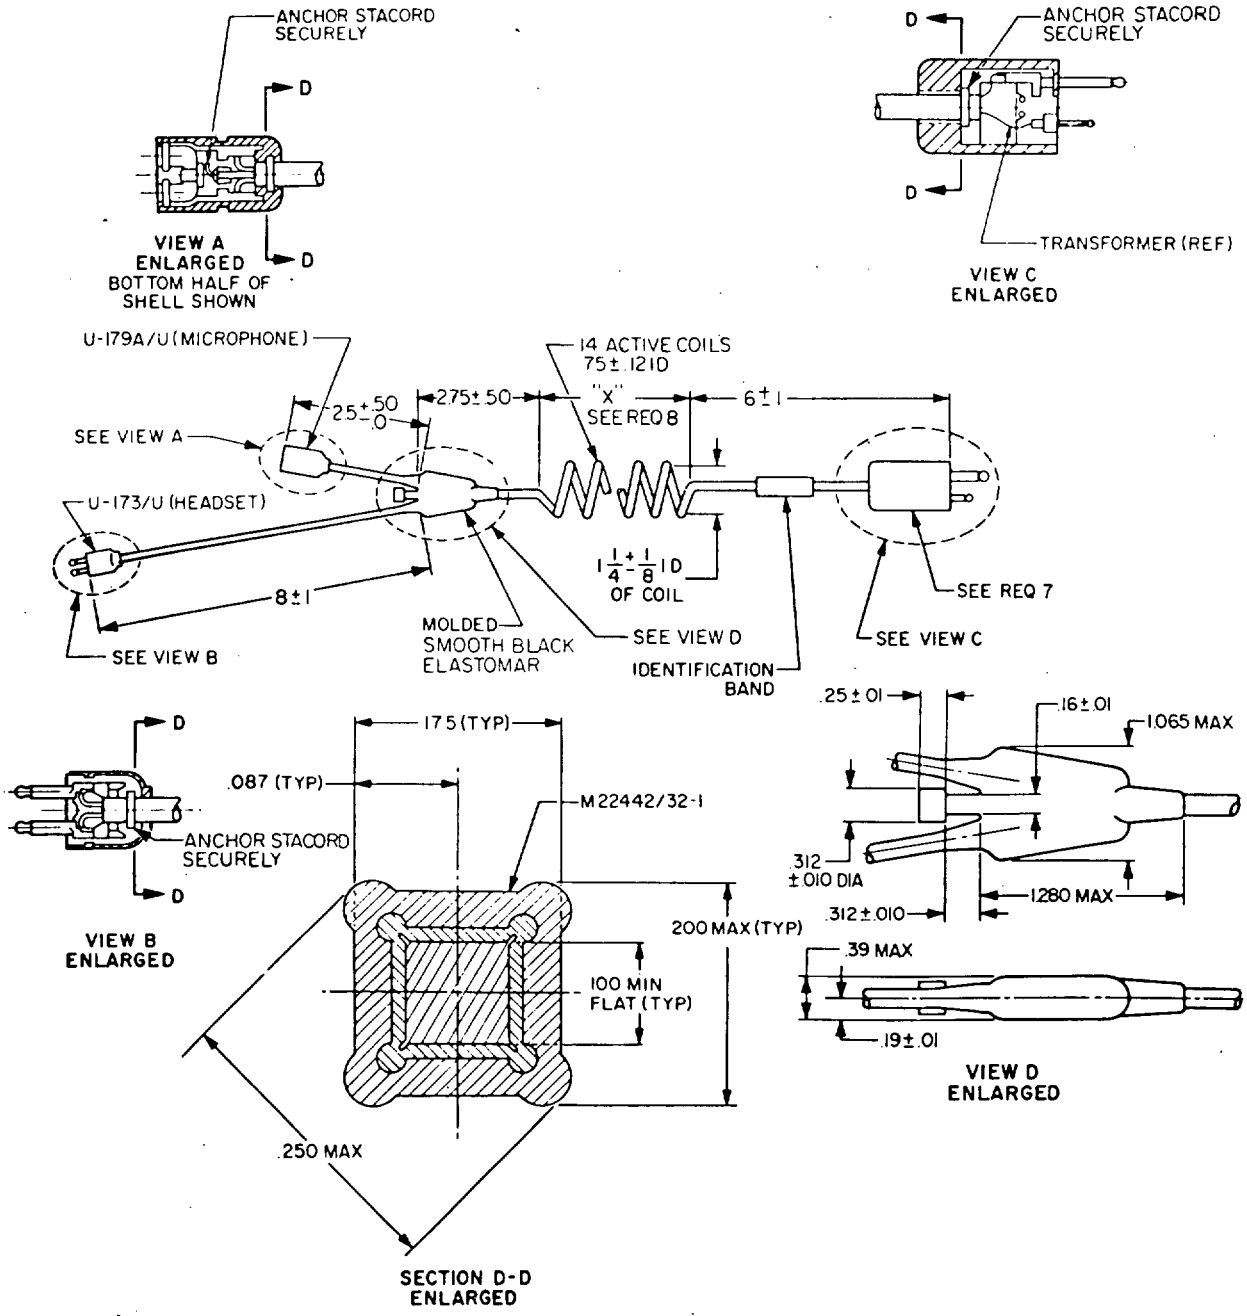



FIGURE 1. CABLE ASSEMBLY P/N M22442/26-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

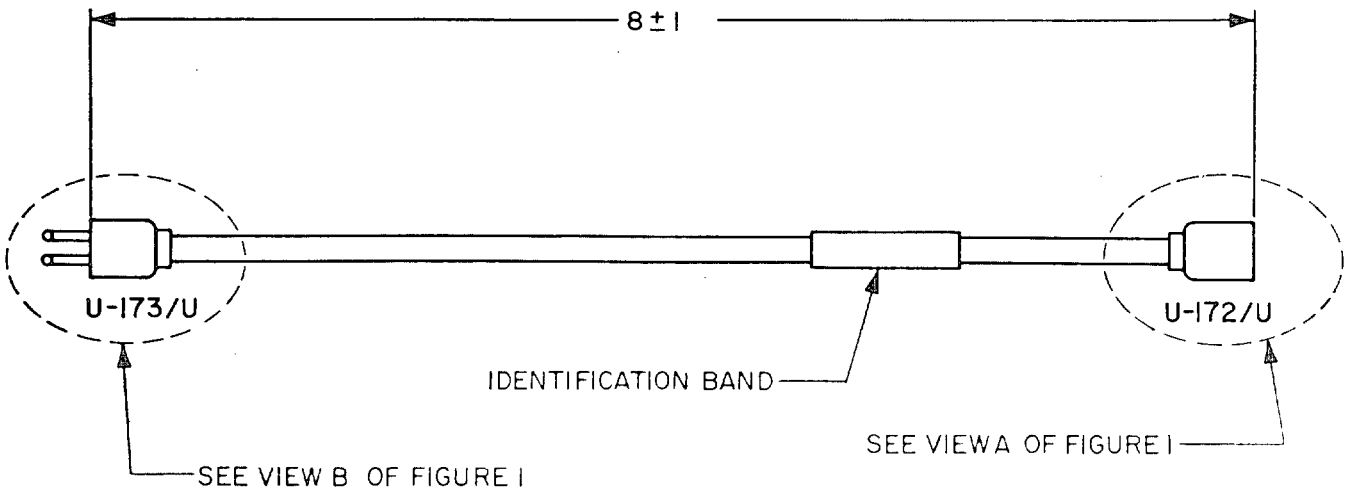



FIGURE 2 CABLE ASSEMBLY
P/N M22442/26-2

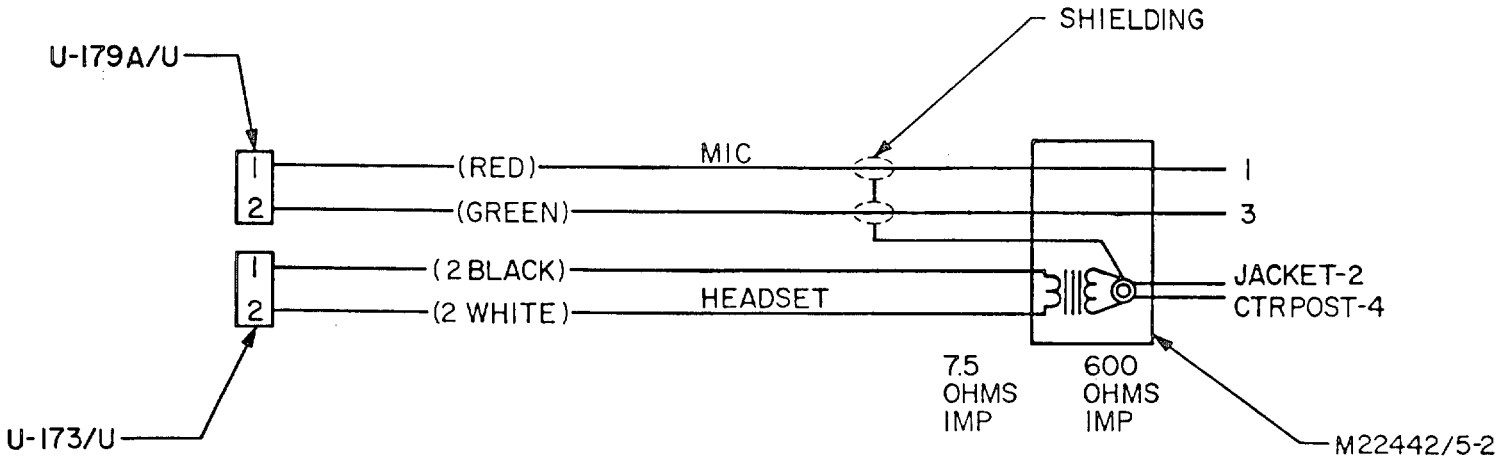



FIGURE 3 CABLE ASSEMBLY
P/N M22442/26-1
SCHEMATIC DIAGRAM



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.





FIGURE 4 CABLE ASSEMBLY P/N M22442/26-2
SCHEMATIC DIAGRAM

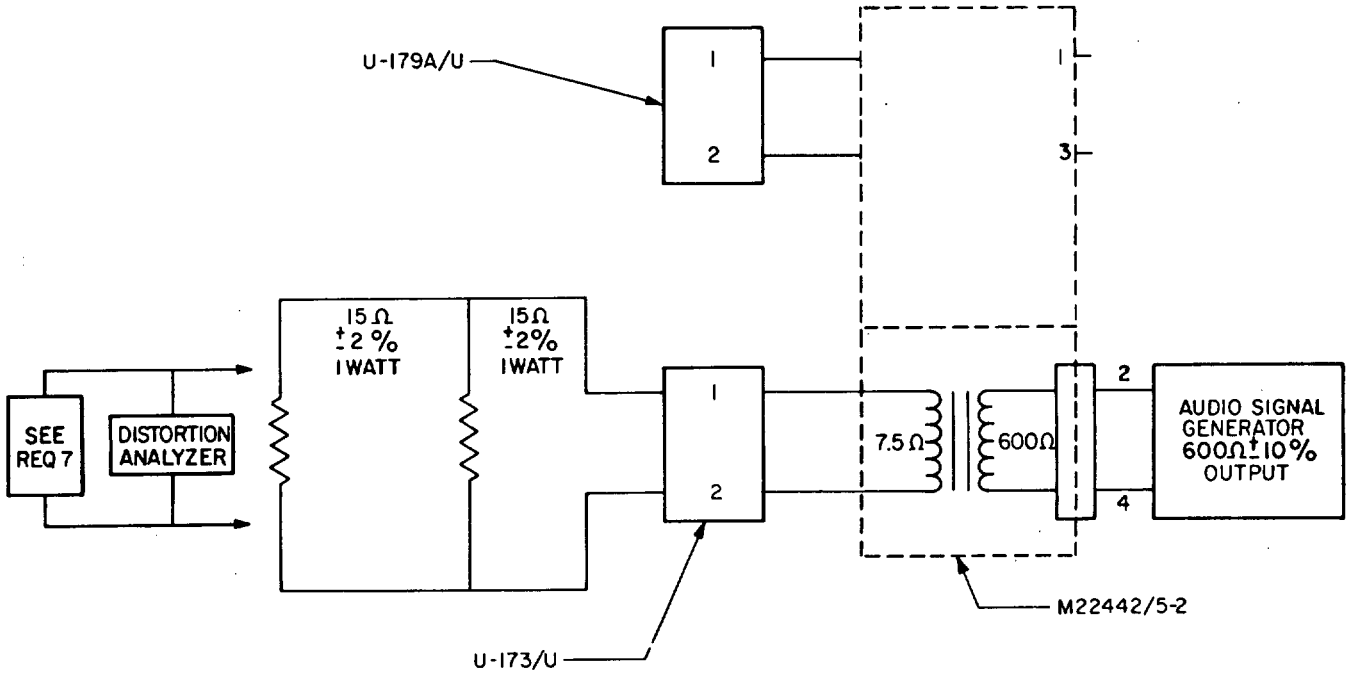



FIGURE 5 TEST CIRCUIT P/N M22442/26-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(A) 1. The M22442/26-3 cable assembly consists of one M22442/26-1 cable and one M22442/26-2 cable.

2. The cable (cord) for the M22442/26-1 cable assembly shall be in accordance with M22442/35-1. The cable (cord) for the M22442/26-2 cable assembly shall be in accordance with M22442/35-1 with the black and white conductors only.

3. The weight of the cable assembly shall not be greater than 6 oz.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance for P/N M22442/26-1 shall be as indicated when tested with a suitable ohmeter.

   (a) Contact 1 of U-179A/U and contact 1 of U-75/U less than 1 ohm.

   (b) Contact 2 of U-179A/U and contact 3 of U-75/U less than 1 ohm.

   (c) Contact 1 of U-173/U and contact 2 of U-173/U 1.8 $\pm$.2 ohms.

   (d) Contact 2 of U-75/U and contact 4 of U-75/U 73 $\pm$3 ohms.

6. The DC resistance for P/N M22442/26-2 shall be less than 1 ohm between the following contacts:

   (a) Contact 1 of U-173/U and contact 1 of U-172/U.

   (b) Contact 2 of U-173/U and contact 2 of U-172/U.

7. An electronic voltmeter with an input impedance greater than 1 megohm shall be used.

8. The connector shall be in accordance with M22442/5-2.

(A) 9. The M22442/5-2 connector shall meet the requirements of MIL-C-22442/5.

10. The "X" dimension shall be 42.25 $\pm$ .50 before coiling and 8.50 $\pm$ .50 after coiling.

11. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

(A) TABLE I. CX-13126/A cable assembly inspections.

| Inspection | Paragraph | | Group I | Group II | Group III |
|---|---|---|---|---|---|
| | Require-ments | Test | Qualifi-cation tests | Quality conformance inspection 100% | Sample testing per 4.5.1 |
| GROUP A (ALL SAMPLE UNITS) | | | | | |
| Visual & Mechanical Inspection | 3.1,3.4, 3.6 | 4.6.2 | X | X | |
| Soldering | 3.4.24 | 4.6.2.1 | X | X | |
| Dielectric Withstanding Voltage | 3.5.5 | 4.6.7 | X | X | |
| Insulation Resistance | 3.5.4 | 4.6.6 | X | X | |
| Pull Test | 3.5.7 | 4.6.9 | X | | X |
| DC Resistance | 3.5.2 | 4.6.4 | X | X | |
| GROUP B (4 SAMPLES) | | | | | |
| Low Temperature Flexibility | 3.5.11 | 4.6.13 | X | | X |
| Bend Relief Flexibility | 3.5.10 | 4.6.12 | X | | X |
| GROUP C (2 SAMPLES) | | | | | |
| Ozone Resistance | 3.5.14 | 4.6.16 | X | | X |
| Durability | 3.5.13 | 4.6.15 | X | | X |
| Durometer Hardness | 3.5.16 | 4.6.18 | X | | X |
| GROUP D (3 SAMPLES) | | | | | |
| Impedance | 3.5.1 | 4.6.3 | X | | X |
| Frequency Response | 3.5.20 | 4.6.21 | X | X | |
| Linearity | 3.5.21 | 4.6.21 | X | | X |
| Distortion | 3.5.22 | 4.6.21 | X | | X |
| Power Loss | | | X | | X |
| GROUP E (4 SAMPLES) | | | | | |
| Temperature-Altitude | 3.6.1 | 4.7 | X | | |
| Salt Fog | 3.6.1 | 4.7 | X | | |
| Thermal Shock | 3.5.9 | 4.6.11 | X | | |
| Vibration | 3.6.1 | 4.7 | X | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.25 inch unless otherwise specified.
3. This specification supersedes Naval Air Systems Command Drawing 765AS285.

Preparing Activity:
Navy - AS
Project No. 5995-N186-1



Source: https://assist.dla.mil Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE*: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering & Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering & Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions - Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-22442/26A(AS) | CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* - Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* - Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* - Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.