MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

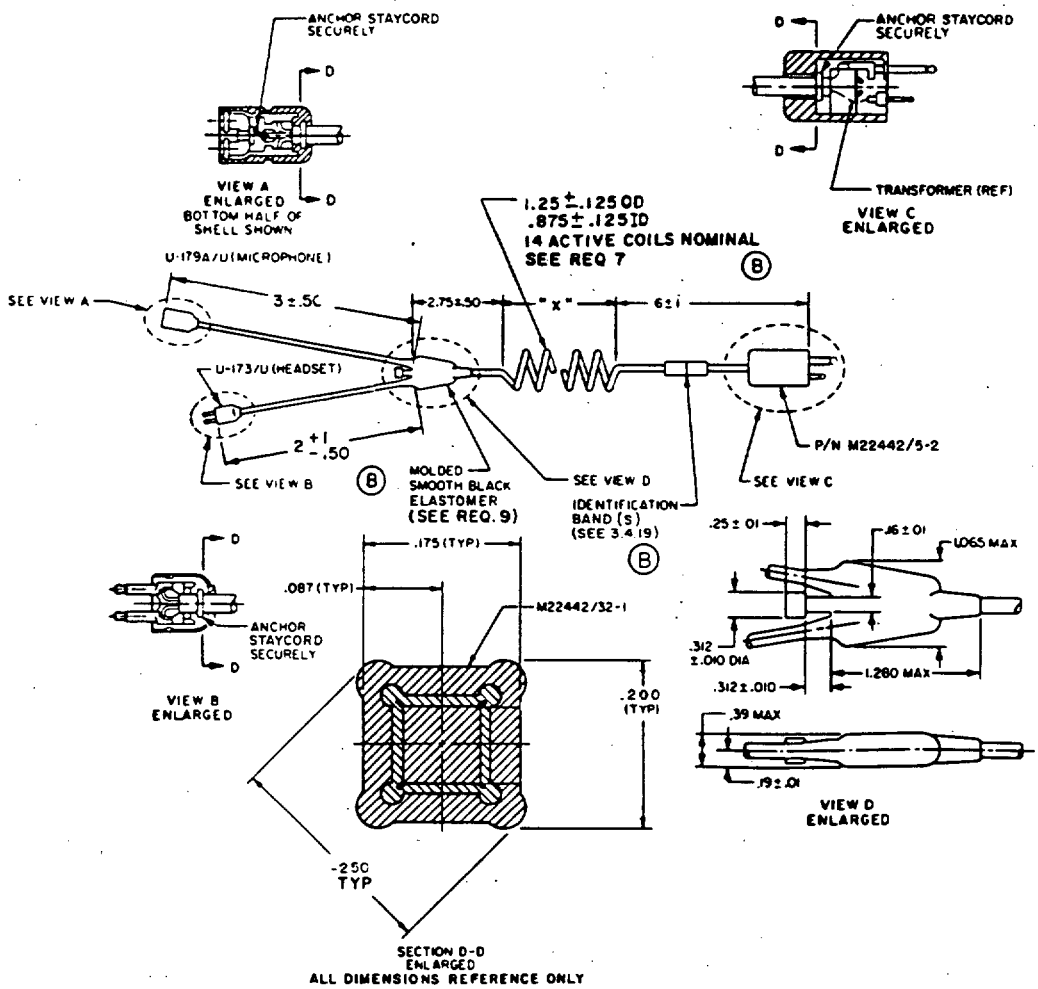


FIGURE 1. Cable assembly P/N M22442/26-1 (see Requirement 1).

AMSC N/A
FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

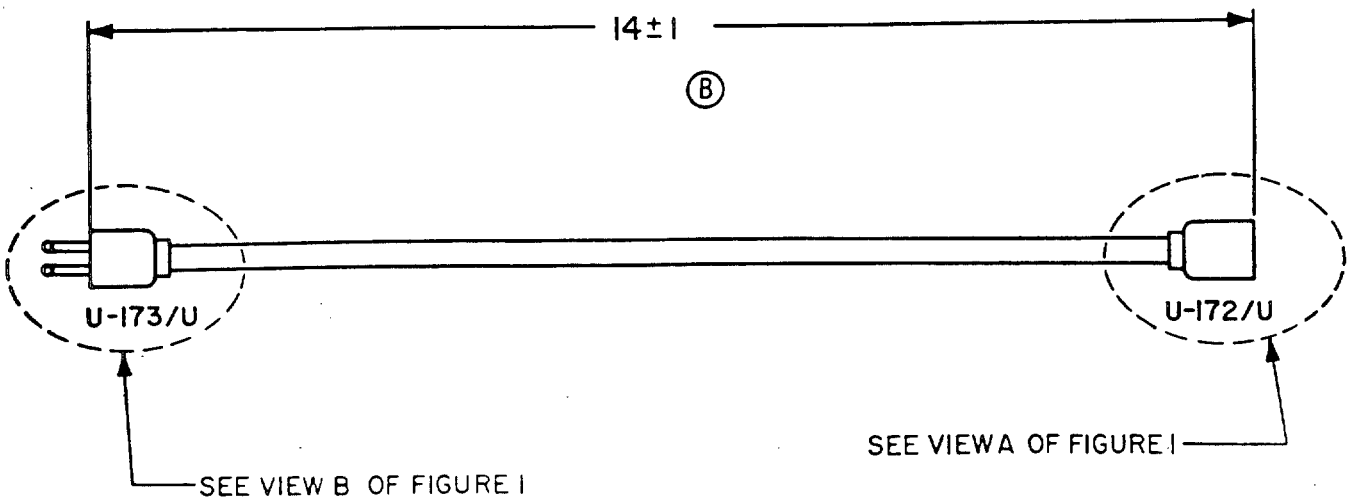


FIGURE 2. Cable assembly headset extension P/N M22442/26-2 (see Requirement 1).

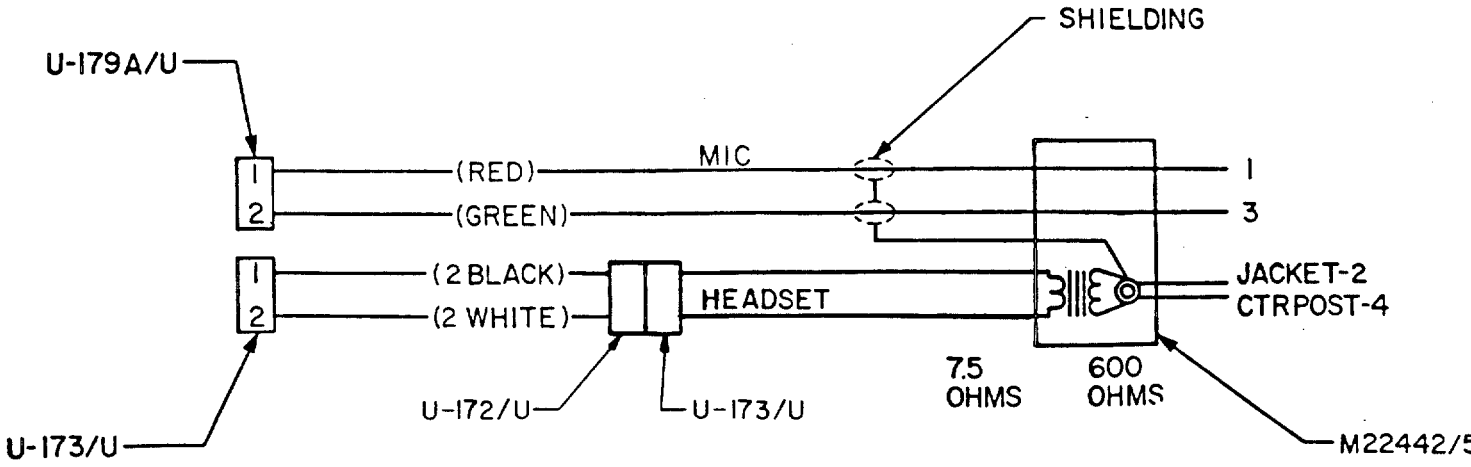


FIGURE 3. Cable assembly P/N M22442/26-3 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.




FIGURE 4. Cable assembly P/N M22442/26-2 schematic diagram.

APPLICABLE DOCUMENTS:

MIL-R-6855 Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes

REQUIREMENTS:

1. The M22442/26-3 cable assembly consists of one M22442/26-1 cable and one M22442/26-2 cable.

2. The cable (cord) for the M22442/26-1 cable assembly shall be in accordance with M22442/35-1. The cable (cord) for the M22442/26-2 cable assembly shall be in accordance with M22442/35-2 with the black and white conductors only. The electrostatic and electromagnetic isolation requirements of M22442/35-1 and -2 are not required.

3. The weight of the cable assembly shall not be greater than 6 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance for P/N M22442/26-1 shall be as indicated when tested with a suitable ohmmeter.

(B) (a) Contact 1 of U-179A/U and contact 1 of P/N M22442/5-2 less than 2 ohms.

(B) (b) Contact 2 of U-179A/U and contact 3 of P/N M22442/5-2 less than 2 ohms.

(B) (c) Contact 1 of U-173/U and contact 2 of U-173/U less than 10 ohms.

(B) (d) Contact 2 of P/N M22442/5-2 and contact 4 of P/N M22442/5-2 less than 100 ohms.

(B) 6. The DC resistance for P/N M22442/26-2 shall be less than 2 ohms between the following contacts when tested with a suitable ohmmeter.

(a) Contact 1 of U-173/U and contact 1 of U-172/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

(b) Contact 2 of U-173/U and contact 2 of U-172/U.

(B) 7. The "X" dimension shall be 42.25 +3 -.5 before coiling.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. Molded Smooth Black Elastomer shall be in accordance with MIL-R-6855, Class H, Type A, GR 60.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Naval Air Systems Command Drawing 765AS285.

Preparing Activity:
Navy - AS
Project No. 5995-N120-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

(B) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-22442/26B(AS)	CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 53
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 53
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.