INCH-POUND

MIL-C-22442/26C(AS)
26 May 1989
SUPERSEDING
MIL-C-22442/26B(AS)
14 November 1988

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

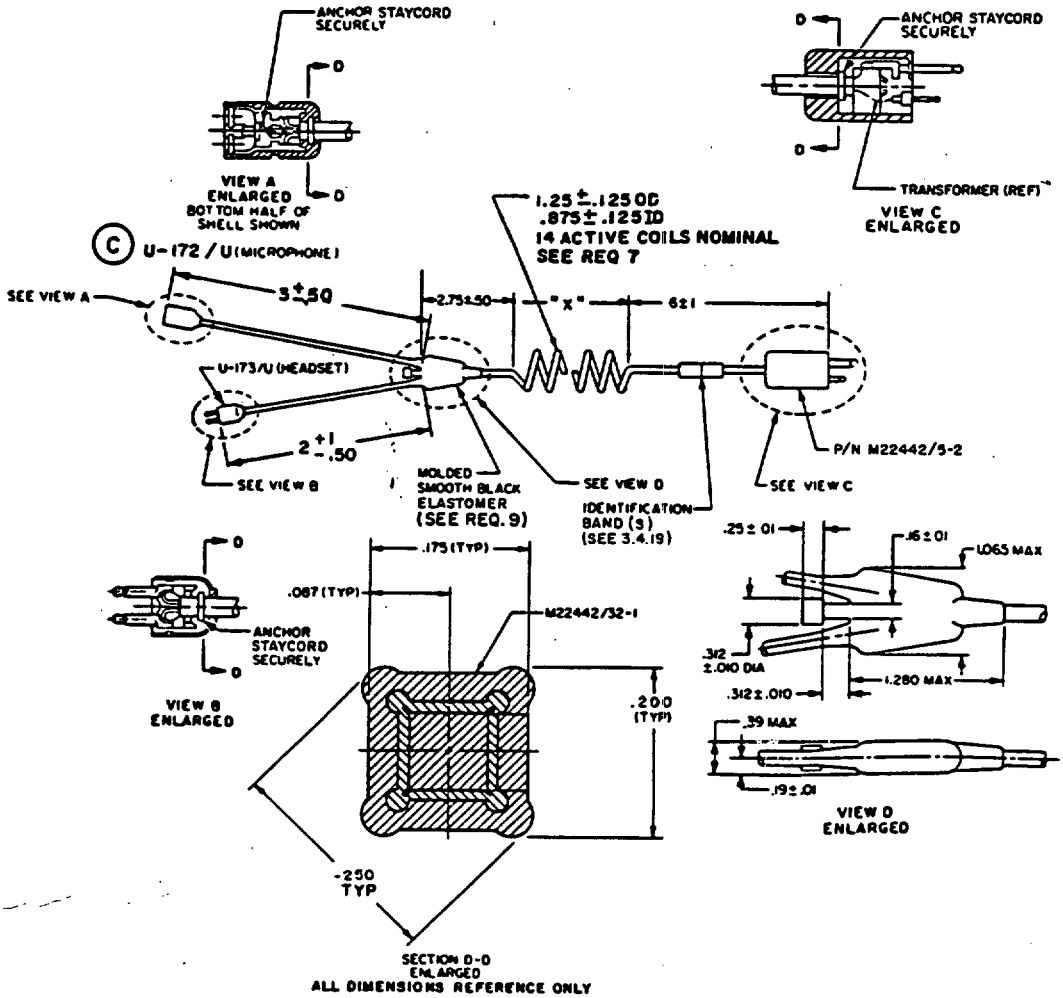


FIGURE 1. Cable assembly P/N M22442/26-1 (see Requirement 1).

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

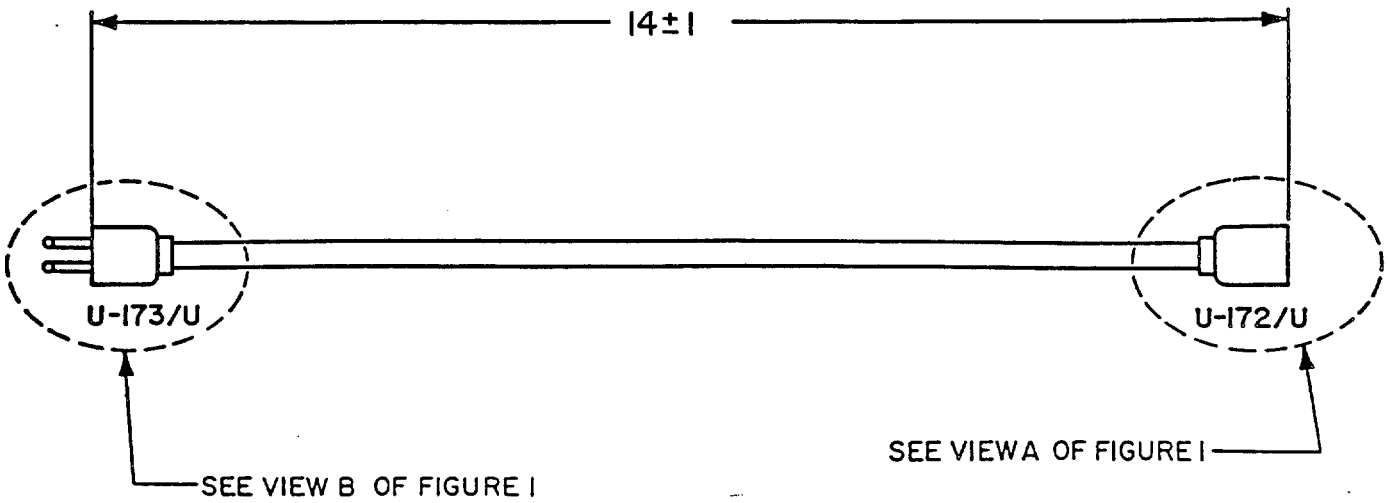


FIGURE 2. Cable assembly headset extension P/N M22442/26-2 (see Requirement 1).

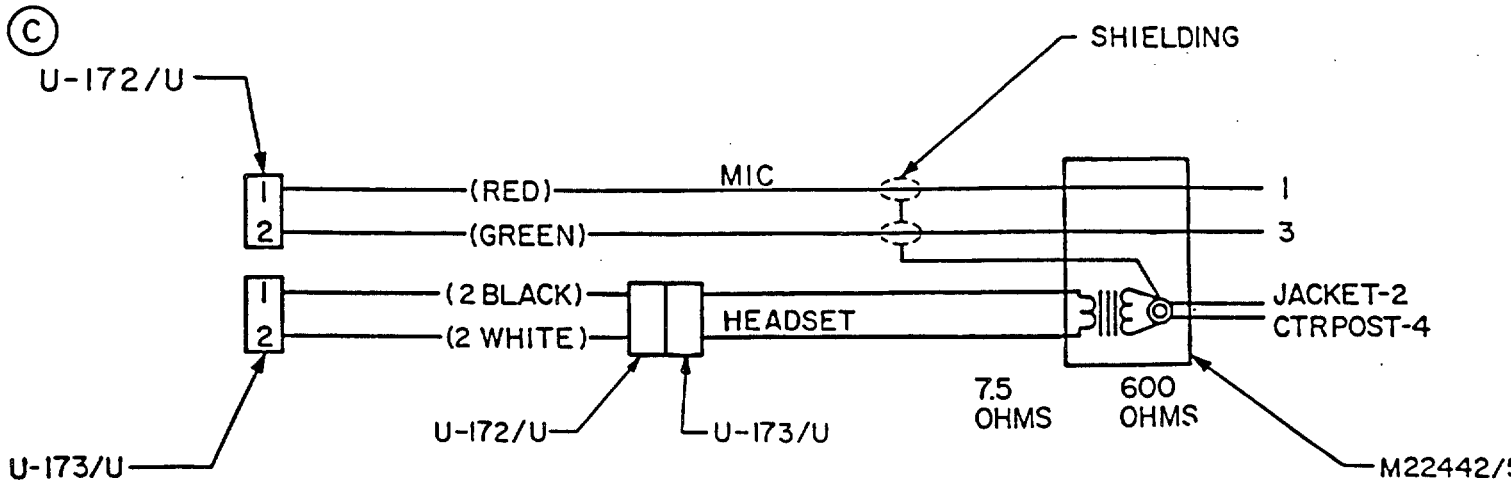


FIGURE 3. Cable assembly P/N M22442/26-3 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

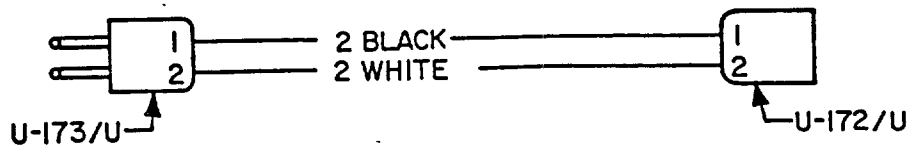


FIGURE 4. Cable assembly P/N M22442/26-2 schematic diagram.

APPLICABLE DOCUMENTS:

MIL-R-6855 Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes

REQUIREMENTS:

1. The M22442/26-3 cable assembly consists of one M22442/26-1 cable and one M22442/26-2 cable.

2. The cable (cord) for the M22442/26-1 cable assembly shall be in accordance with M22442/35-1. The cable (cord) for the M22442/26-2 cable assembly shall be in accordance with M22442/35-2 with the black and white conductors only. The electrostatic and electromagnetic isolation requirements of M22442/35-1 and -2 are not required.

3. The weight of the cable assembly shall not be greater than 6 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance for P/N M22442/26-1 shall be as indicated when tested with a suitable ohmmeter.

(C) (a) Contact 1 of U-172/U and contact 1 of P/N M22442/5-2 less than 2 ohms.

(C) (b) Contact 2 of U-172/U and contact 3 of P/N M22442/5-2 less than 2 ohms.

(c) Contact 1 of U-173/U and contact 2 of U-173/U less than 10 ohms.

(d) Contact 2 of P/N M22442/5-2 and contact 4 of P/N M22442/5-2 less than 100 ohms.

6. The DC resistance for P/N M22442/26-2 shall be less than 2 ohms between the following contacts when tested with a suitable ohmmeter.

(a) Contact 1 of U-173/U and contact 1 of U-172/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

(b) Contact 2 of U-173/U and contact 2 of U-172/U.

7. The "X" dimension shall be 42.25 +3 -.5 before coiling.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. Molded Smooth Black Elastomer shall be in accordance with MIL-R-6855, Class II, Type A, GR 60.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Naval Air Systems Command Drawing 765AS285.

Preparing Activity:
Navy - AS
Project No. 5995-N128

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.