INCH-POUND

MIL-C-22442/26D(AS)
18 February 1992
SUPERSEDING
MIL-C-22442/26C(AS)
26 May 1989

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13126A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22442.

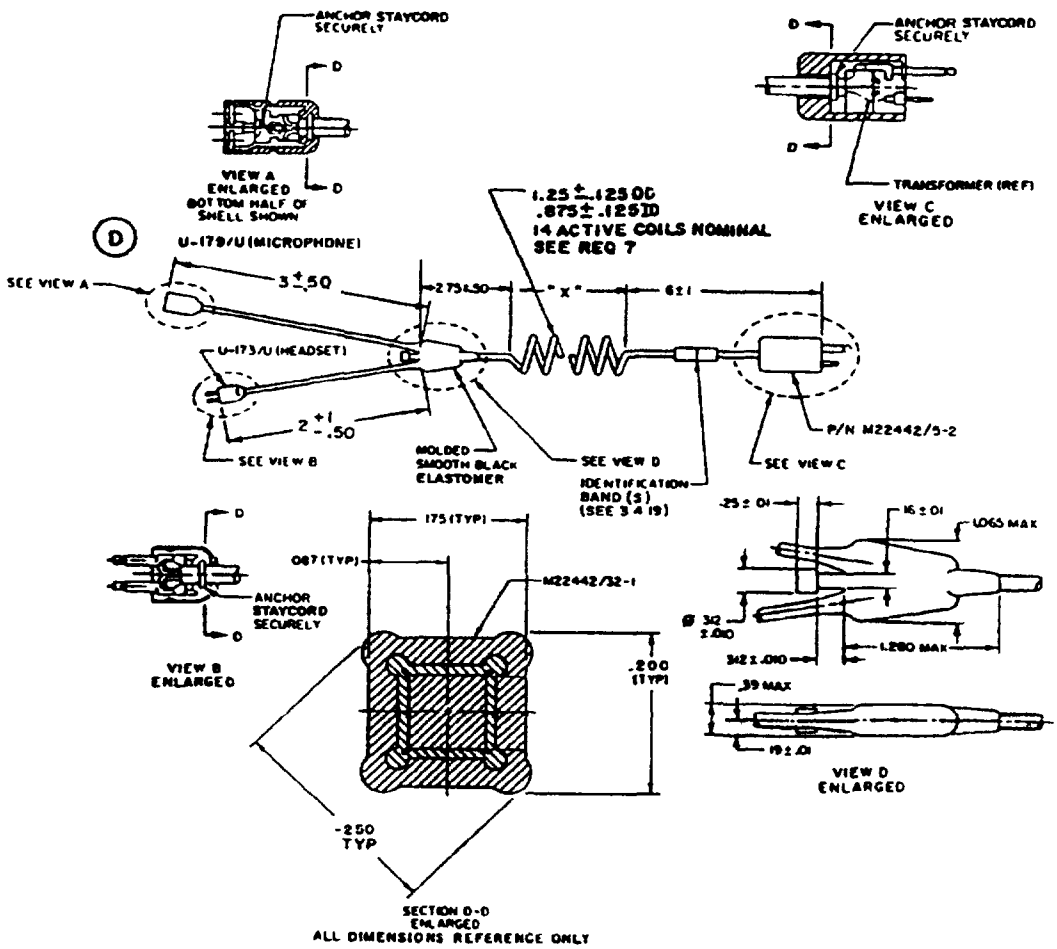


FIGURE 1. Cable assembly P/N M22442/26-1 (see Requirement 1).

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

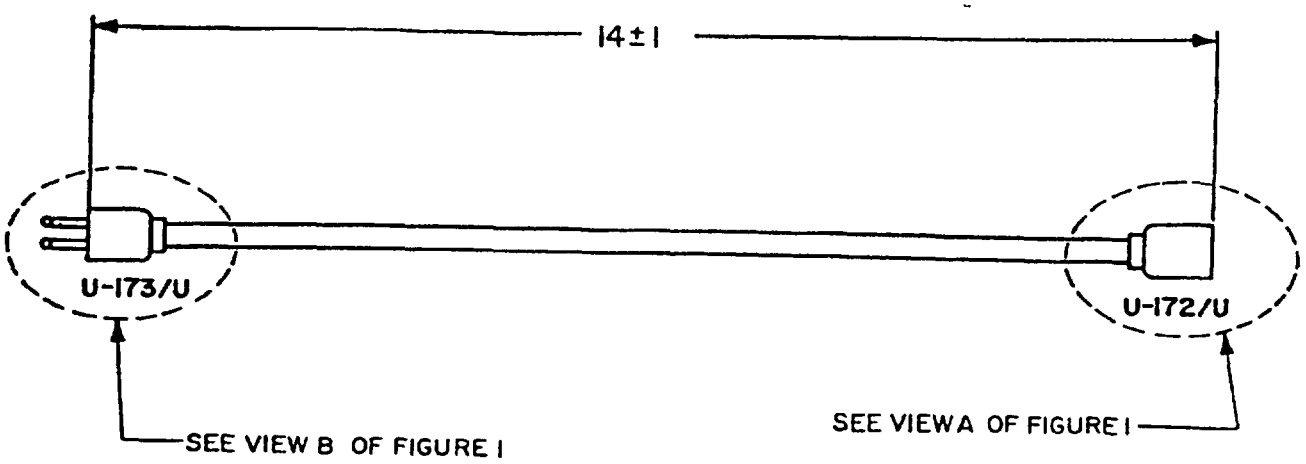


FIGURE 2. Cable assembly headset extension P/N M22442/26-2 (see Requirement 1).

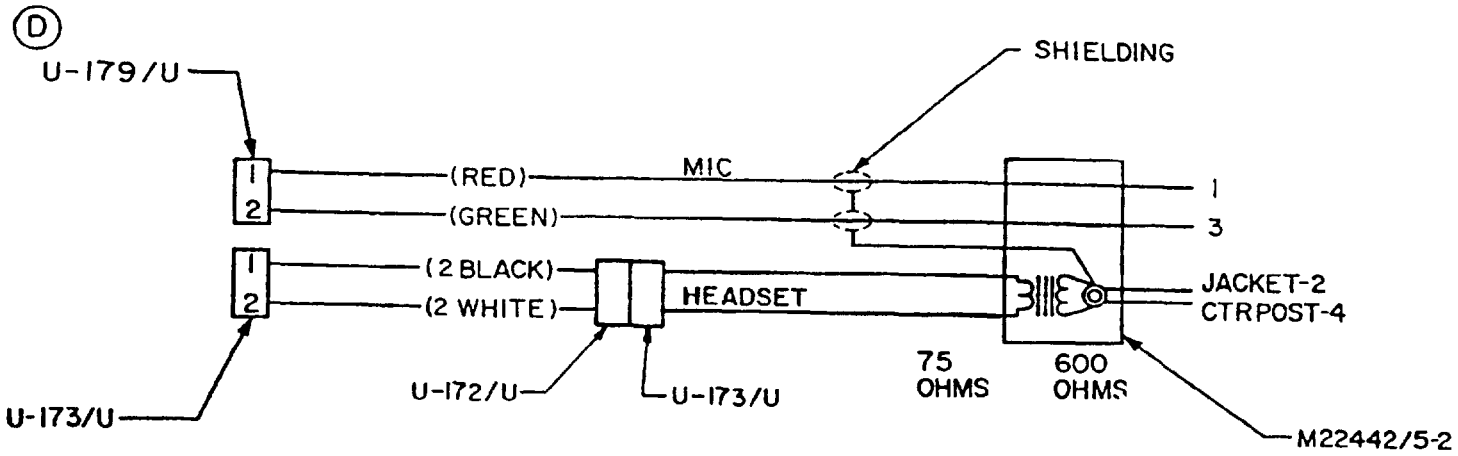


FIGURE 3. Cable assembly P/N M22442/26-3 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.



FIGURE 4. Cable assembly P/N M22442/26-2 schematic diagram.

REQUIREMENTS:

1. The M22442/26-3 cable assembly consists of one M22442/26-1 cable and one M22442/26-2 cable.

2. The cable (cord) for the M22442/26-1 cable assembly shall be in accordance with M22442/35-1. The cable (cord) for the M22442/26-2 cable assembly shall be in accordance with M22442/35-2 with the black and white conductors only. The electrostatic and electromagnetic isolation requirements of M22442/35-1 and -2 are not required.

3. The weight of the cable assembly shall not be greater than 6 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance for P/N M22442/26-1 shall be as indicated when tested with a suitable ohmmeter.

(D) (a) Contact 1 of U-179/U and contact 1 of P/N M22442/5-2 less than 2 ohms.

(D) (b) Contact 2 of U-179/U and contact 3 of P/N M22442/5-2 less than 2 ohms.

(c) Contact 1 of U-173/U and contact 2 of U-173/U less than 10 ohms.

(d) Contact 2 of P/N M22442/5-2 and contact 4 of P/N M22442/5-2 less than 100 ohms.

6. The DC resistance for P/N M22442/26-2 shall be less than 2 ohms between the following contacts when tested with a suitable ohmmeter.

(a) Contact 1 of U-173/U and contact 1 of U-172/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

(b) Contact 2 of U-173/U and contact 2 of U-172/U.

7. The "X" dimension shall be 42.25 +3 -.5 before coiling.

8. The cable assembly shall be tested in accordance with the applicable tests listed in table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification sheet supersedes Naval Air Systems Command Drawing 765AS285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for QPL retention (see 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I. - Continued.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see 4.4.4).

Preparing activity:
Navy - AS

Project 5995-N135-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.