
INCH-POUND
MIL-DTL-22442/26E(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/26D(AS)
18 February 1992

DETAIL SPECIFICATION SHEET

# CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-l 3126A/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

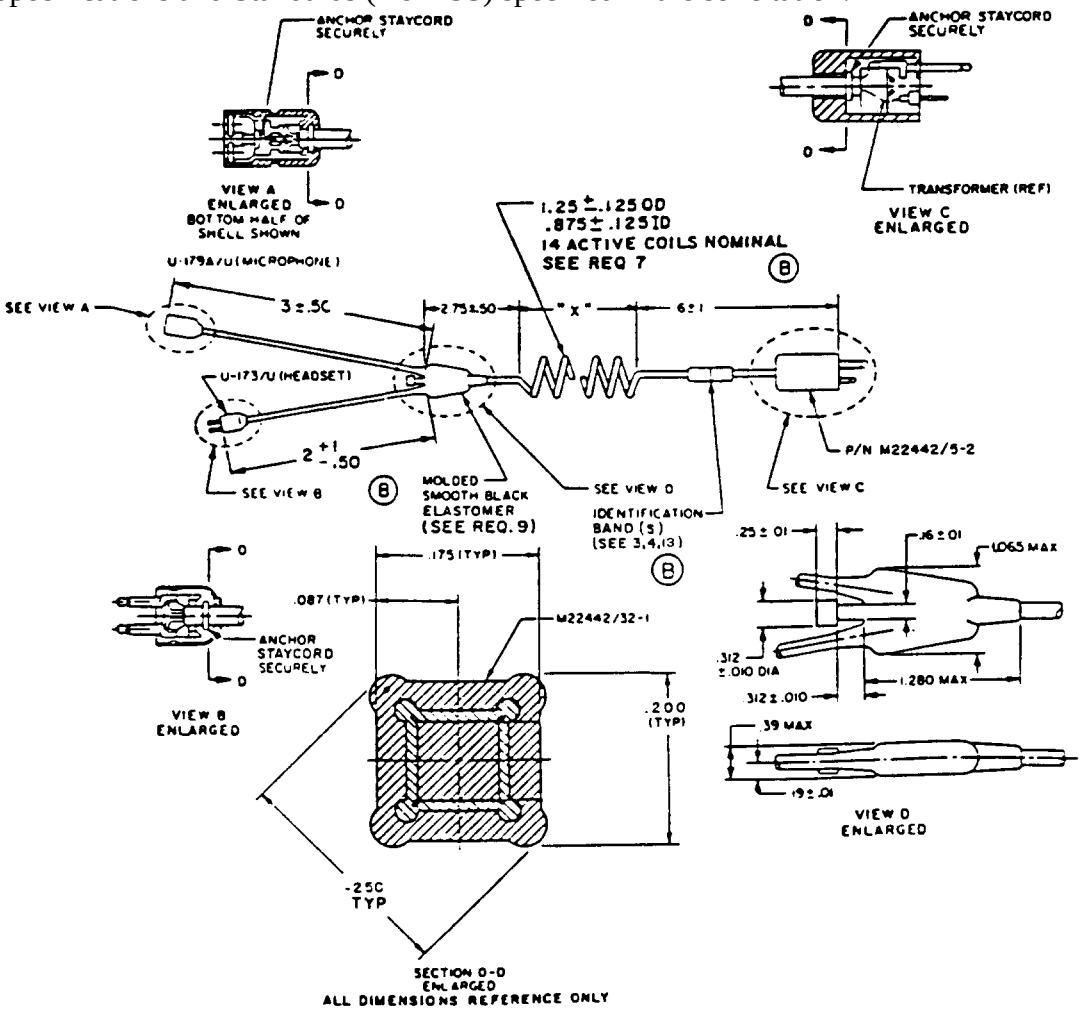


* FIGURE 1. Cable assembly P/N M22442/26-1.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

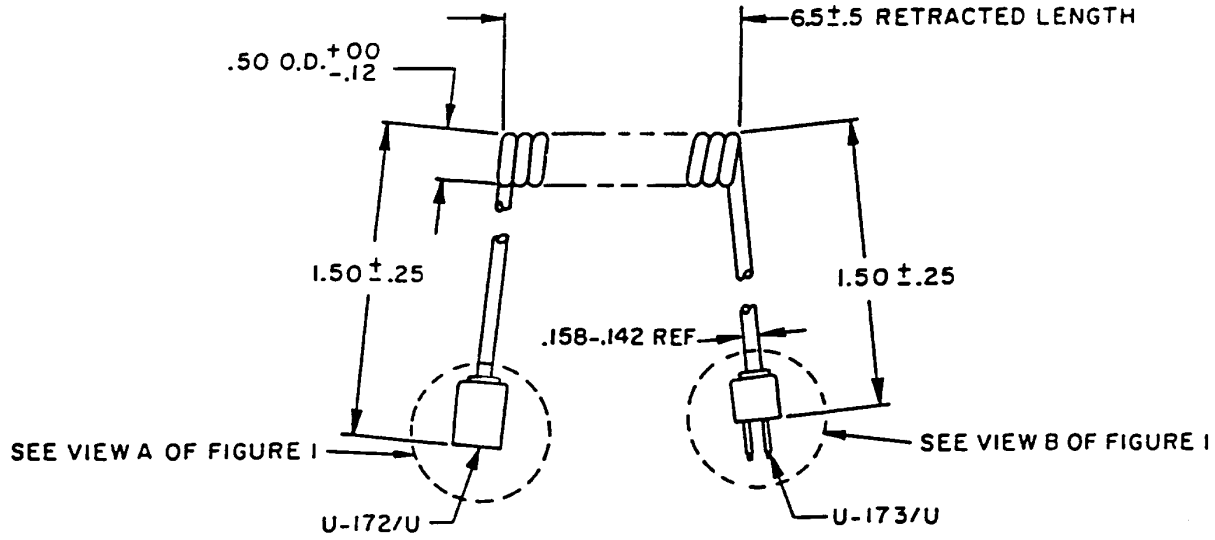



FIGURE 2. Cable assembly headset extension P/N M22442/26-2.

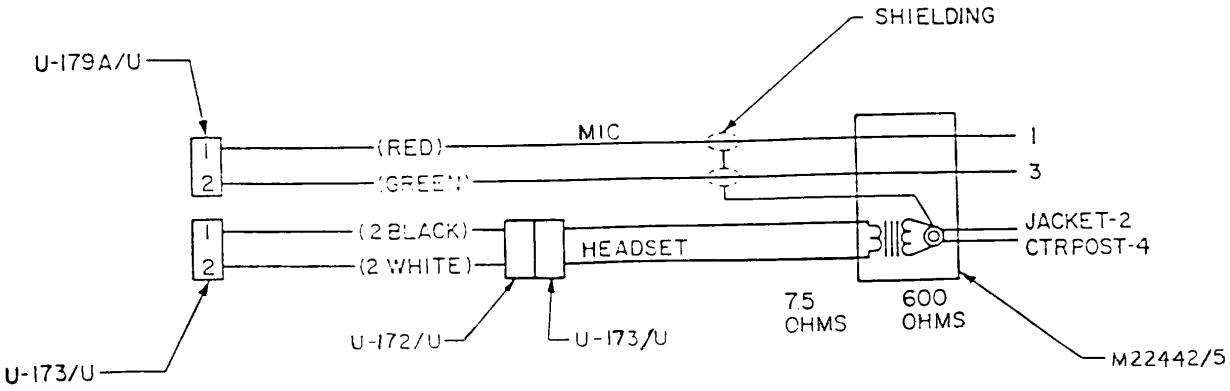



FIGURE 3. Cable assembly P/N/M22442/26-3 Schematic Diagram.

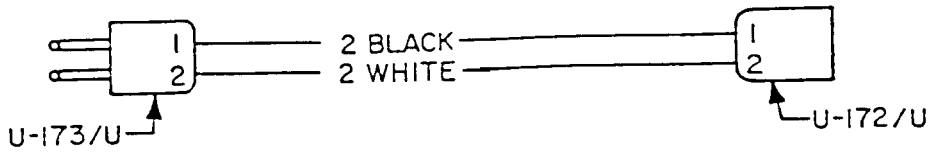



FIGURE 4. Cable assembly P/N M22442/26-2 Schematic Diagram.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

l. The M22442/26-3 cable assembly consists of one M22442/26-l cable and one M22442/26-2 cable.

*2. The cable (cord) for the M22442/26-l cable assembly shall be in accordance with M22442/35-l. The cable (cord) for the M22442/26-2 cable shall be in accordance with M22442/35-1 with the black and white conductors only. The electrostatic and electromagnetic isolation requirements of M22442/35-1 and -2 are not required.

3. The weight of the cable assembly shall not be greater than 6 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance for P/N M22442/26-l shall be as indicated when tested with an ohmmeter.

(a) Contact l of U-l79/U and contact l of P/N M22442/5-2 less than 2 ohms.

(b) Contact 2 of U-l79/U and contact 3 of P/N M22442/5-2 less than 2 ohms.

(c) Contact l of U-l73/U and contact 2 of U-l73/U less than l0 ohms.

(d) Contact 2 of P/N M22442/5-2 and contact 4 of P/N M22442/5-2 less than 100 ohms.

6. The DC resistance for P/N M22442/26-2 shall be less than 2 ohms between the following contacts when tested with an ohmmeter.

(a) Contact l of U-l73/U and contact l of U-l72/U.

(b) Contact 2 of U-l73/U and contact 2 of U-l72/U.

7. The "X" dimension shall be 42.25 +3 -5 before coiling.

8. The cable assembly shall be tested in accordance with the applicable tests listed in table I.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification sheet supersedes Naval Air Systems Command Drawing 765AS285.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy -AS
(Project 5995-0128-22)

TABLE I. Tests

| Inspection | Requirement Paragraph | Test Paragraph | Group I Qualification Tests | Group II Quality Conformance Test 100% | Group III Sample Testing Per 4.4.1 |
|---|---|---|---|---|---|
| GROUP A (ALL SAMPLE UNITS) 1/ | | | | | |
| Visual & Mechanical Inspection | 3.1 & 3.4 | 4.5.2 | X | X | |
| Soldering | 3.4.18 | 4.5.2.1 | X | X | |
| Transformer Efficiency 2/ | 5 | 10a | X | | X |
| Transformer Input Matching Impedance 2/ | 6 | 10b | X | | X |
| Transformer Distortion 2/ | 7 | 10c | X | | X |
| Transformer dc Winding Resistance 2/ | 8 | 10d | X | | X |
| Transformer Output 2/ | 9 | 10e | X | X | |
| Continuity | 3.5.1 | 4.5.3 | X | X | |

1/ Minimum tests for QPL retention (see paragraph 4.3.3)
2/ The number indicates the requirement or test specified in MIL-DTL-22442/1



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.

TABLE I. Tests - (Continued).

| Inspection | Requirement Paragraph | Test Paragraph | Group I Qualification Tests | Group II Quality Conformance Test 100% | Group III Sample Testing Per 4.4.1 |
|---|---|---|---|---|---|
| GROUP B | | | | | |
| Dielectric Withstanding Voltage | 3.5.2 | 4.5.4 | X | | X |
| Gauging 1/ | 3.5.3 | 4.5.5 | X | | X |
| Pull and Twist Test 1/ | 3.5.4 | 4.5.6 | X | | X |
| Bend Relief Flexibility | 3.5.5 | 4.5.7 | X | | X |
| Durometer Hardness | 3.5.10 | 4.5.12 | X | | X |
| GROUP C | | | | | |
| Low Temperature Flexibility | 3.5.6 | 4.5.8 | X | | X |
| Durability 1/ | 3.5.7 | 4.5.9 | X | | X |
| Ozone Resistance 1/ | 3.5.8 | 4.5.10 | X | | X |
| Jacket Elongation | 3.5.9 | 4.5.11 | X | | X |
| GROUP D 1/ | | | | | |
| Salt Fog | 3.6.2 | 4.6.2 | X | | |
| Vibration | 3.6.4 | 4.6.4 | X | | |
| Humidity | 3.6.5 | 4.6.5 | X | | |
| Thermal Shock | 3.6.5 | 4.6.6 | X | | |

l/ Minimum tests for QPL retention (see paragraph 4.3.3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:29Z
Check the source to verify that this is the current version before use.