
MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13127/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

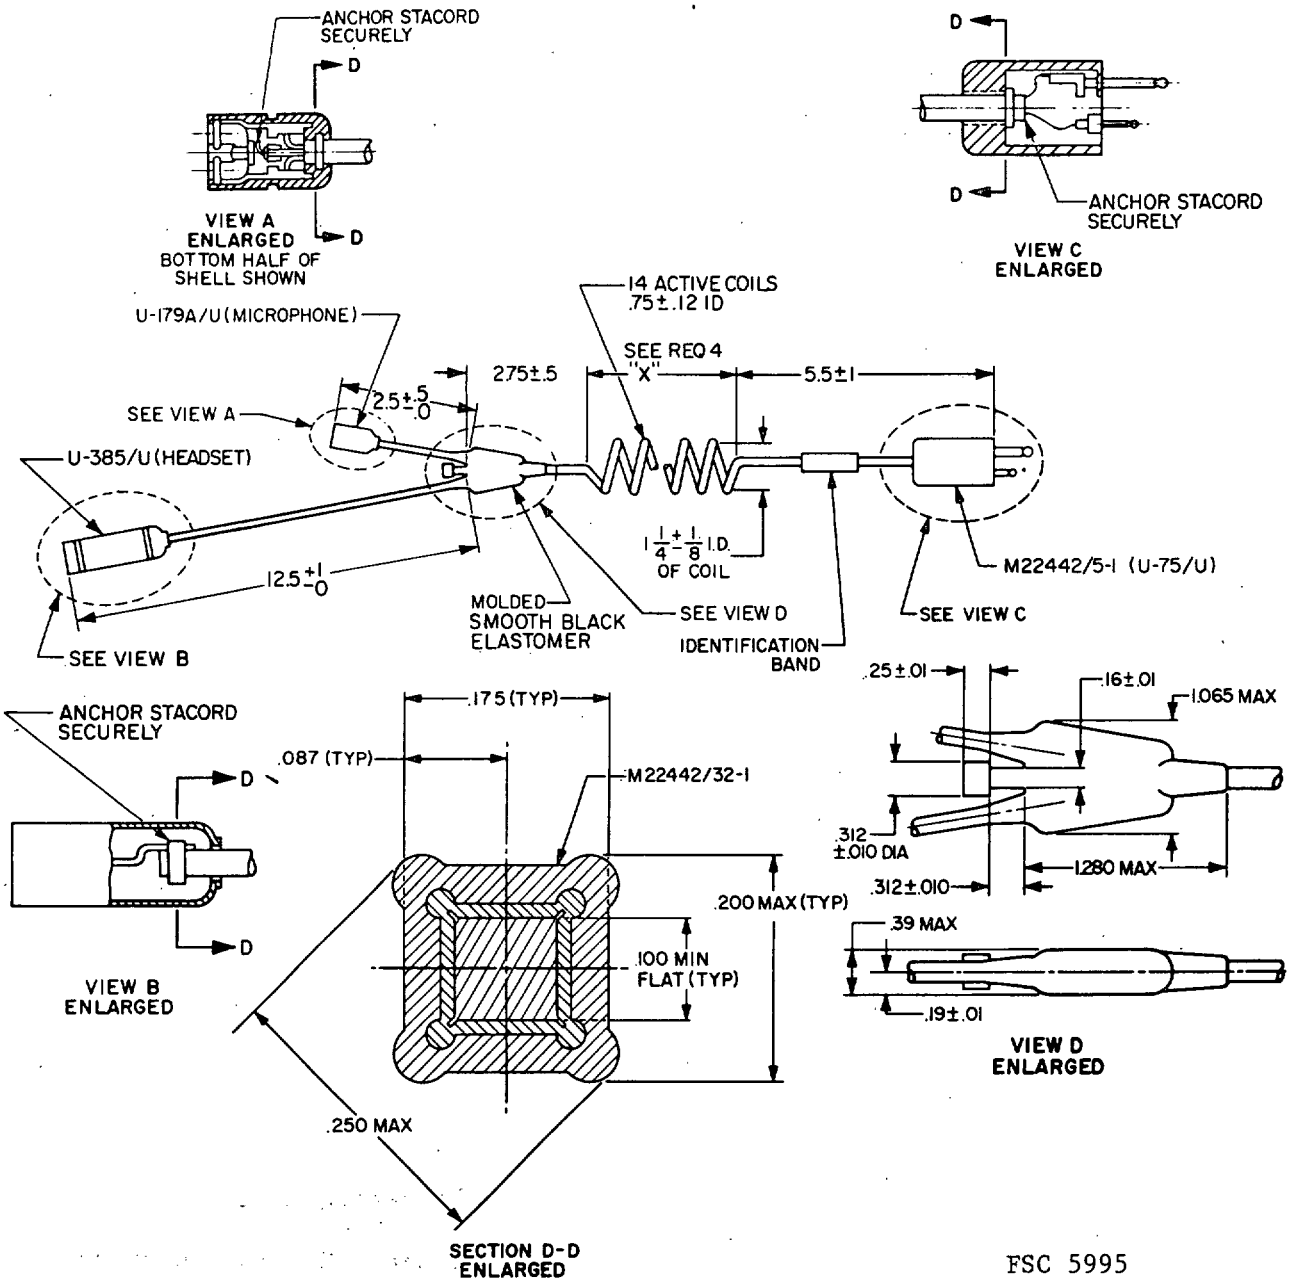

FSC 5995

FIGURE 1. Cable assembly CX-13127/A

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

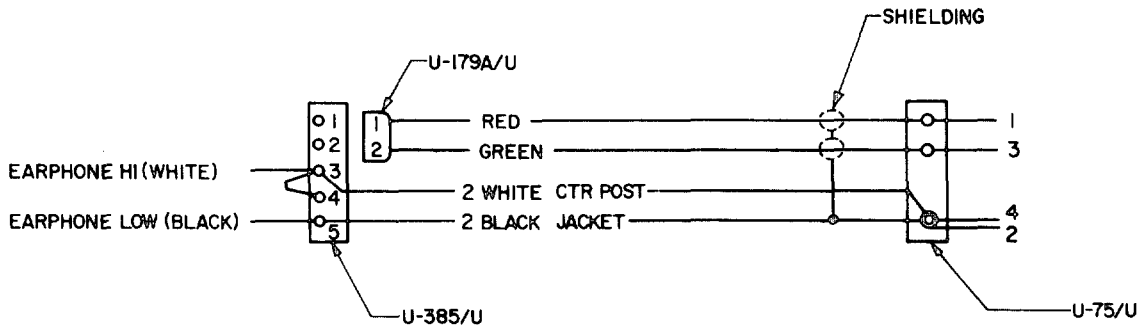


FIGURE 2. Cable assembly CX13127/A schematic diagram

REQUIREMENTS:

1. The cable cord shall be in accordance with M22442/35-1.

2. The weight of the cable assembly shall not be greater than 5 oz.

3. The stay cord shall be firmly attached to the connectors.

4. The "X" dimension shall be 42.25 ± .50 before coiling and 8.50 ± .50 after coiling.

5. The DC resistance shall be less than 1 ohm between the following contacts:

   (a) Contact 1 of M22442/5-1 (U-75/U) and contact 1 of U-179A/U.

   (b) Contact 3 of M22442/5-1 (U-75/U and contact 2 of U-179A/U.

   (c) Contact 4 of M22442/5-1 (U-75/U) and contact 3 of U-385/U.

   (d) Contact 2 of M22442/5-1 (U-75/U and contact 5 of U-385/U.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are ±.25 inch unless otherwise specified.

3. This specification supersedes Naval Air Systems Command Drawing 765AS286.

Preparing Activity:
Navy - AS
Project No. 5995-N109-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

TABLE I. CX-13127/A cable assembly inspections.

Inspection	Paragraph		Group I	Group II	Group III
	Require-ments	Test	Qualifi-cation tests	Quality conformance inspection 100%	Sample testing per 4.5.1
GROUP A (ALL SAMPLE UNITS)					
Visual & Mechanical Inspection	3.1,3.4, 3.6	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Dielectric Withstanding Voltage	3.5.5	4.6.7	X	X	
Insulation Resistance	3.5.4	4.6.6	X	X	
Pull Test	3.5.7	4.6.9	X		X
Cable Reverification (Specimen)	3.5.15	4.6.17	X	X	
DC Resistance	3.5.2	4.6.4	X	X	
GROUP B (4 SAMPLES)					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
GROUP C (2 SAMPLES)					
Ozone Resistance	3.5.14	4.6.16	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP D (4 SAMPLES)					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.1	4.7	X		
Thermal Shock	3.5.9	4.6.11	X		
Vibration	3.6.1	4.7	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.