INCH-POUND

MIL-C-22442/27B(AS)
26 May 1989
SUPERSEDING
MIL-C-22442/27A(AS)
14 November 1988

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-13127/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

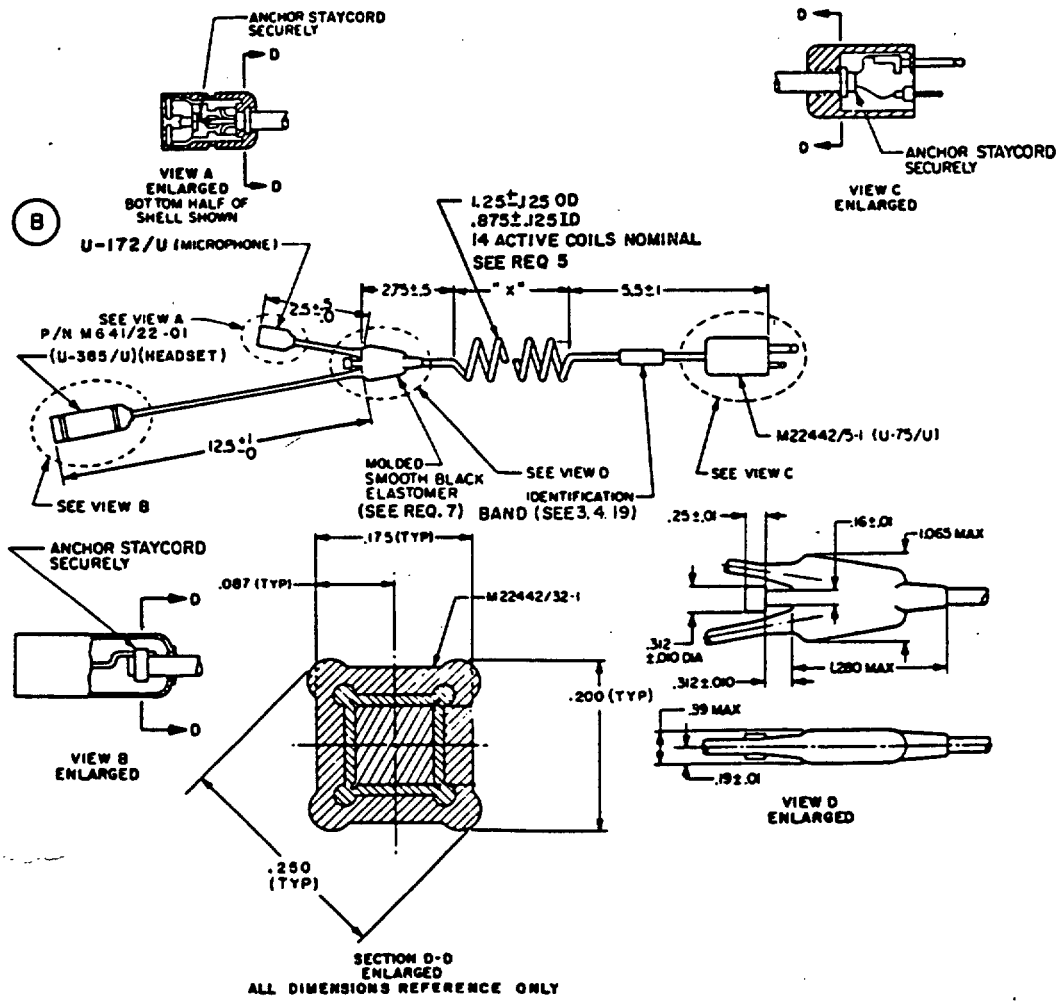


FIGURE 1. Cable assembly CX-13127/A P/N M22442/27-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z .
Check the source to verify that this is the current version before use.

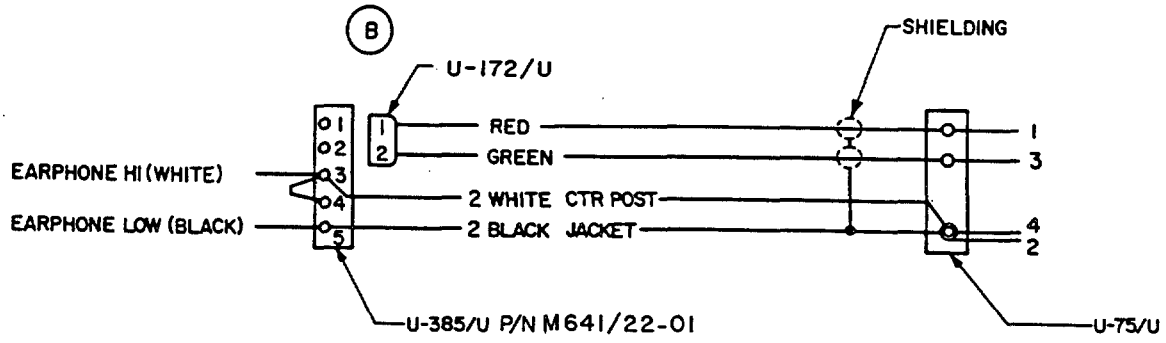


FIGURE 2. Cable assembly P/N M22442/27-1 CX-13127/A schematic diagram.

APPLICABLE DOCUMENTS:

MIL-J-641/22	Jacks, Telephone, General Specification for
MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes

REQUIREMENTS:

1. The cable cord shall be in accordance with M22442/35-1. The electrostatic and electromagnetic isolation requirements of M22442/35-1 are not required.

2. The weight of the cable assembly shall not be greater than 5 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. The DC resistance shall be less than 2 ohms between the following contacts:

(B) (a) Contact 1 of P/N M22442/5-1 (U-75/U) and contact 1 of U-172/U.

(B) (b) Contact 3 of P/N M22442/5-1 (U-75/U) and contact 2 of U-172/U.

(c) Contact 4 of P/N M22442/5-1 (U-75/U) and contact 3 of P/N M641/22-01 (U-385/U).

(d) Contact 2 of P/N M22442/5-1 (U-75/U) and contact 5 of P/N M641/22-01 (U-385/U).

5. The "X" dimension shall be 42.25 +3 -.5 before coiling.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

7. Molded Smooth Black Elastomer shall be in accordance with MIL-R-6855, Class II, Type A, GR 60.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are metal parts ±.005, molded sections ±.05 inchess unless otherwise specified.
3. This specification supersedes Naval Air Systems Command Drawing 765AS286.

Preparing Activity:
Navy - AS
Project No. 5995-N129

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.