DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-13127/A

This specification sheet is approved for use by the Naval Air Systems Command, Department Of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

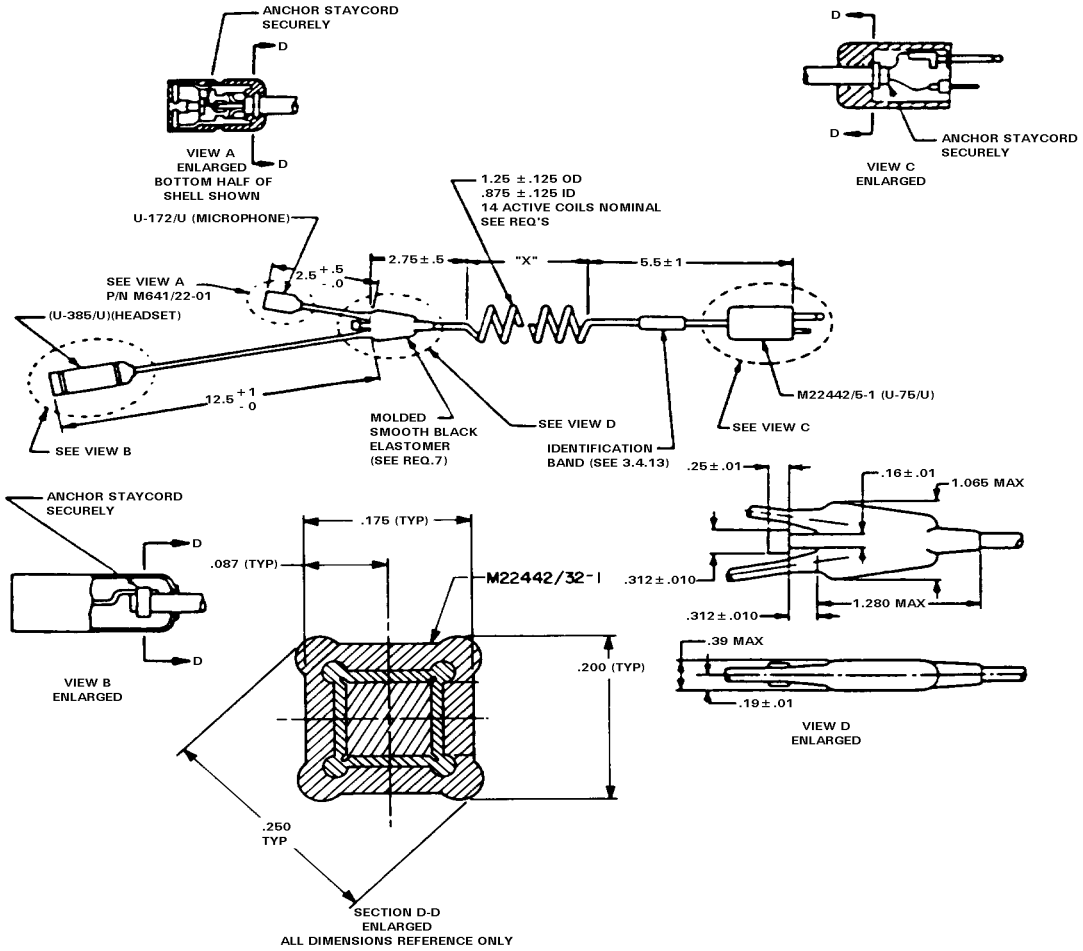

FIGURE 1. Cable assembly CX-13127/A P/N M22442/27-1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

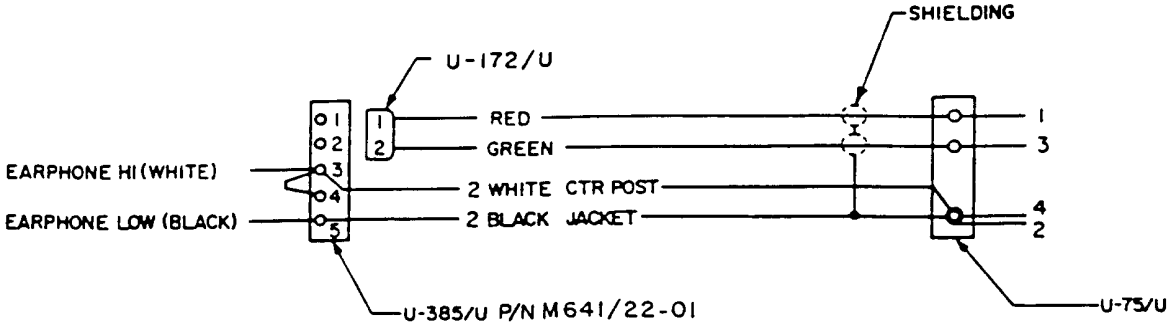

FIGURE 2. Cable assembly P/N M22442/27-l CX-13127/A Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-J-64l/22 - Jacks, Telephone, U-385/U

REQUIREMENTS:

l. The cable cord shall be in accordance with M22442/35-l. The electrostatic and electromagnetic isolation requirements of M22442/35-l are not required.

2. The weight of the cable assembly shall not be greater than 5 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. The DC resistance shall be less than 2 ohms between the following contacts:

(a) Contact l of P/N M22442/5-l (U-75/U) and contact l of U-l72/U.

(b) Contact 3 of P/N M22442/5-l (U-75/U) and contact 2 of U-l72/U.

(c) Contact 4 of P/N M22442/5-l (U-75/U) and contact 3 of P/N M64l/22-0l (U-385/U).

(d) Contact 2 of P/N M22442/5-l (U-75/U) and contact 5 of P/N M64l/22-0l (U-385/U).

5. The "X" dimension shall be 42.25 +3 -.5 before coiling.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.

3. This specification supersedes Naval Air Systems Command Drawing 765A5286.

Preparing activity:
Navy - AS
(Project No. 5995-0128-23)

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:30Z
Check the source to verify that this is the current version before use.