MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-13155/A AND CX-13164/A

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

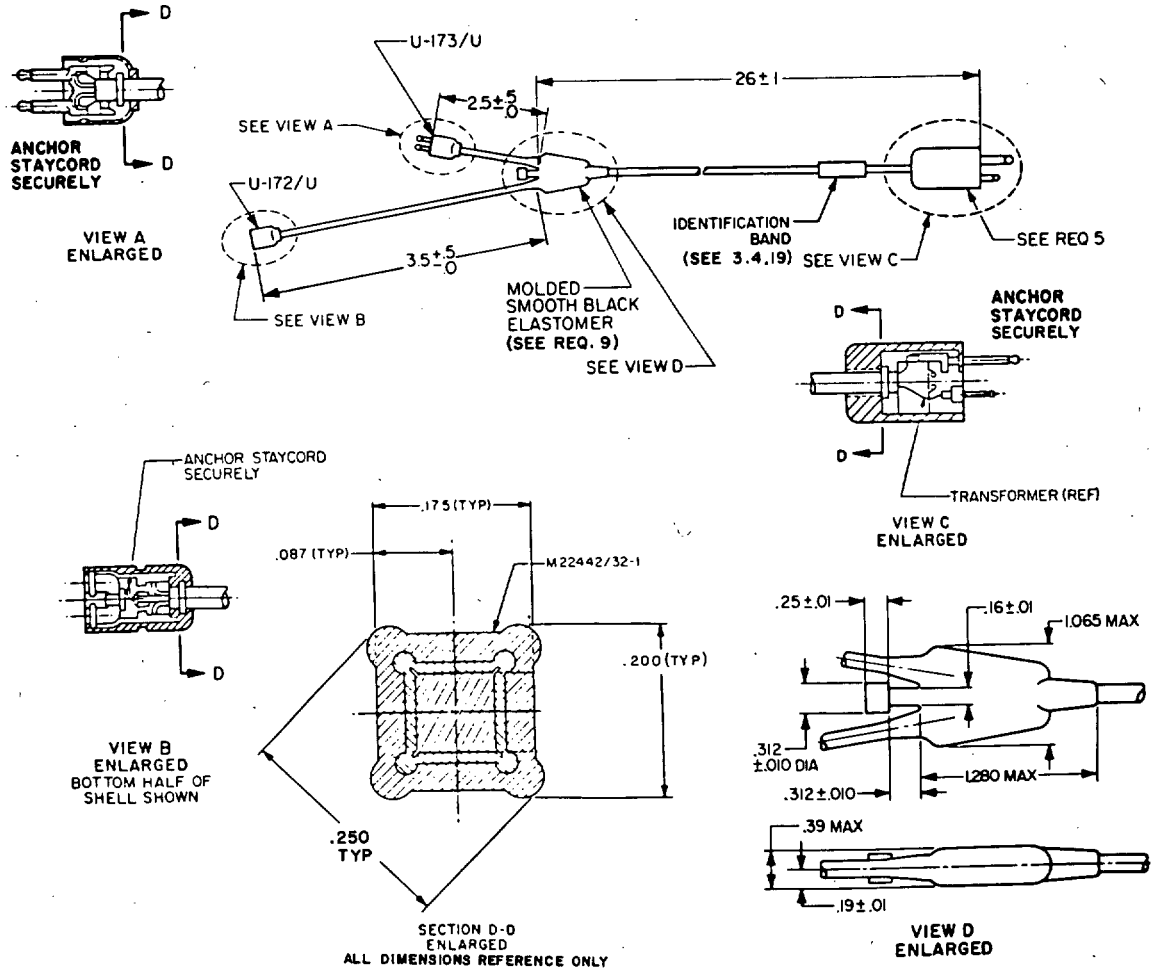


FIGURE 1. Cable assembly CX-13155/A P/N M22442/30-1 and CX-13164/A P/N M22442/30-2.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

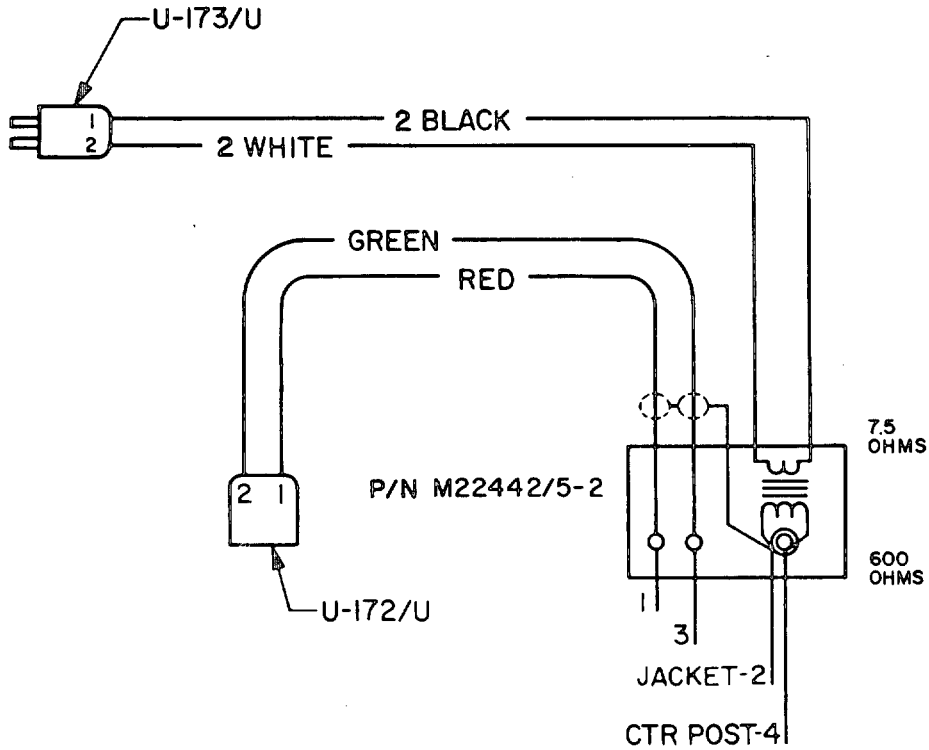


FIGURE 2. Cable assembly CX-13155/A P/N M22442/30-1 schematic diagram.

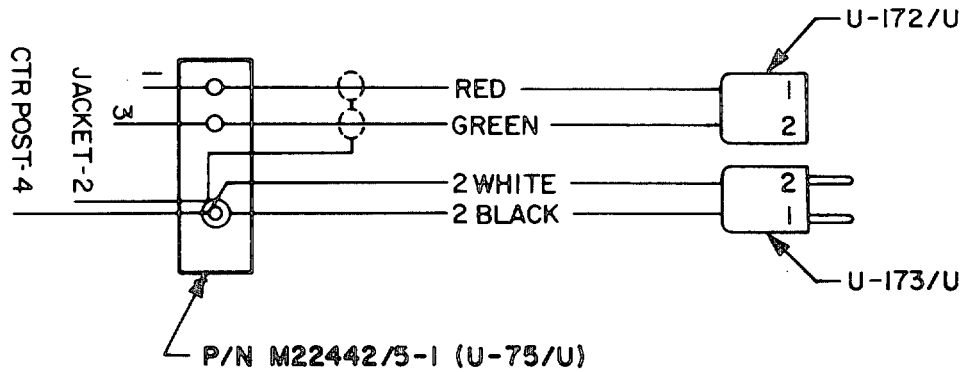


FIGURE 3. Cable assembly CX-13164/A P/N M22442/30-2 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded

APPLICABLE DRAWINGS:

AIR FORCE

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

1. The cable (cord) shall be in accordance with M22442/35-2.
2. The weight of the cable assembly shall not be greater than 6 ounces.
3. The stay cord shall be firmly attached to the connectors.
4. The following parts shall be supplied in a plastic bag with each cable:
   (a) One P/N M22442/32-5 nut, tee.
   (b) One P/N M22442/32-6 screw, visor housing.
   (c) One P/N M22442/32-7 clip, cable.

(A) 5. The P/N M22442/30-1 cable assembly shall terminate in a P/N M22442/5-2 connector and the P/N M22442/30-2 cable assembly shall terminate in a P/N M22442/5-1 (U-75/U) connector.

(A) 6. The DC resistance of the P/N M22442/30-1 cable assembly shall be as indicated when tested with a suitable ohmmeter.

(A) (a) Contact 1 of U-172/U and contact 1 of P/N M22442/5-2 less than 2 ohms.

(A) (b) Contact 2 of U-172/U and contact 3 of P/N M22442/5-2 less than 2 ohms.

(A) (c) Contact 1 of U-173/U and contact 2 of U-173/U less than 10 ohms.

(A) (d) Contact 2 of P/N M22442/5-2 and contact 4 of P/N M22442/5-2 less than 100 ohms.

(A) 7. The DC resistance of the P/N M22442/30-2 cable assembly shall be less than 2 ohms between the following contacts:
   (a) Contact 1 of U-173/U and contact 2 of P/N M22442/5-1 (U-75/U).
   (b) Contact 2 of U-173/U and contact 4 of P/N M22442/5-1 (U-75/U).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

(c) Contact 1 of U-172/U and contact 1 of P/N M22442/5-1 (U-75/U).

(d) Contact 2 of U-172/U and contact 3 of P/N M22442/5-1 (U-75/U).

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. Molded Smooth Black Elastomer shall be in accordance with MIL-R-6855, Class II, Type A, GR 60.

10. The U-173/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Naval Air Systems Command Drawing 765AS289.

Preparing Activity:
Navy - AS
Project No. 5995-N120-44

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

(A) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP D 1/					
Temperature-Altitude 3/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
3/ Steps 3 and 12 only for P/N M22442/30-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.