MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

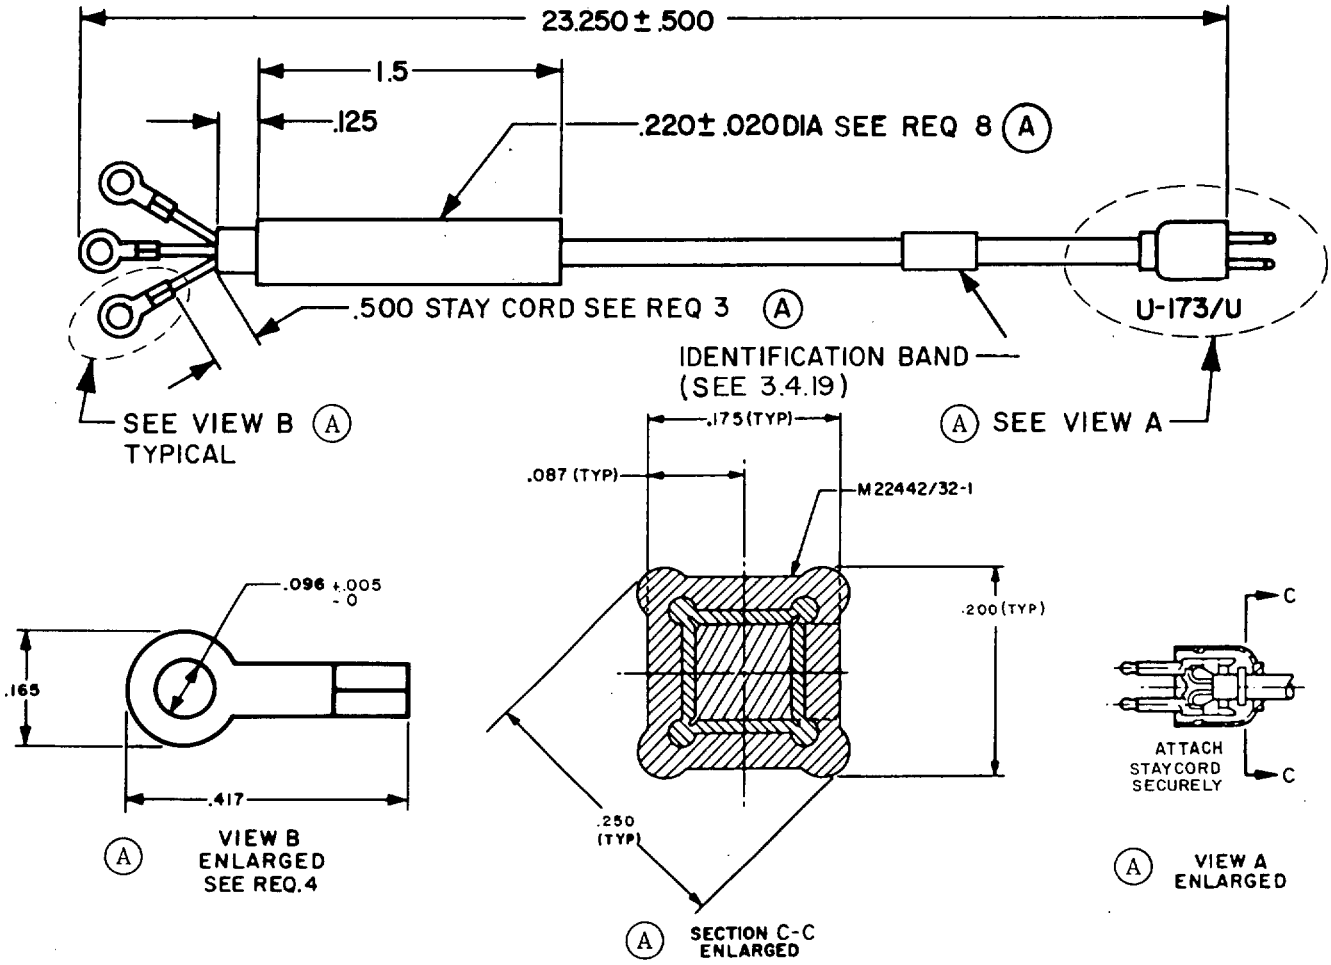


FIGURE 1. Cable assembly P/N M22442/31-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

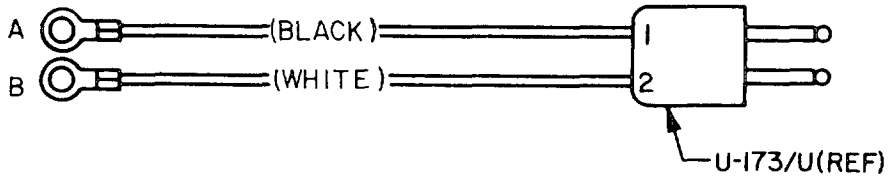


FIGURE 2. Cable assembly P/N M22442/31-1 schematic diagram.

APPLICABLE DOCUMENTS:

MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded
MIL-C-55668	Cord, Electrical; Audio Subminiature (Retractile and Straight)
MIL-C-10392	Cord, Electrical (Audio Miniature)

APPLICABLE DRAWINGS

AIR FORCE

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

(A) 1. The cable (cord) shall be in accordance with MIL-C-55668, Type III, 2 conductor, or MIL-C-10392 Type WD-27.

2. The stay cord shall be firmly attached to the connector.

(A) 3. The stay cord shall be .250 longer than the conductors.

(A) 4. The ring terminal shall be brass with nickel finish, AMP P/N 31518 or equivalent.

(A) 5. The DC resistance shall be less than 2 ohms between the following contacts.

(a) Contact A and contact 1 of U-173/U.

(b) Contact B and contact 2 of U-173/U.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

(A) 7. The weight of the cable assembly shall not be greater than 1 ounce.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

(A) 8. The .220 diameter may be molded smooth black elastomer in accordance with MIL-R-6855, Class II, Type A, GR 60, or built up with shrink tubing.

(A) 9. The cable assembly shall be tested in accordance with the tests listed in Table I.

10. The U-173/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Preparing Activity:
Navy - AS
Project No. 5995-N120-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

(A) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.