INCH-POUND
MIL-DTL-22442/31B(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/31A (AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

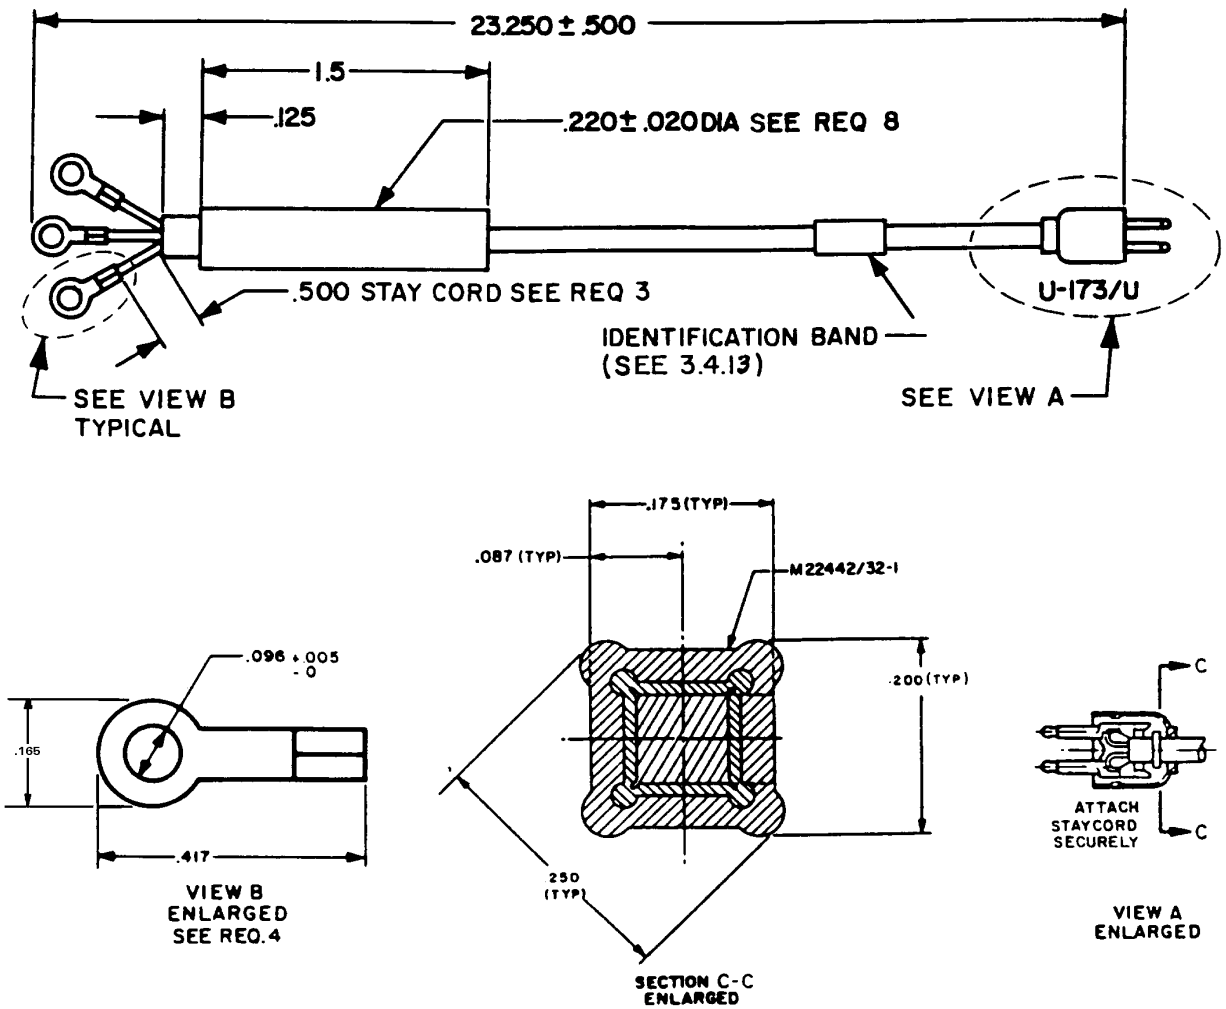

FIGURE l. Cable assembly P/N M22442/31-l.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

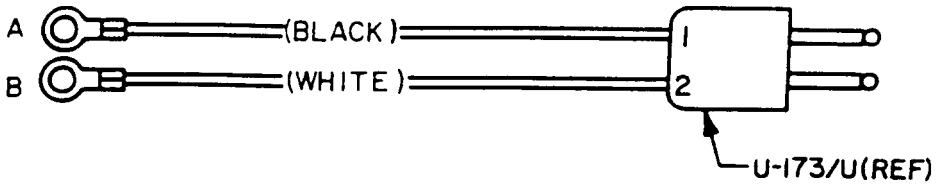

FIGURE 2. Cable assembly P/N M22442/31-l Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-C-55668 - Cord, Electrical; Audio Subminiature (Retractile and Straight)

MIL-C-l0392 - Cord, Electrical (Audio Miniature)

APPLICABLE DRAWINGS

AIR FORCE

57B12662 - Connector, Plug Electrical U-173/U

57B12664 - Tip - Electrical, Plug Connector

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with requirements of MIL-C-10392 Type WM-59A/U, or MIL-C-55668 Type III 2 conductor or equal

2. The stay cord shall be firmly attached to the connector.

3. The stay cord shall be .250 longer than the conductors.

4. The ring terminal shall be brass with nickel finish, AMP P/N 31518 or equivalent (as approved by the qualifying activity).

5. The DC resistance shall be less than 2 ohms between the following contacts.

(a) Contact A and contact 1 of U-l73/U.

(b) Contact B and contact 2 of U-l73/U.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

7. The weight of the cable assembly shall not be greater than l ounce.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

*8. The .220 diameter may be molded smooth black elastomer , or built up with shrink tubing.

9. The cable assembly shall be tested in accordance with the tests listed in Table I.

10. The U-l73/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Preparing activity:
Navy - AS
(Project No. 5995-0l28-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:31Z
Check the source to verify that this is the current version before use.