MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), ASSOCIATED PARTS

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the parts described herein shall consist of this document and the latest issue of specification MIL-C-22442.

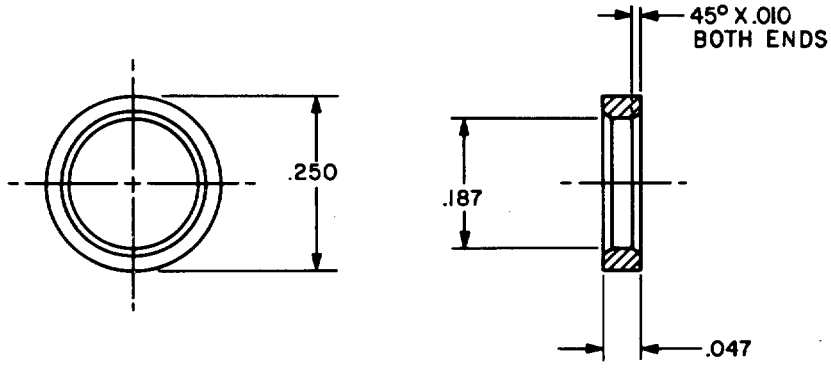


FIGURE 1. Clamp-electrical plug connector.
P/N M22442/32-1

REQUIREMENTS:

1. The clamp shall be brass in accordance with QQ-B-626, Alloy 360, 1/2 hard.

2. The clamp shall be cadmium plated in accordance with QQ-P-416, Class 1, Type II.

NOTES:

1. All dimensions are in inches.

2. Tolerances are $\pm$.005 for inches and $\pm 1^{\circ}$ for angles.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U. S. Air Force Drawing 57A12700 and U. S. Army Electronic Command Drawing SM-B-430255.

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

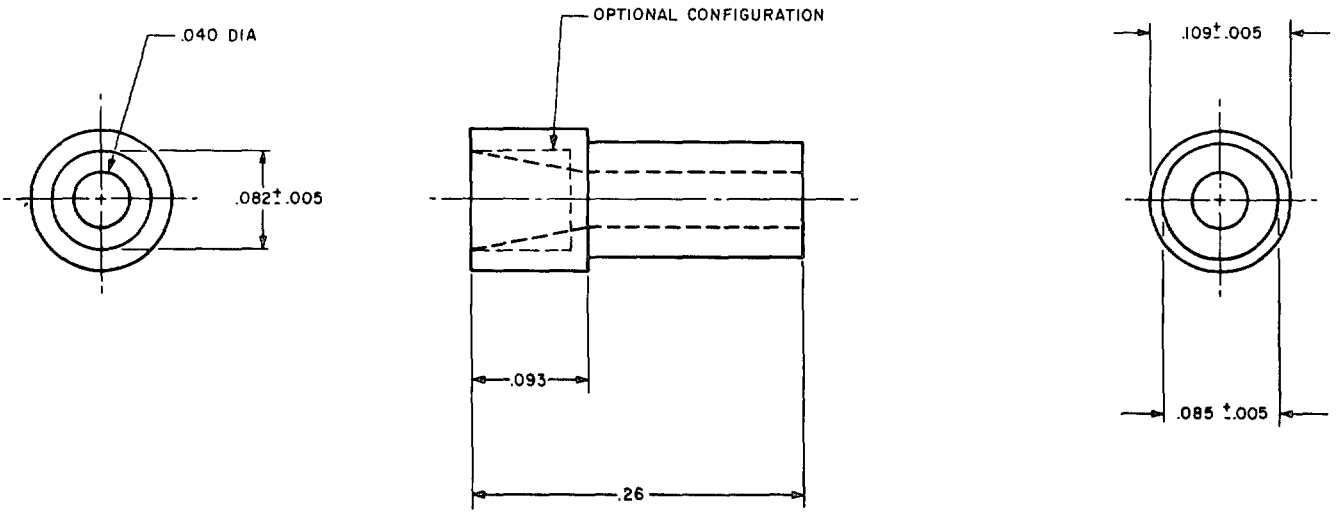


FIGURE 2. Contact-electrical cord assembly beveled.
P/N M22442/32-2

REQUIREMENTS:

1. The contact shall be brass in accordance with QQ-B-626, Alloy 360, 1/2 hard.
2. The contact shall be finished $\sqrt{32}$ in accordance with ANSI B46.1.62.
3. The contact shall be silver plated in accordance with QQ-S-365 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-14072 or nickel plate.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.015 for two place decimals and ±.005 for three place decimals.
3. Remove all burrs and sharp edges.
4. The item described in this specification sheet is the same as U. S. Air Force Drawing 55B12776.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

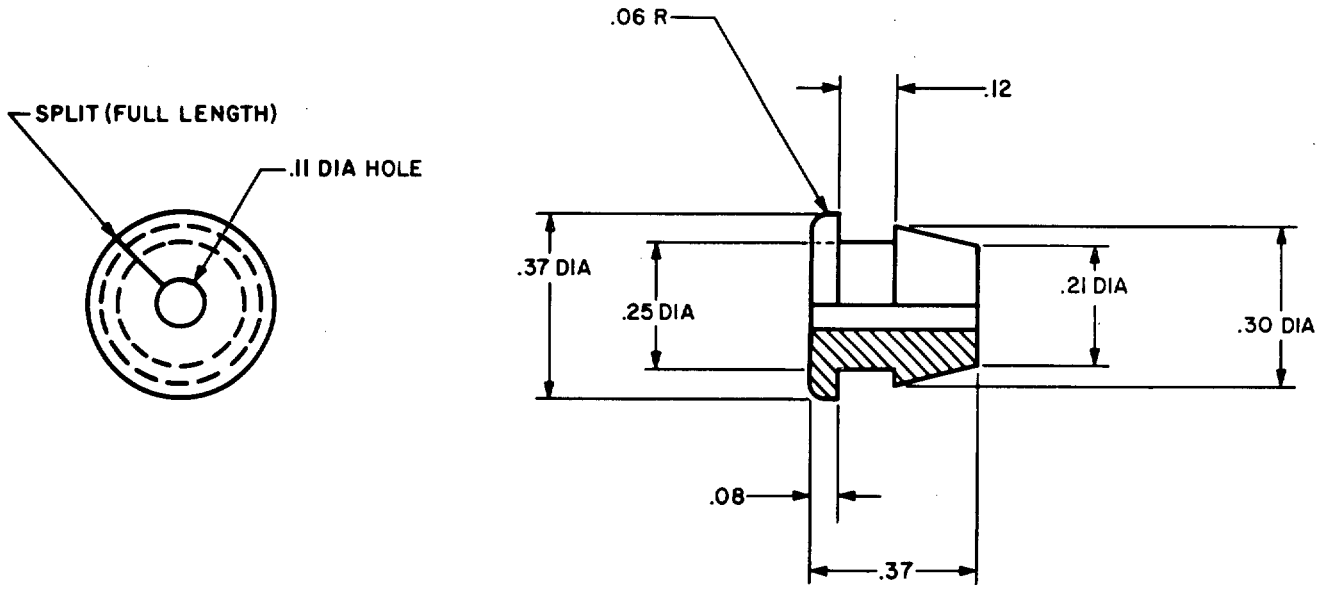


FIGURE 3. Grommet earcup.
P/N M22442/32-3

REQUIREMENTS:

1. The grommet shall be neoprene rubber of 30 durometer hardness in accordance with MIL-R-6855, Class 2, Type B, color black.

NOTES:

1. All dimensions are in inches.
2. Tolerances are $\pm$.02.
3. The item described in this specification sheet is the same as NASC Drawing 765AS234.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

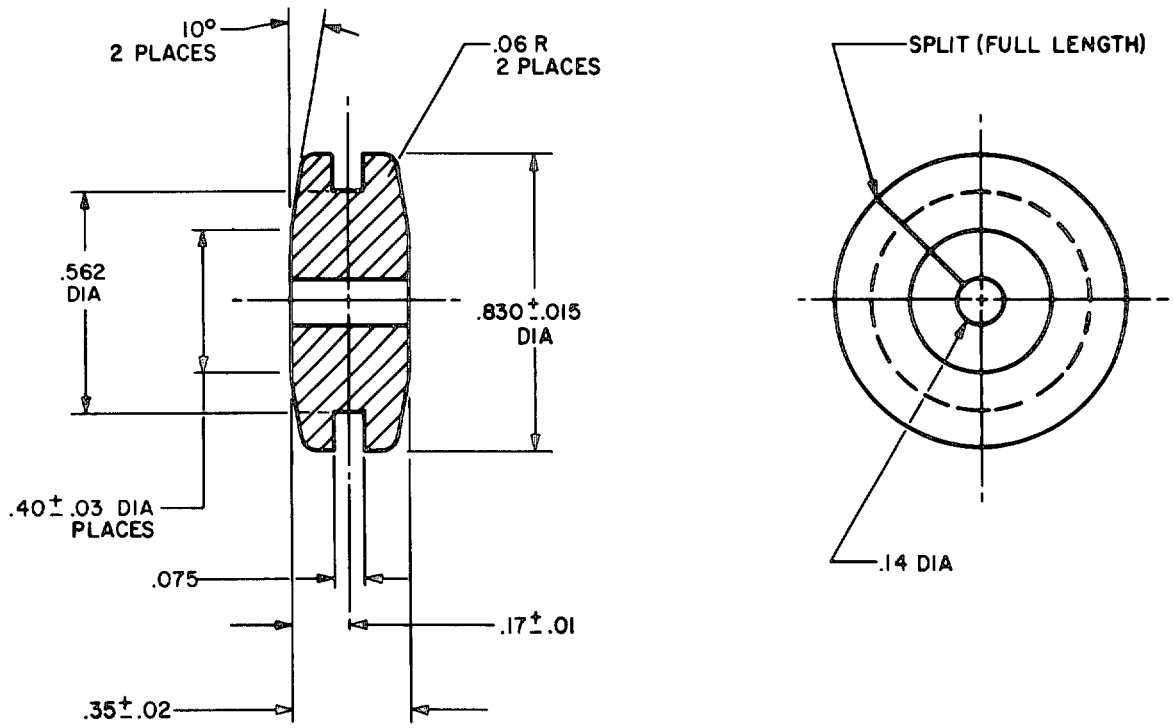


FIGURE 4. Grommet communications cord.
P/N M22442/32-4

REQUIREMENTS:

1. The grommet shall be neoprene rubber of 30 durometer hardness in accordance with MIL-R-6855, Class 2, Type B, color black.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.01 for two place decimals, ±.005 for three place decimals and ±2° for angles.
3. The item described in this specification sheet is the same as NASC Drawing 765AS203.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

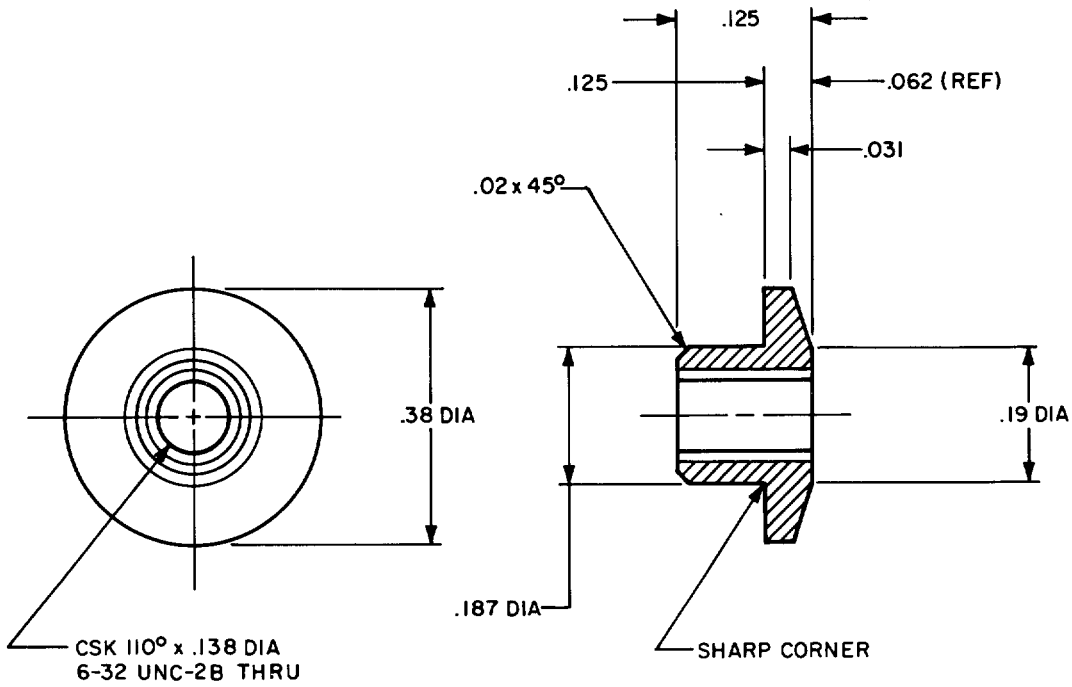


FIGURE 5. Nut, tee, visor.
P/N M22442/32-5

REQUIREMENTS:

1. The nut shall be carbon steel in accordance with QQ-S-637, Comp B113, Cond. CE or Comp 12L 14 Cond. CF.

2. The nut shall be plated in accordance with QQ-P-416 Type II Class 1.

NOTES:

1. All dimensions are in inches.

2. Tolerances are ±.005 for 3 place decimals ±.02 for 2 place decimals ±2° for angles.

3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

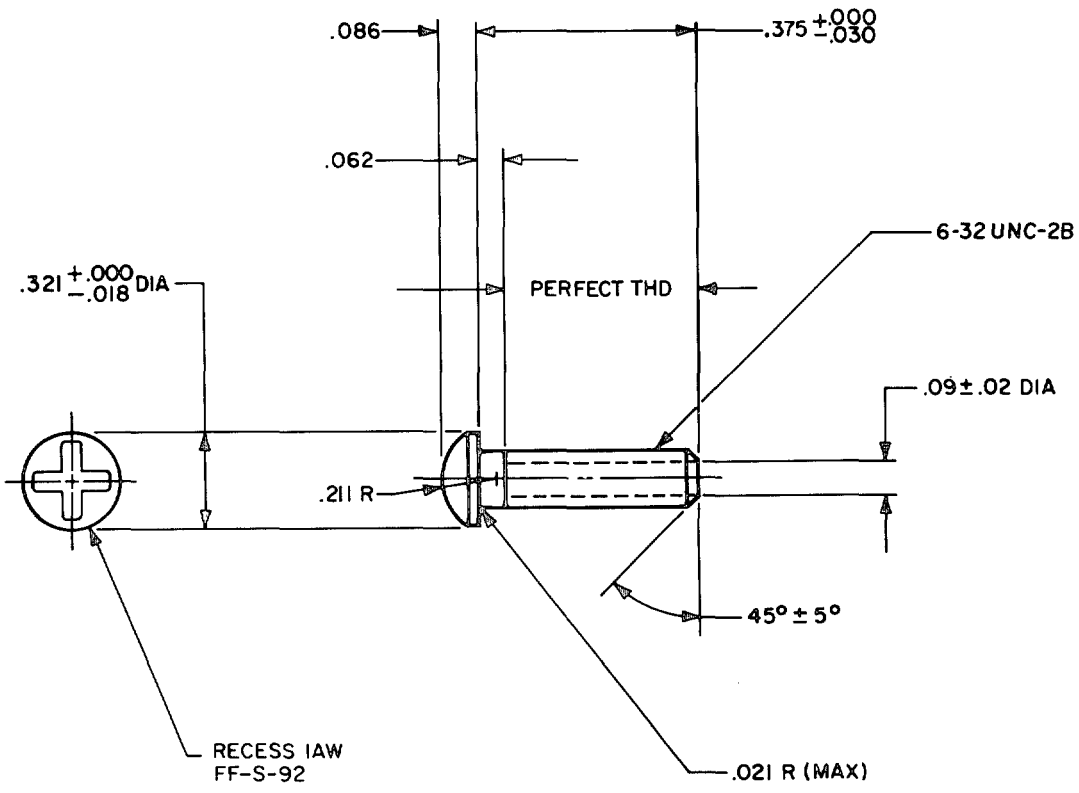


FIGURE 6. Screw, visor housing.
P/N M22442/32-6

REQUIREMENTS:

1. The screw shall be corrosion-resisting steel in the 300 series in accordance with QQ-S-763 and FED-STD-66 or equal to or interchangeable with 16-18 or 18-8 chromium nickel alloy steel.

2. The recess shall be in accordance with Federal Specification FF-S-92.

3. The screw shall passivated in accordance with QQ-P-35 Type II or MIL-STD-171 Finish No. 5.4.1 (a), (b), or (c).

NOTES:

1. All dimensions are in inches.

2. Tolerances are ±.015 for 3 place decimals unless otherwise specified.

3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS260.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

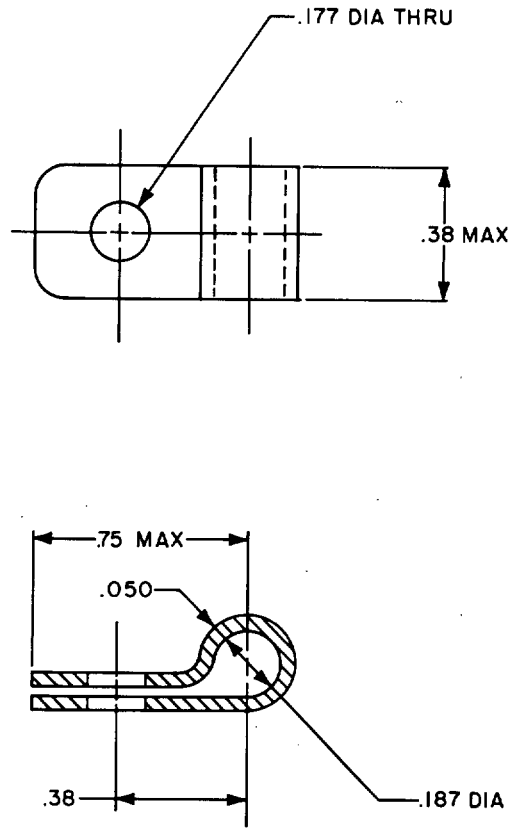


FIGURE 7. Clip cable (nylon).
P/N M22442/32-7

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.02 for 2 place decimals and ±.010 for 3 place decimals.
3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS281.

Custodians:
Air Force - 85
Army - CR

Review Activities:
Air Force - 11
Air Force - 99

Preparing Activity:
Navy - AS
Project No. 5995-N109-8

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—505-038/A5383

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-22442/32	CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), ASSOCIATED PARTS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON, D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Dept.
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.