INCH-POUND

MIL-C-22442/32A
2 August 1991
SUPERSEDING
MIL-C-22442/32
14 November 1984

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), ASSOCIATED PARTS

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22442.

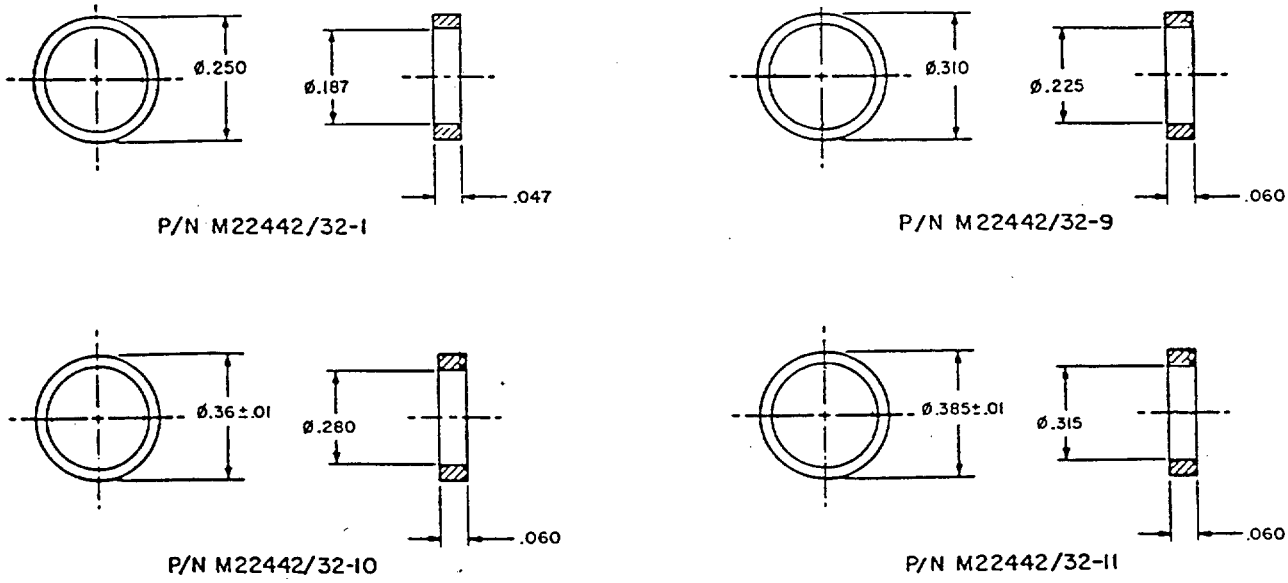



*FIGURE 1. Clamp-electrical plug connector.

REQUIREMENTS:

1. The clamp shall be brass in accordance with QQ-B-626, Alloy 360, 1/2 hard.

2. The clamp shall be cadmium plated in accordance with QQ-P-416, Class 1, Type II.

NOTES:

1. All dimensions are in inches.

2. Tolerances are ±.005 for inches and ±1° for angles.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U.S. Air Force Drawing 57A12700 and U.S. Army Electronic Command Drawing SM-B-430255.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

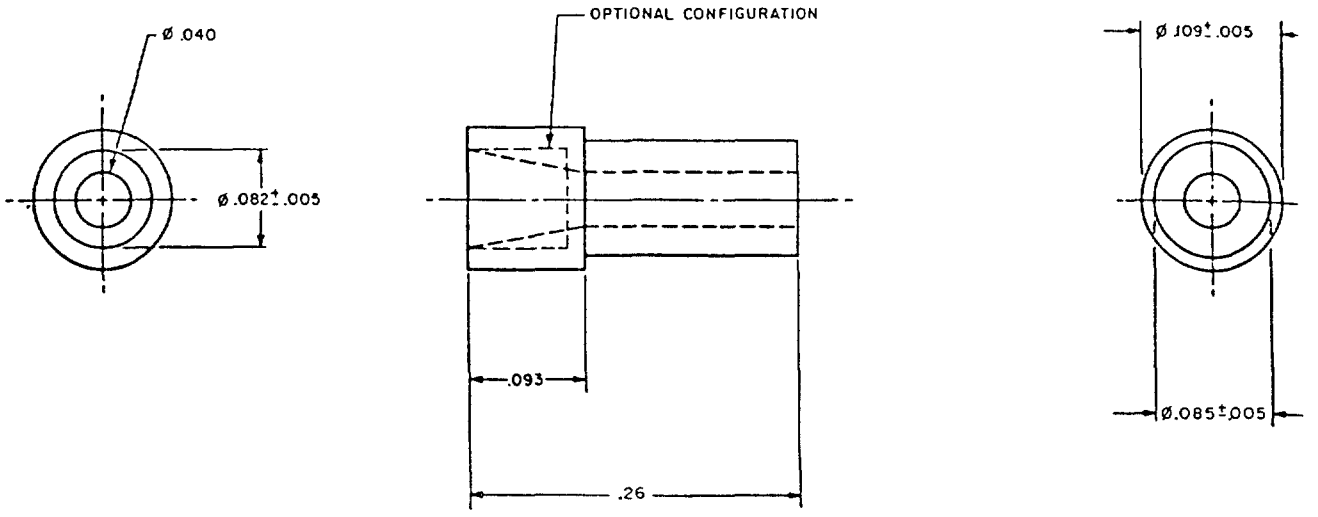



FIGURE 2. Contact-electrical cord assembly beveled P/N M22442/32-2.

REQUIREMENTS:

1. The contact shall be brass in accordance with QQ-B-626, Alloy 360, 1/2 hard.
2. The contact shall be finished $\sqrt{32}$ in accordance with ANSI B46.1.62.
3. The contact shall be silver plated in accordance with QQ-S-365 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-14072 or nickel plate.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.015 for two place decimals and ±.005 for three place decimals.
3. Remove all burrs and sharp edges.
4. The item described in this specification sheet is the same as U.S. Air Force Drawing 55B12776.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

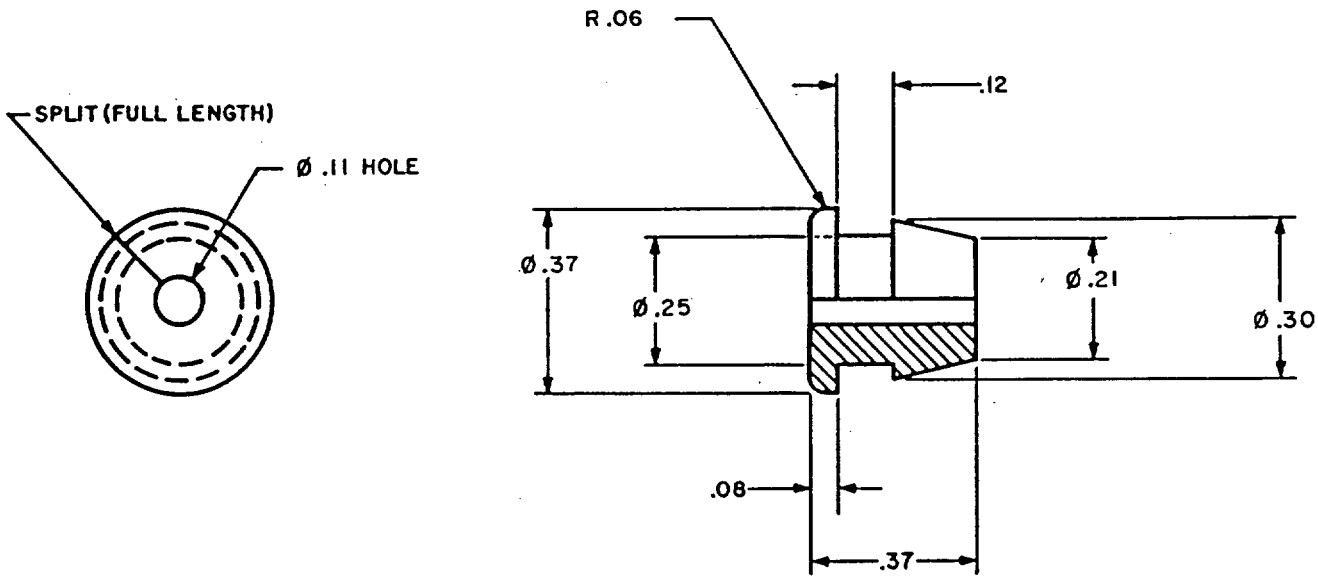



FIGURE 3. Grommet earcup P/N M22442/32-3.

REQUIREMENTS:

1. The grommet shall be neoprene rubber of 30 durometer hardness in accordance with MIL-R-6855, Class 2, Type B, color black.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.02.
3. The item described in this specification sheet is the same as NASC Drawing 765AS234.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

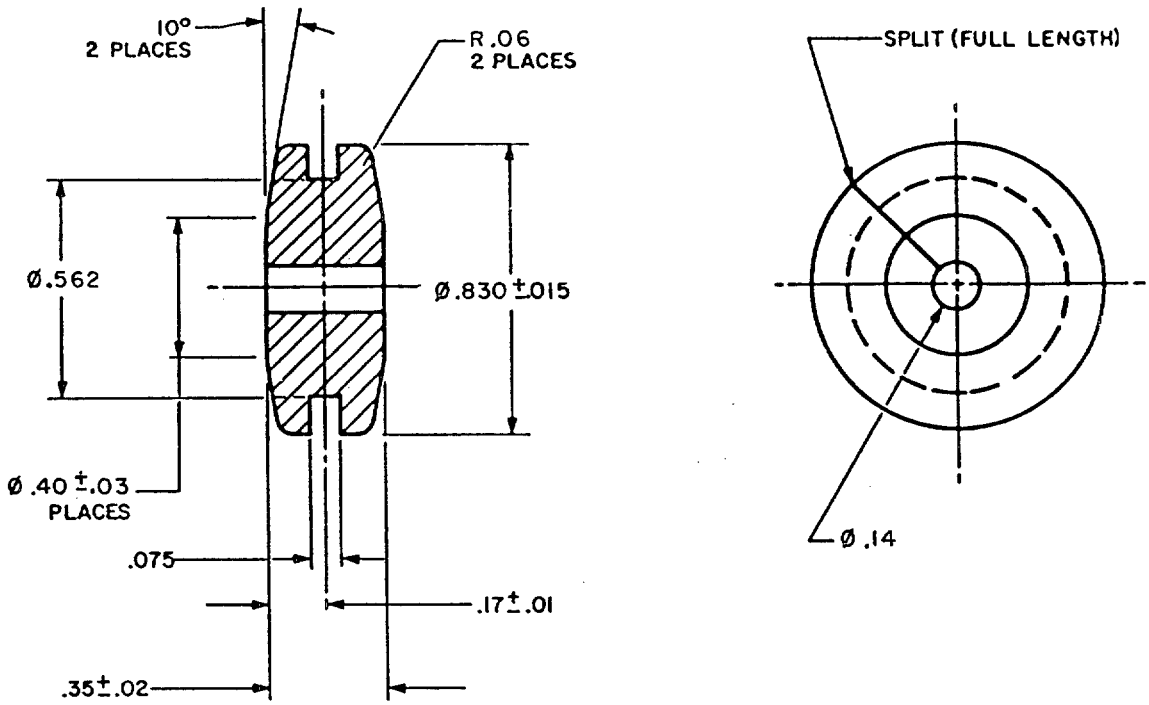



FIGURE 4. Grommet communications cord P/N M22442/32-4.

REQUIREMENTS:

1. The grommet shall be neoprene rubber of 30 durometer hardness in accordance with MIL-R-6855, Class 2, Type B, color black.

NOTES:

1. All dimensions are in inches.
2. Tolerances are +.01 for two place decimals, ±.005 for three place decimals and ±2° for angles.
3. The item described in this specification sheet is the same as NASC Drawing 765AS203.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

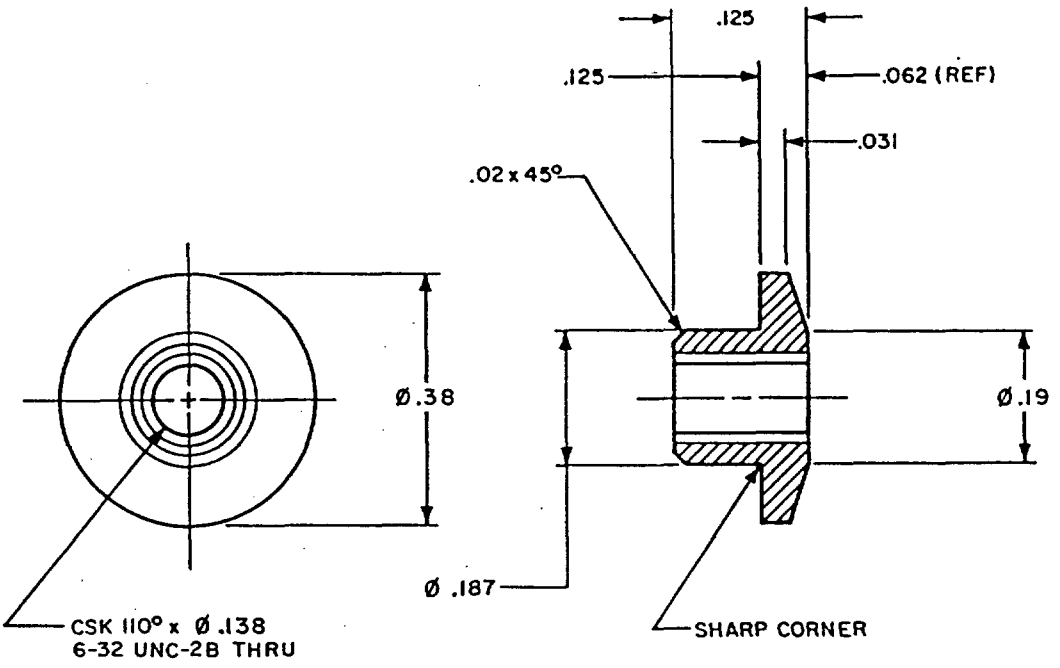



FIGURE 5. Nut, tee, visor P/N M22442/32-5.

REQUIREMENTS:

1. The nut shall be carbon steel in accordance with QQ-S-637, Comp B113, Cond. CE or Comp 12L 14 Cond. CF.

2. The nut shall be plated in accordance with QQ-P-416 Type II Class 1.

NOTES:

1. All dimensions are in inches.

2. Tolerances are ±.005 for 3 place decimals ±.02 for 2 place decimals ±2° for angles.

3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS202.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

*Screw Cable Clip
P/N M22442/32-6

REQUIREMENTS:

1. Screw cable clip shall be made in accordance with MS35026-228.

*Clip Cable (Nylon)
P/N M22442/32-7

REQUIREMENTS:

1. Clip cable shall be made in accordance with NAS1397P3CN.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

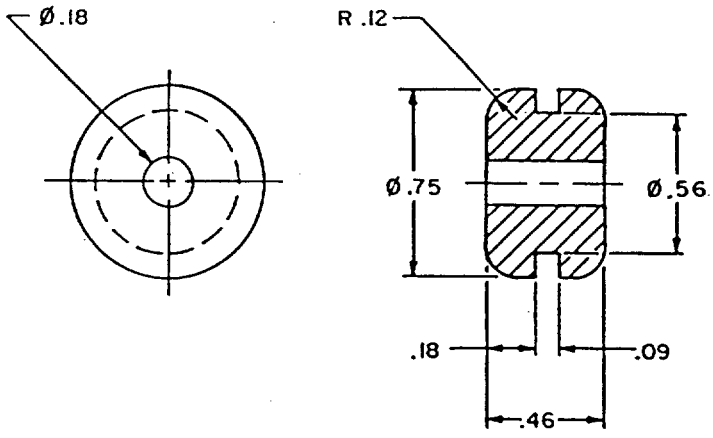



*FIGURE 6. Grommet communications cord P/N M22442/32-8.

REQUIREMENTS:

1. The grommet shall be rubber in accordance with MIL-R-2765 rubber sheet, strip, extruded and molded shapes, synthetic, oil resistant color black.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.01 for two place decimals.
3. The item described in this specification sheet is the same as U.S. Air Force Drawing 61B21717.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

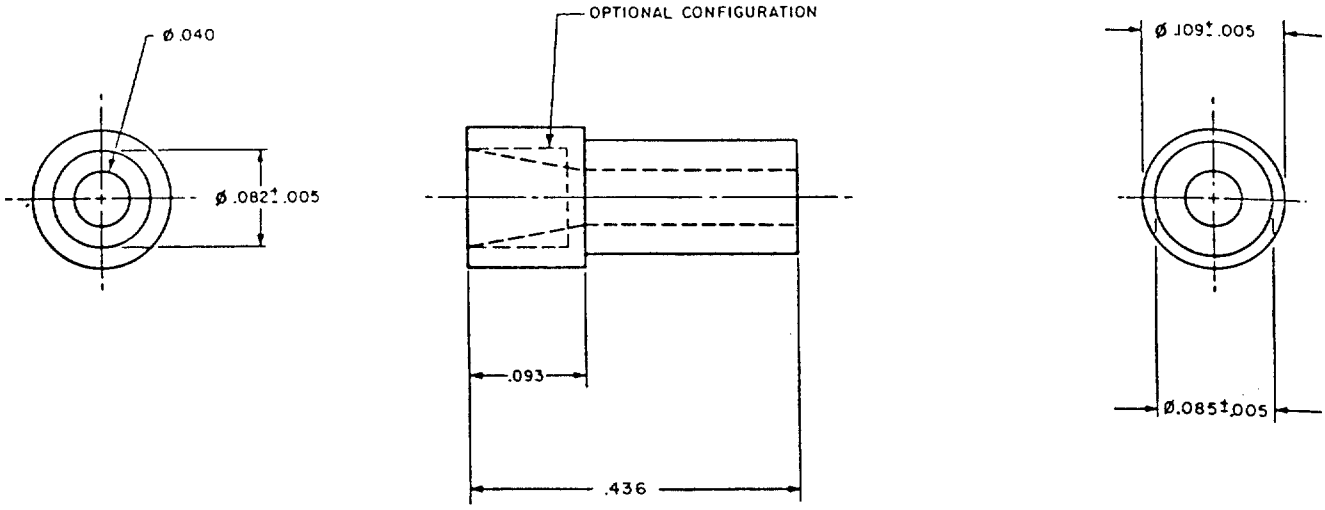



*FIGURE 7. Contact-electrical cord assembly beveled P/N M22442/32-12.

REQUIREMENTS:

1. The contact shall be brass in accordance with QQ-B-626, Alloy 360, 1/2 hard.
2. The contact shall be finished 32 in accordance with ANSI B46.1.62.
3. The contact shall be silver plated in accordance with QQ-S-365 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-14072 or nickel plate.

*NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.015 for two place decimals and ±.005 for three place decimals.
3. Remove all burrs and sharp edges.

*The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.