INCH-POUND
MIL-DTL-22442/32B
5 January 1998
SUPERSEDING
MIL-C-22442/32A
2 August 1991

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, ASSOCIATED PARTS

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

The parts specified on this specification sheet are for use on completed and tested cable assemblies. Qualification of individual parts and components is not required.

APPLICABLE DOCUMENTS:

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-F-14072	-	Finishes for Ground Based Electronic Equipment
MS35206	-	Screw, Machine, Pan Head, Cross-Recessed Carbon Steel, Cadmium Plated, UNC-2A

STANDARDS

FEDERAL

QQ-S-365	-	Silver Plating, Electrodeposited: General Requirement for
QQ-P-416	-	Plating, Cadmium (Electrodeposited)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

NON-GOVERNMENT PUBLICATIONS

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A108 - Standard Specification for Steel Bars, Carbon, Cold-Finish, Standard Quality (DoD Adopted)

ASTM B16 - Standard Specification for Free Cutting Brass Rod, Bar and Shapes for use in Screw machines (DoD Adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa 19103-1187).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B46.1 - Surface Texture (Surface Roughness, Waviness and Lay)

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036).

NATIONAL AEROSPACE STANDARDS

NAS 1397 - Clamp-Loop, Nylon (DoD Adopted)

(Application for copies of National Aerospace Standard (NAS) 1397 should be addressed to: Aerospace Industries of America, 1250 Eye St. NW, Suite 1100, Washington, DC 20005

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

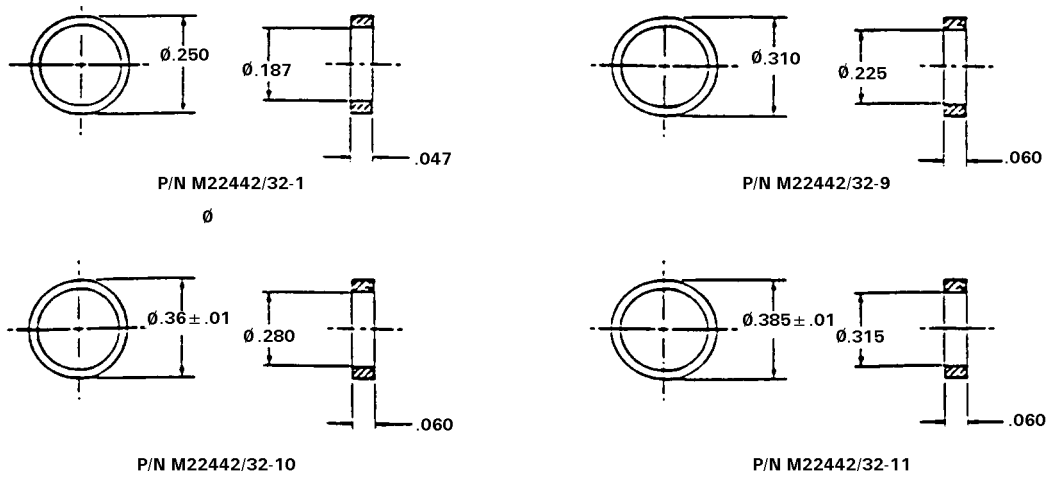


FIGURE 1. Clamp-electrical plug connector.

REQUIREMENTS:

*1. The clamp shall be brass in accordance with ASTM B16, Temper H02 or equivalent (as approved by the qualifying activity).

2. The clamp shall be cadmium plated in accordance with QQ-P-416, Class l, Type II.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.005 for inches and ± 1 degree for angles.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U.S. Air Force Drawing 57Al2700 and U.S. Army Electronic Command Drawing SM-B-430255.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

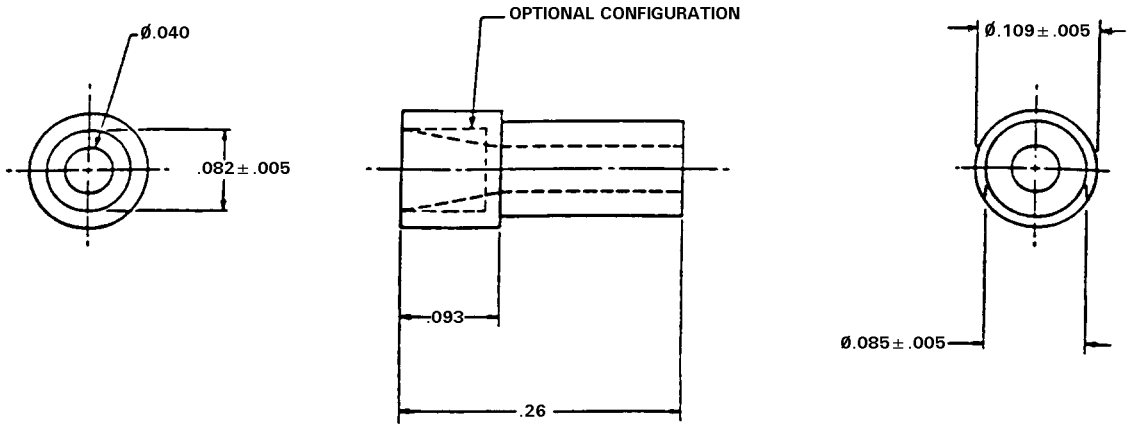


FIGURE 2. Contact-electrical cord assembly beveled P/N M22442/32-2.

REQUIREMENTS:

*l. The contact shall be brass in accordance with ASTM B16, Temper H02 or equivalent (as approved by the qualifying activity).

2. The contact shall be finished 32√ in accordance with ANSI B46.1.62.

3. The contact shall be silver plated in accordance with QQ-S-365 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-l4072 or nickel plate.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.015 for two place decimals and ±.005 for three place decimals.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U.S. Air Force Drawing 55B12776.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

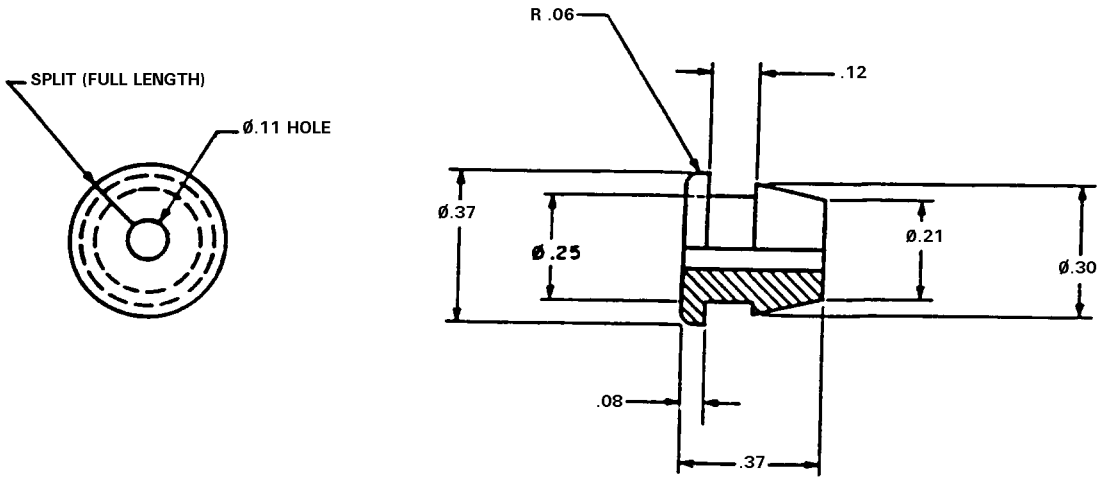


FIGURE 3. Grommet ear cup P/N M22442/32-3.

REQUIREMENTS:

*l. The grommet shall be of 30 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.02.

3. The item described in this specification sheet is the same as Naval Air Systems Command (NASC) Drawing 765AS234.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

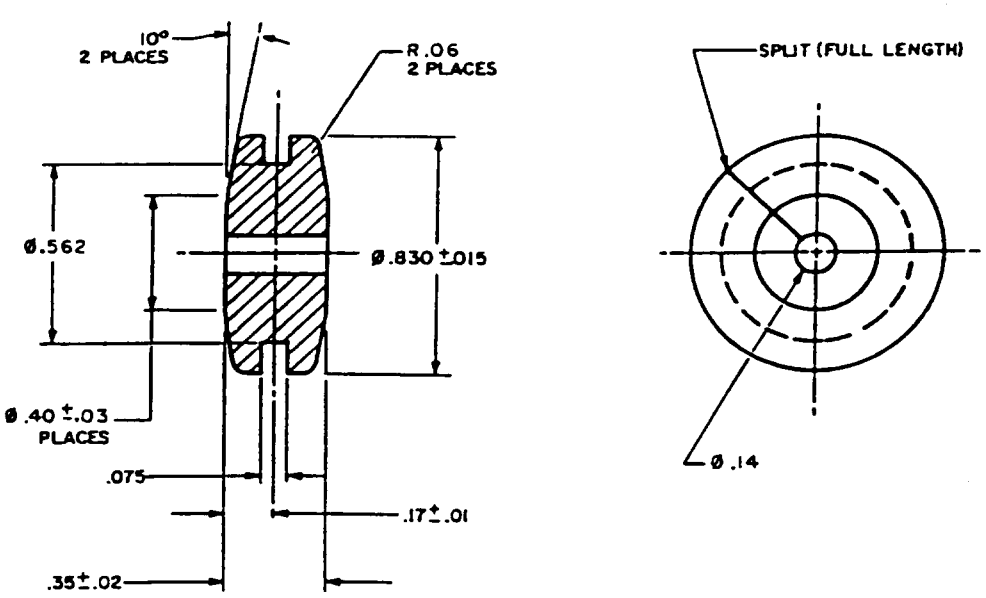


FIGURE 4. Grommet communications cord PIN M22442/32-4.

REQUIREMENTS:

*l. The grommet shall be 30 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.0l for two place decimals, ±.005 for three place decimals and ±2 degrees for angles.

3. The item described in this specification sheet is the same as NASC Drawing 765AS203.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

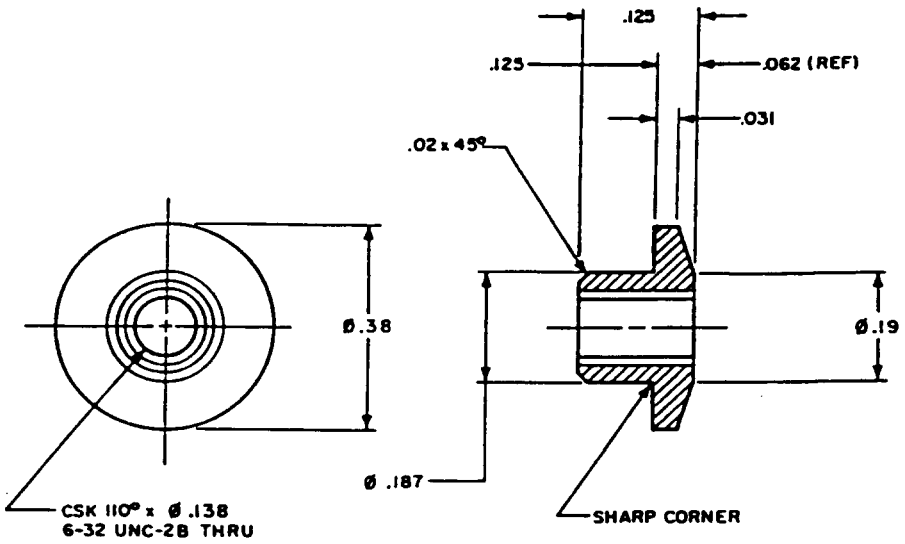


FIGURE 5. Nut, tee, visor P/N M22442/32-5.

REQUIREMENTS:

*l. The nut shall be carbon steel in accordance with ASTM A108, Grade 1117 or equivalent (as approved by the qualifying activity).

2. The nut shall be plated in accordance with QQ-P-4l6 Type II Class l.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.005 for 3 place decimals ±.02 for 2 place decimals ±2 degrees for angles.

3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

Screw Cable Clip
P/N M22442/32-6

REQUIREMENTS:

l. Screw cable clip shall be made in accordance with MS35206-228

Clip Cable (Nylon)
PIN M22442/32-7

REQUIREMENTS:

l. Clip cable shall be made in accordance with NASl397P3CN.

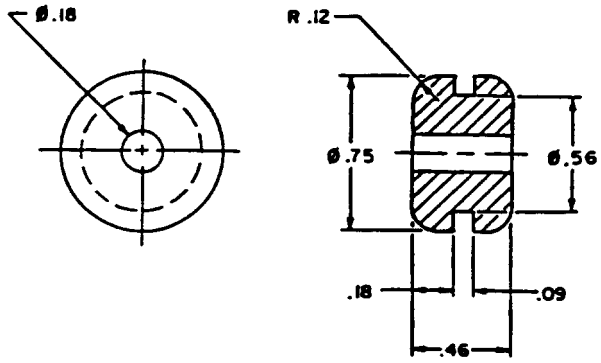


FIGURE 6. Grommet communications cord P/N M22442/32-8.

REQUIREMENTS:

*l. The grommet shall be 30 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.01 for two place decimals.

3. The item described in this specification sheet is the same as U.S. Air Force Drawing 61B2l7l7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

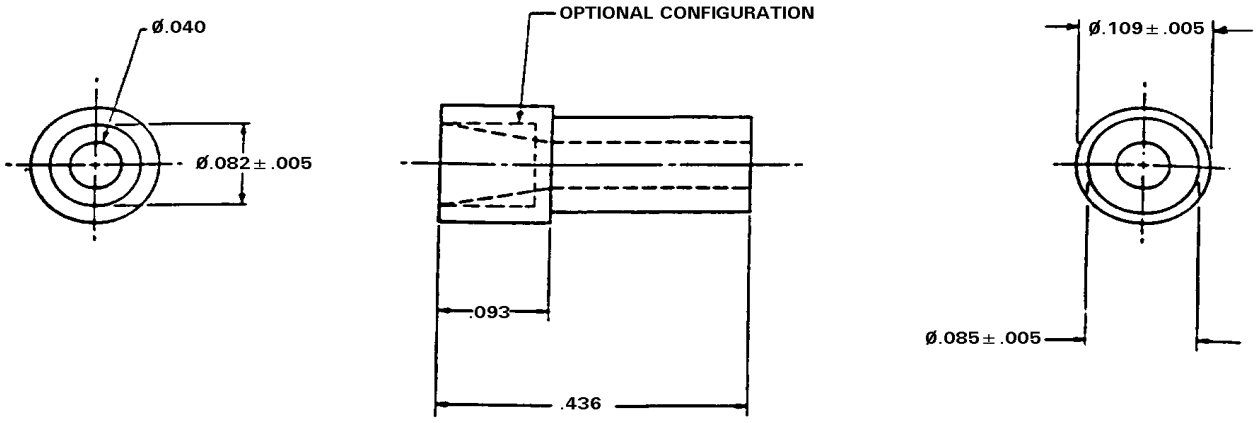


FIGURE 7. Contact-electrical cord assembly beveled P/N M22442/32-12.

REQUIREMENTS:

*l. The contact shall be brass in accordance with ASTM B16, Temper H02 or equivalent (as approved by the qualifying activity).

2. The contact shall be finished 32√ in accordance with ANSI B46.l.62.

3. The contact shall be silver plated in accordance with QQ-S-365 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-l4072 or nickel plate.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.l5 for two place decimals and ±.005 for three place decimal s.

3. Remove all burrs and sharp edges.

Custodians:
Army - CR
Air Force - 85

Preparing activity:
Navy - AS
(Project 5995-0128-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.