INCH-POUND
MIL-DTL-22442/32C
28 February 2005
SUPERSEDING
MIL-DTL-22442/32B
5 January 1998

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, ASSOCIATED PARTS

This specification sheet is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22442.

The parts specified on this specification sheet are for use on completed and tested cable assemblies. Qualification of individual parts and components is not required.

APPLICABLE DOCUMENTS:

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-F-14072 - Finishes for Ground Based Electronic Equipment

NON-GOVERNMENT PUBLICATIONS

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A108 - Standard Specification for Steel Bars, Carbon, Cold-Finish, Standard Quality (Adopted)
ASTM-B16 - Standard Specification for Brass Free Cutting Rod, Bar and Shapes for use in Screw machines (Adopted)
ASTM-B700 - Silver Plating, Electrodeposited: General Requirement for (Adopted)

(Copies of these documents are available on line at www.astm.org or from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

ASME INTERNATIONAL STANDARDS INSTITUTE (ANSI)

ASME B46.1 - Surface Texture (Surface Roughness, Waviness and Lay)

(Copies of these documents are available on line at http://www.asme.org or from ASME INTRENATIOAL, 3 Park Ave., New York, NY 10016-5990 http://www.asme.org).

NATIONAL AEROSPACE STANDARDS

NAS 1397 - Clamp-Loop, Nylon (Adopted)
NASM35206 - Screw, Machine, Pan Head, Cross-Recessed Carbon Steel, Cadmium Plated, UNC-2A (Adopted)

(Copies of these documents are available on line at http://www.aia-aerospace.org or from Aerospace Industries of America, 1250 Eye St. NW, Suite 1200, Washington, DC 20005-3924 http://www.aia-aerospace.org)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-AMS-QQ-P-416 - Plating, Cadmium (Electrodeposited) (Adopted)

(Copies of these documents are available on line at www.sae.org or from Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

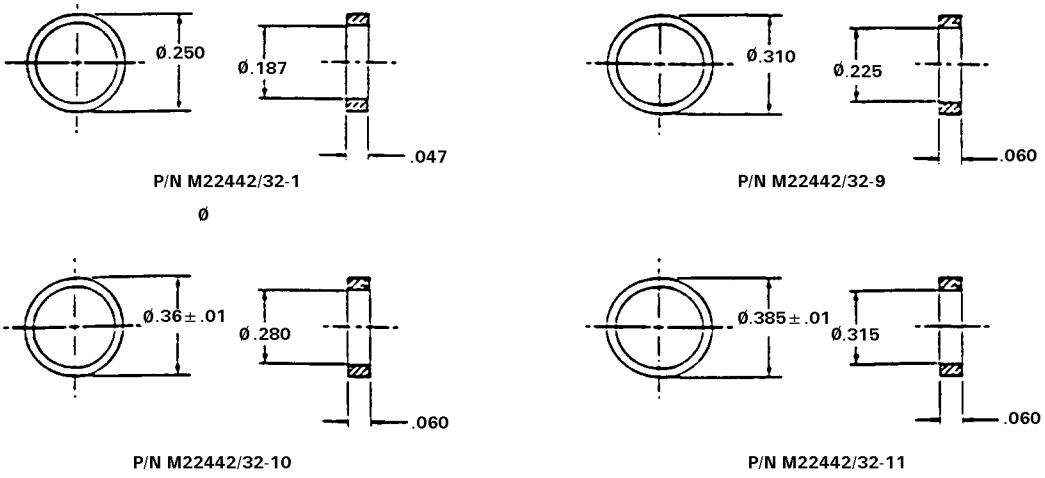


FIGURE 1. Clamp-electrical plug connector.

REQUIREMENTS:

*1. The clamp shall be brass in accordance with ASTM-B16, Temper H02 or equivalent (as approved by the qualifying activity).

2. The clamp shall be cadmium plated in accordance with SAE-AMS-QQ-P-416, Class l, Type II.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.005 for inches and ± 1 degree for angles.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U.S. Air Force Drawing 57Al2700 and U.S. Army Electronic Command Drawing SM-B-430255.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

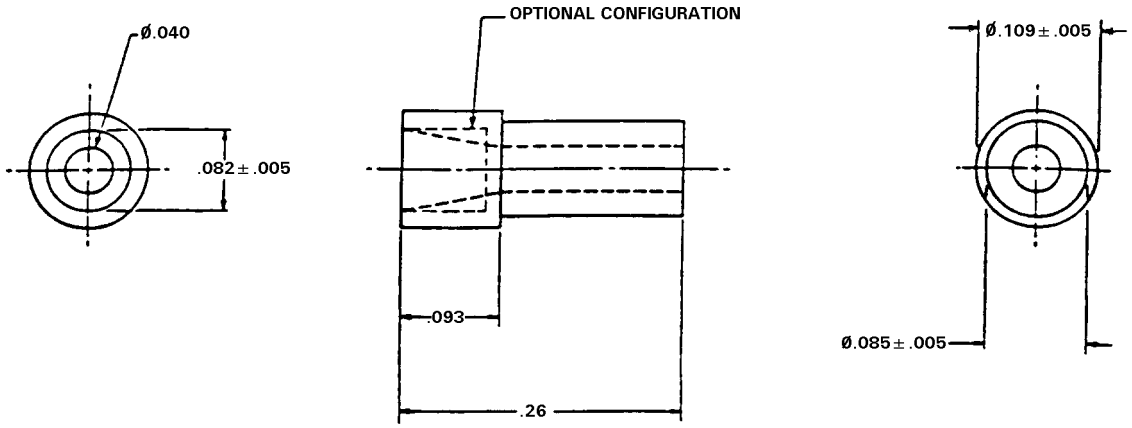


FIGURE 2. Contact-electrical cord assembly beveled PIN M22442/32-2.

REQUIREMENTS:

l. The contact shall be brass in accordance with ASTM-B16, Temper H02 or equivalent (as approved by the qualifying activity).

2. The contact shall be finished 32√ in accordance with ASME B46.1.

3. The contact shall be silver plated in accordance with ASTM-B700 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-l4072 or nickel plate.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.015 for two place decimals and ±.005 for three place decimals.

3. Remove all burrs and sharp edges.

4. The item described in this specification sheet is the same as U.S. Air Force Drawing 55B12776.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

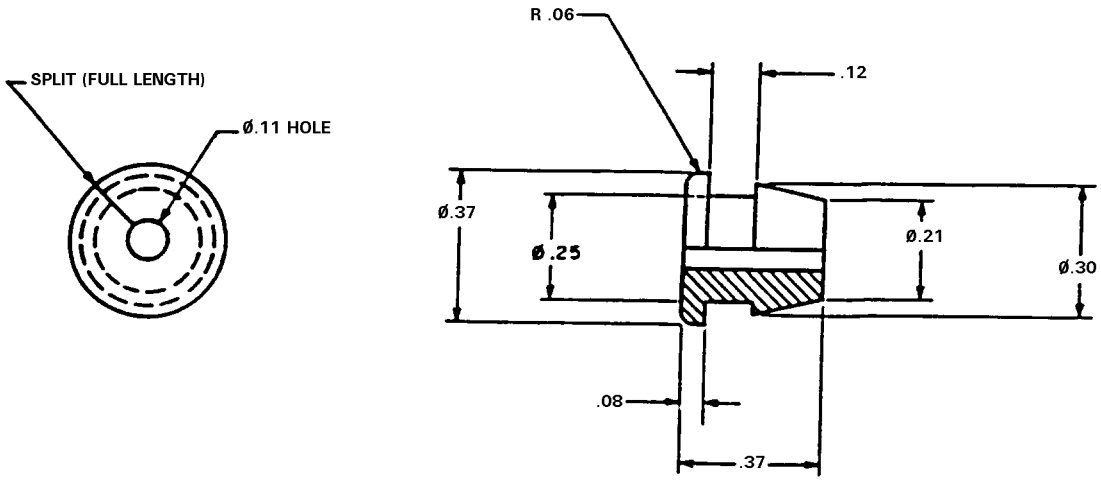


FIGURE 3. Grommet ear cup PIN M22442/32-3.

REQUIREMENTS:

l. The grommet shall be of rubber 30+20-0 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.02.

3. The item described in this specification sheet is the same as Naval Air Systems Command (NASC) Drawing 765AS234.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

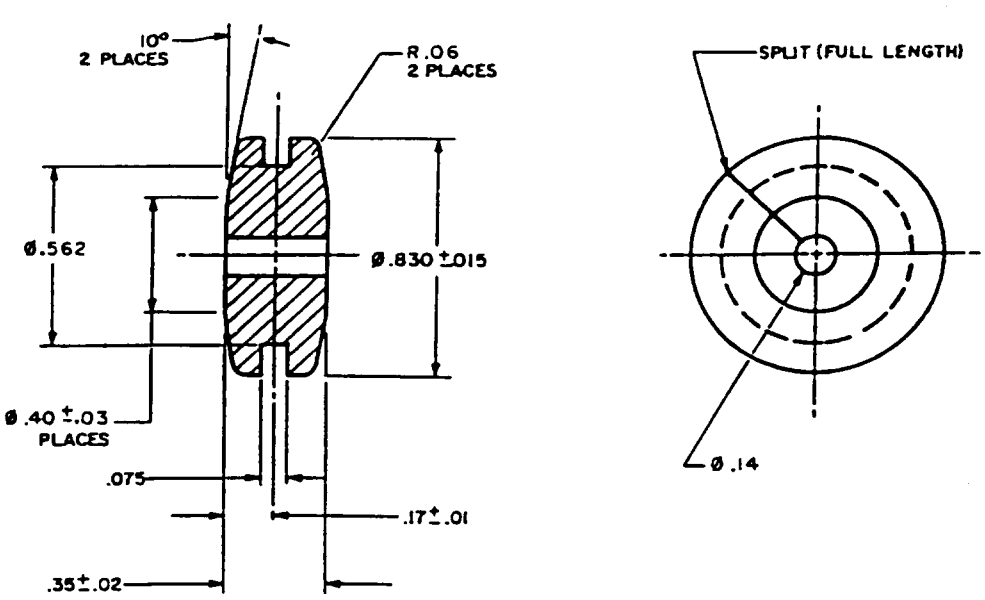


FIGURE 4. Grommet communications cord PIN M22442/32-4.

REQUIREMENTS:

l. The grommet shall be of rubber 30+20-0 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.0l for two place decimals, ±.005 for three place decimals and ±2 degrees for angles.

3. The item described in this specification sheet is the same as NASC Drawing 765AS203.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

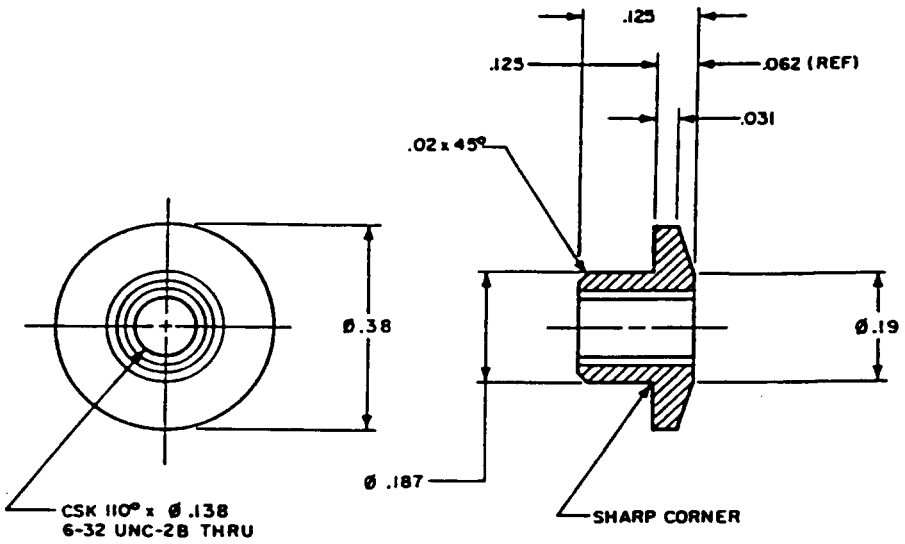


FIGURE 5. Nut, tee, visor PIN M22442/32-5.

REQUIREMENTS:

l. The nut shall be carbon steel in accordance with ASTM-A108, Grade 1117 or equivalent (as approved by the qualifying activity).

2. The nut shall be plated in accordance with SAE-AMS-QQ-P-4l6 Type II Class l.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.005 for 3 place decimals ±.02 for 2 place decimals ±2 degrees for angles.

3. The item described in this specification sheet supersedes Naval Air Systems Command Drawing 765AS202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

Screw, Cable Clip
PIN NASMS22442/32-6

REQUIREMENTS:

l. Screw cable clip shall be made in accordance with NASM35206-228

Clip Cable (Nylon)
PIN M22442/32-7

REQUIREMENTS:

l. Clip cable shall be made in accordance with NASl397P3CN.

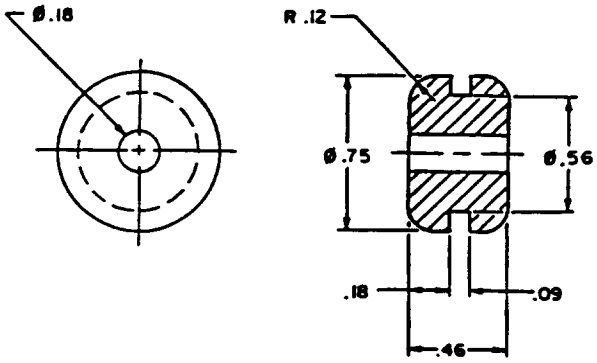


FIGURE 6. Grommet communications cord PIN M22442/32-8.

REQUIREMENTS:

l. The grommet shall be of rubber 30+20-0 durometer hardness, color black.

NOTES:

l. All dimensions are in inches.

2. Tolerances are ±.01 for two place decimals.

3. The item described in this specification sheet is the same as U.S. Air Force Drawing 61B2l7l7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

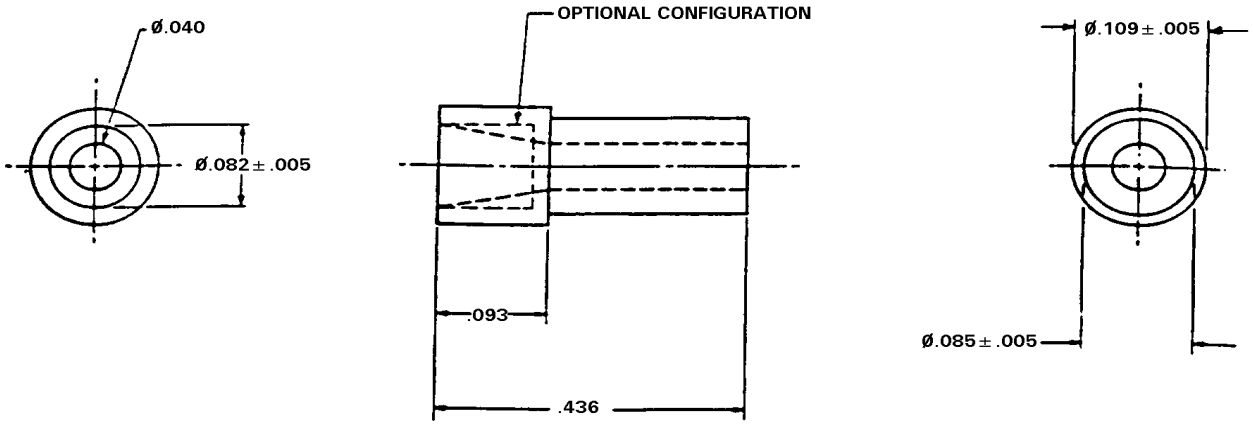


FIGURE 7. Contact-electrical cord assembly beveled PIN M22442/32-12.

REQUIREMENTS:

l. The contact shall be brass in accordance with ASTM-B16, Temper H02 or equivalent (as approved by the qualifying activity).
2. The contact shall be finished 32√ in accordance with ASME-B46.l
3. The contact shall be silver plated in accordance with ASTM-700 Grade B .0003 thick solderable. Optional plating may be M-262 cadmium plate in accordance with MIL-F-l4072 or nickel plate.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the fact the only changes were to update the reference documents.

NOTES:

l. All dimensions are in inches.
2. Tolerances are ±.l5 for two place decimals and ±.005 for three place decimals.
3. Remove all burrs and sharp edges.

Custodians:
Army - CR
Navy –AS
Air Force – 11

Preparing activity:
Navy – AS
(Project 5995-0147)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.