MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO) CX-4707C/AIC

"This specification is approved for use by all Departments and Agencies of the Department of Defense."

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

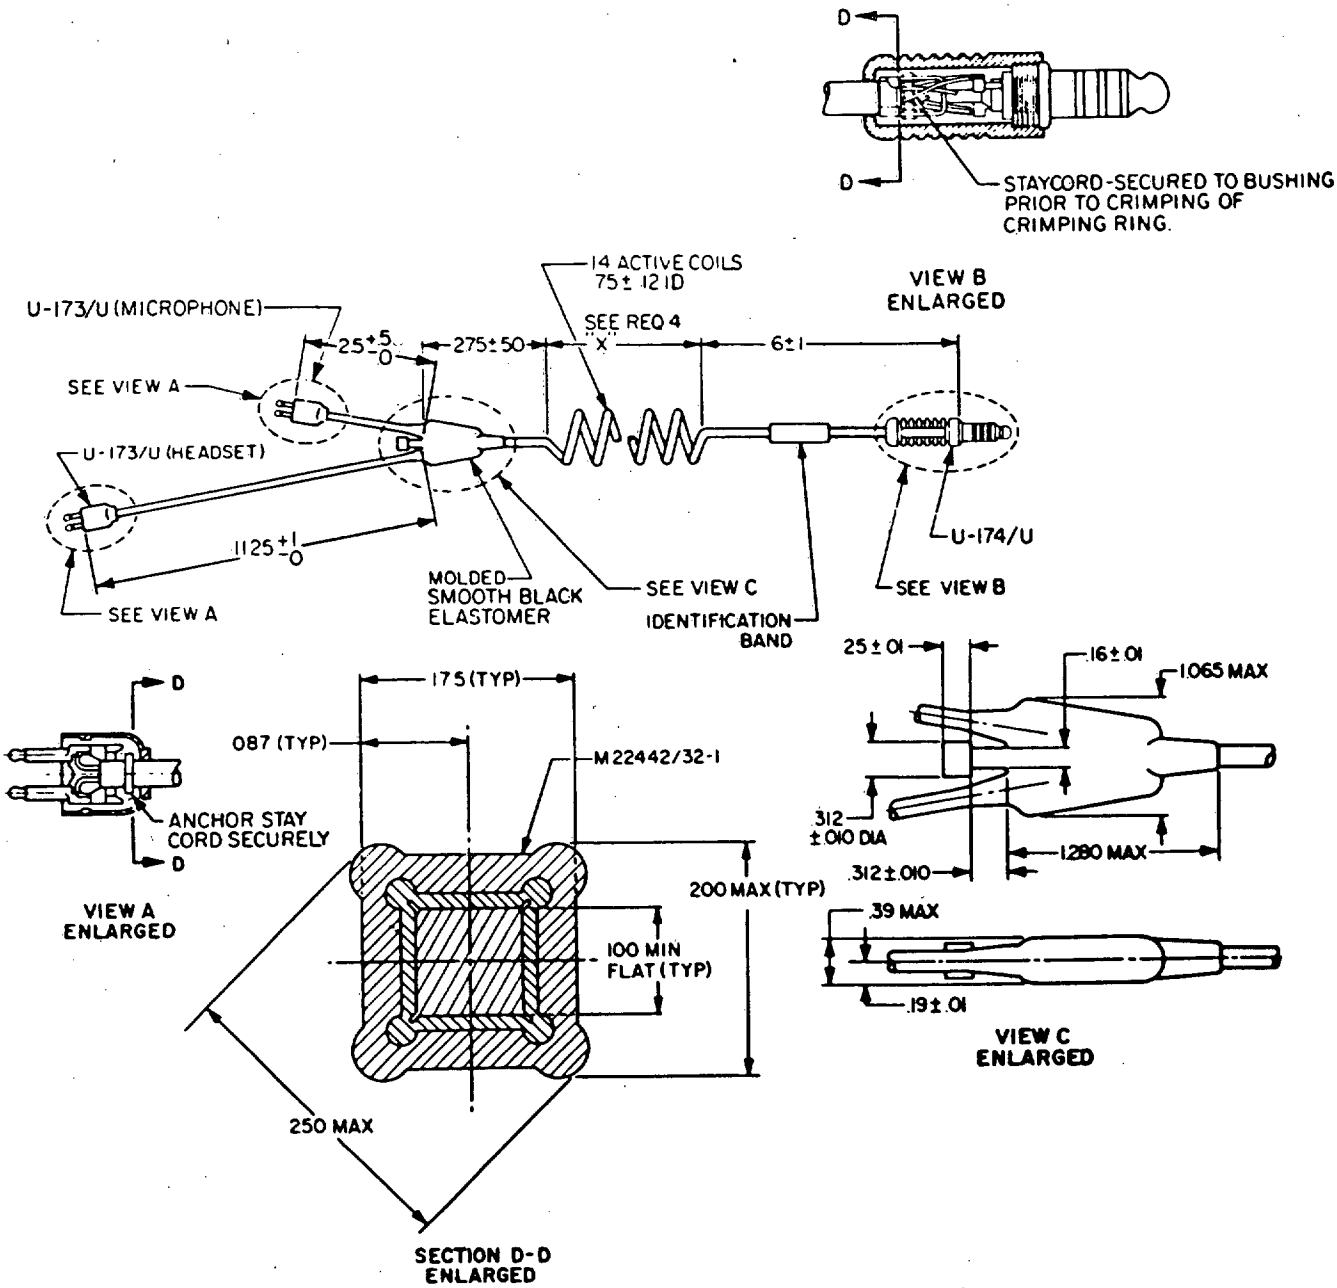


FIGURE 1. CABLE ASSEMBLY CX4707C/AIC

P/N M22442/33-4707 FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

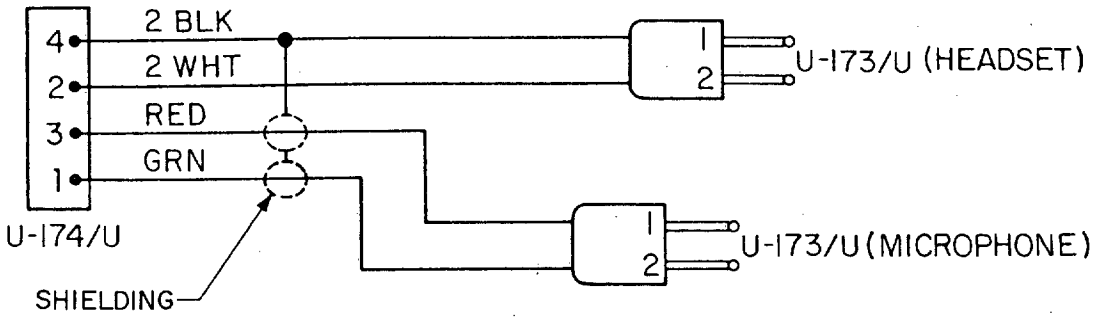


FIGURE 2. CABLE ASSEMBLY CX4707C/AIC
SCHEMATIC DIAGRAM

REQUIREMENTS:

1. The cable cord shall be in accordance with M22442/35-1.

2. The weight of the cable assembly shall not be greater than 5 oz.

3. The stay cord shall be firmly attached to the connectors.

4. The "X" dimension shall be 42.25 ±.50 before coiling and 8.50 ±.50 after coiling.

5. The DC resistance shall be less than 1 ohm between the following contacts:

   (a) Contact 4 of U-174/U and contact 1 of U-173/U.

   (b) Contact 2 of U-174/U and contact 2 of U-173/U.

   (c) Contact 3 of U-174/U and contact 1 of U-173/U.

   (d) Contact 1 of U-174/U and contact 2 of U-173/U.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Tolerances are ±.25 inch unless otherwise specified.
3. This specification supersedes Air Force Drawing 60C12501.

Custodians:
Air Force - 85
Army - CR

Preparing activity:
Navy - AS
Project No. 5995-0102-1

Review Activities:
Air Force - 11
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

TABLE I. CX-4707C/AIC cable assembly inspections.

Inspection	Paragraph		Group I	Group II	Group III
	Require-ments	Test	Qualifi-cation tests	Quality conformance inspection-100%	Sample testing per 4.5.1
GROUP A (ALL SAMPLE UNITS)					
Visual & Mechanical Inspection	3.1,3.4 3.6	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Dielectric Withstanding Voltage	3.5.5	4.6.7	X	X	
Insulation Resistance	3.5.4	4.6.6	X	X	
Pull Test	3.5.7	4.6.9	X		X
DC Resistance	3.5.2	4.6.4	X	X	
GROUP B (4 SAMPLES)					
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Low Temperature Flexibility	3.5.11	4.6.13	X		X
GROUP C (2 SAMPLES)					
Ozone Resistance	3.5.14	4.6.16	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP D (4 SAMPLES)					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.1	4.7	X		
Thermal Shock	3.5.9	4.6.11	X		
Vibration	3.6.1	4.7	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.