MIL-C-22442/33A
14 November 1988
SUPERSEDING
MIL-C-22442/33
22 March 1985

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-4707C/AIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

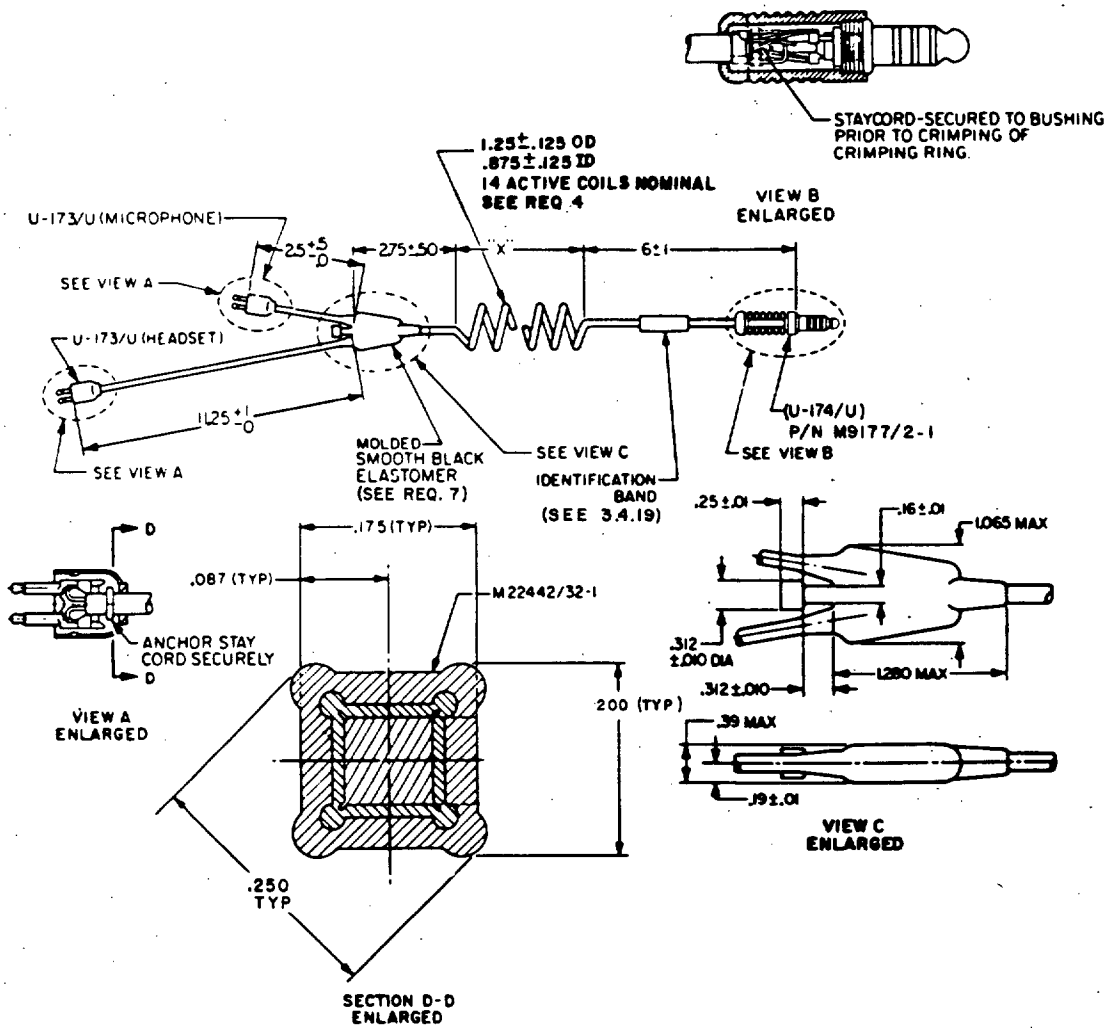


FIGURE 1. Cable assembly CX-4707C/AIC P/N M22442/33-4707.

AMSC N/A
FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

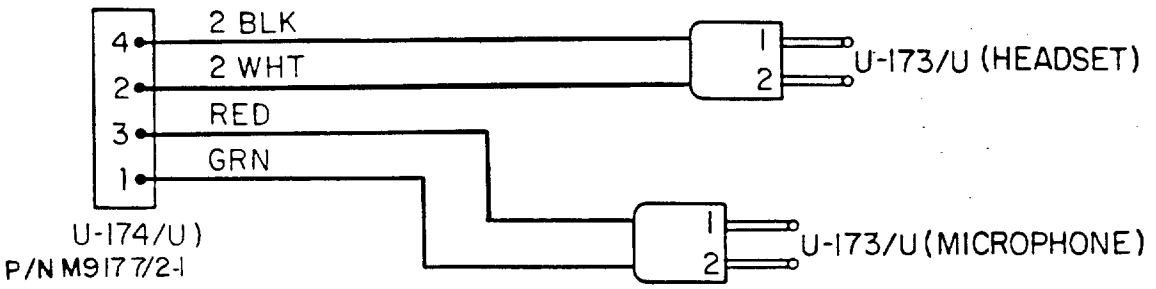


FIGURE 2. Cable assembly CX-4707C/AIC schematic diagram. P/N M22442/33-4707.

APPLICABLE DOCUMENTS:

MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded
MIL-C-9177/2	Connector, Audio Airborne, Plug, Miniature

APPLICABLE DRAWINGS:

AIR FORCE

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

1. The cable (cord) shall be in accordance with M22442/35-1. The shield shall be omitted.
2. The weight of the cable assembly shall not be greater than 5 ounces.
3. The stay cord shall be firmly attached to the connectors.
4. The "X" dimension shall be 42.25 +3 -.5 before coiling.
(A) 5. The DC resistance shall be less than 2 ohms between the following contacts:
   (a) Contact 4 of P/N M9177/2-1 (U-174/U) and contact 1 of U-173/U.
   (b) Contact 2 of P/N M9177/2-1 (U-174/U) and contact 2 of U-173/U.
   (c) Contact 3 of P/N M9177/2-1 (U-174/U) and contact 1 of U-173/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (continued)

(d) Contact 1 of P/N M9177/2-1 (U-174/U) and contact 2 of U-173/U.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

7. Molded Smooth Black Elastomer shall be in accordance with MIL-R-6855, Class II, Type A, GR 60.

(A) 8. The U-173/U connector shall be made in accordance with Air Force drawings 57B12662 and 57B12664.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Air Force Drawing 60C12501.

4. The identification band for the military part number line may read M22442/33-4707.

Custodians:
Air Force - 85
Army - CR

Review Activities:
Air Force - 11
Air Force - 99
DLA - ES

Preparing activity:
Navy - AS
Project No. 5995-0120-16

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:32Z
Check the source to verify that this is the currentversion before use.

(A) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:32Z
Check the source to verify that this is the current version before use.