INCH-POUND
MIL-DTL-22442/33B
5 January 1998
SUPERSEDING
MIL-C-22442/33A
14 November 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY AIRCRAFT AUDIO, CX-4707C/AIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

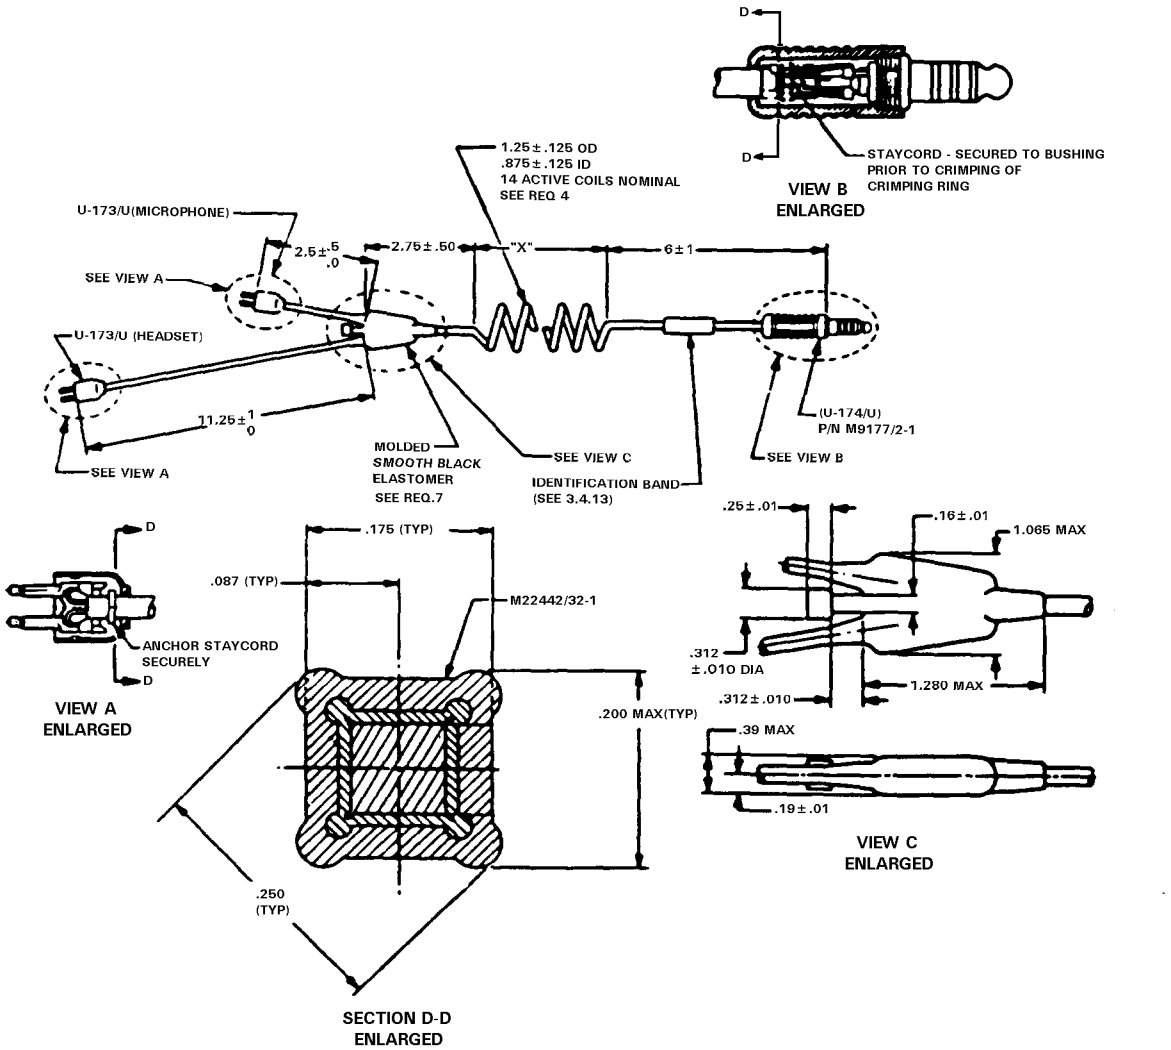


FIGURE 1. Cable assembly CX-4707C/AIC P/N M22442/33-4707.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

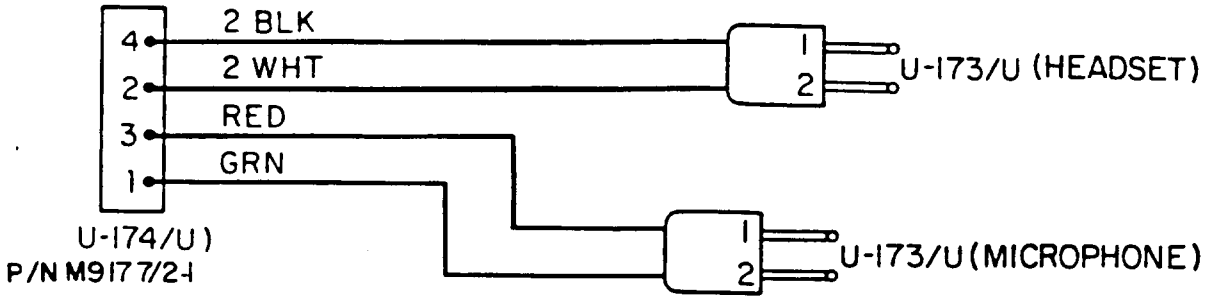


FIGURE 2. Cable assembly CX-4707C/AIC schematic diagram. P/N M22442/33-4707.

APPLICABLE DOCUMENTS:

MIL-C-9l77/2 - Connector, Audio Airborne, Plug, Miniature, 4 Contact

APPLICABLE DRAWINGS:

AIR FORCE

57Bl2662 - Connector, Plug Electrical U-l73/U

57Bl2664 - Tip - Electrical, Plug Connector

REQUIREMENTS:

l. The cable (cord) shall be in accordance with M22442/35-1 except that the shield shall be omitted.

2. The weight of the cable assembly shall not be greater than 5 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. The "X" dimension shall be 42.25 +3 -0.5 before coiling.

5. The DC resistance shall be less than 2 ohms between the following contacts:

(a) Contact 4 of P/N M9177/2-l (U-174/U) and contact 1 of U-173/U.

(b) Contact 2 of P/N M9177/2-1 (U-l74/U) and contact 2 of U-l73/U.

(c) Contact 3 of P/N M9177/2-1 (U-174/U) and contact 1 of U-l73/U.

(d) Contact l of P/N M9177/2-l (U-l74/U) and contact 2 of U-173/U.

6. The U-l73/U connector shall be made in accordance with Air force drawings 57Bl2662 and 57Bl2664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

7. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. This specification supersedes Air force Drawing 60C12501.

4. The identification band for the military part number line may read M22442/33-4707.

Custodians:
Army - CR
Navy - AS
Air force - 85

Review Activities:
Air Force - 1l
Air Force - 99
DLA - CC

Preparing activity:
Navy - AS
(Project No. 5995-0128-30)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Electrostatic and Electro-magnetic Isolation	Req. 8	Req. 8	X		X
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
Durometer Hardness	3.5.10	4.5.12	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.6.1	X		
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)
2/ Steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:32Z
Check the source to verify that this is the current version before use.