INCH-POUND
MIL-DTL-22442/35B
5 January 1998
SUPERSEDING
MIL-C-22442/35A
30 September 1991

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

1. SCOPE

1.1 Scope. This specification covers the minimum requirements for audio frequency cord assemblies with braided and molded elastomer jackets.

1.2 Military part number.

Molded Elastomer Jacket Coil Cord M22442/35-l.

Molded Elastomer Jacket Straight M22442/35-2.

Braided Jacket Straight M22442/35-3 (INACTIVE FOR NEW DESIGN FOR NAVY USE).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-C-572	-	Cords, Yarns and Monofilaments Organic, Synthetic Fiber
MIL-I-3930	-	Insulating and Jacketing Compounds, Electrical (for Cables, Cords and Wires), General Specification for
MIL-C-55668	-	Cord, Electrical; Audio Subminature (Retractile and Straight)

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts

HANDBOOK

MIL-HDBK-454	-	Electronic Equipment, General Guidelines for

(Copies of specifications and standards required by manufactures in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification sheet and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards) the text of this specification sheet takes precedence. Nothing in this specification sheet, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fungus-resistant materials. All materials used in the construction of the cable assemblies should be fungus-resistant as specified in Guideline 4 of MIL-HDBK-454.

3.2 Design and construction.

* 3.2.1 Conductors. The nominal area of the conductors shall be 320 circular mils and the minimum 310 circular mils. Each conductor shall consist of 37 bunch-stranded AWG #40 (0.003145 inch diameter) tinned cadmium-copper wires. The strands shall be twisted to have a left hand lay of .50 inch nominal. The individual strands, before bunching and tinning, shall have a minimum tensile strength of 90,000 to 120,000 pound-force per square inch and have a conductivity grade of at least 80 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

3.2.1.1 Tensile strength. The tensile strength of the conductor strands shall not decrease more than 10 percent after tinning and insulating when tested in accordance with 4.2.

3.2.2 Insulation. The insulation shall be melt-extruded fluorinated ethylene propylene FEP having a minimum wall thickness of .006 inch.

3.2.3 Color code. The conductor insulation for the M22442/35-1 and M22442/35-2 cord assembly shall be colored white, black, red, green, black and white in that order, arranged in accordance with Figure 1. The insulation for the M22442/35-3 cord assembly shall be colored red, green, black, white, and orange, arranged in accordance with Figure 2. The red-green shall be a twisted, shielded pair.

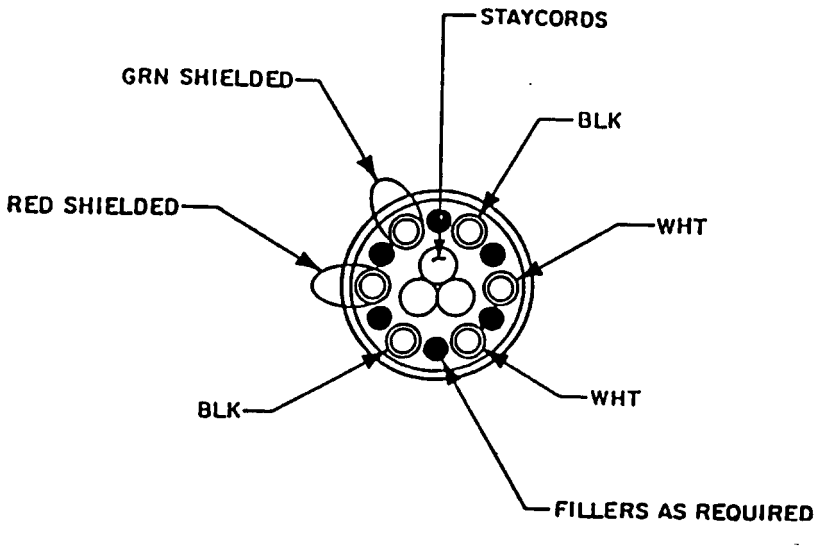

FIGURE 1. Cable construction P/N M22442/35-1 and P/N M22442/35-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

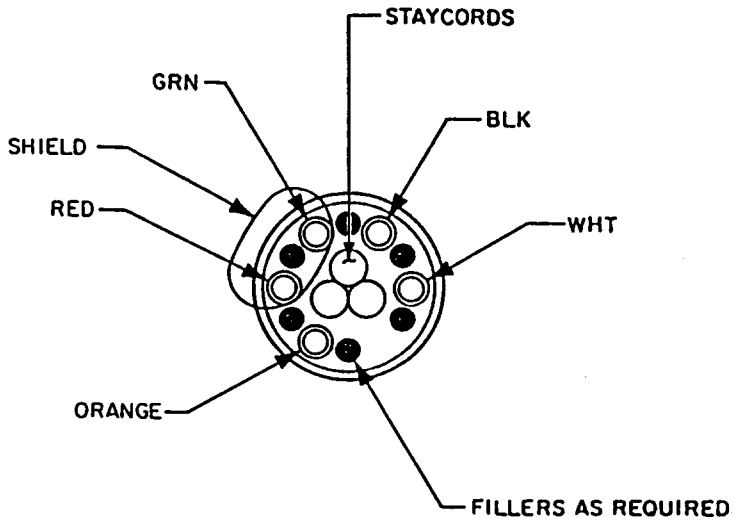

FIGURE 2. Cable construction P/N M22442/35-3.

* 3.2.4 Stay cords. The staycord shall have a minimum breaking strength of 25 pounds and shall not abrade or otherwise damage the insulation when the cord is bent or stretched.

3.2.5 Jacketing materials.

3.2.5.1 Braided. For M22442/35-3, the cable shall be covered with a braided jacket composed of black nylon, 210 denier, 3 ends, 24 carrier, approximately 30 picks per inch.

* 3.2.5.2 Elastomer. The M22442/35-1, and -2, cable shall have a flame retarding jacket molded with a Type JS-l (SBR), JH (EPDM), JN, or JNL compound or a SBR natural blend compound conforming to the performance requirements of MIL-C-55668. Flame retarding polyurethane may also be used. The jacket is to be applied in a continuous extrusion process or molded process directly onto the cable core. The jacket O.D. shall be in the range of .168 to .180 inch diameter with a jacket wall thickness of .016 to .025 inch.

3.2.6 Shield. The shielding will be wrapped shielding, 85-95 percent coverage, using individual strands of size 36 AWG, nickel plated soft drawn copper strands.

* 3.2.7 Cable (cord) construction. Insulated conductors of cable assemblies M22442/35-1, and M22442/35-2 shall have a one-inch nominal right hand lay. The M22442/35-1, M22442/35-2, and M22442/35-3 red and green conductors shall be a shielded twisted pair.

3.2.8 Cable conductor separation. The finished cable may have all conductors within a single outer jacket or may have conductors transition from a single outer jacket to separate outer jackets for individual conductors or groups of conductors as specified in the contract or purchase order. Whether in a single outer jacket or multiple outer jackets all other specification requirements shall be met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

3.3 Performance.

3.3.1 Temperature. The cord shall be flexible and resilient throughout the temperature range of -55 to +85° C and shall not show evidence of cracking or other damage as a result of exposure to the temperature range specified.

* 3.3.2 Flex life. The cord assembly shall have a mean flex life of 25,000 flexes without showing evidence of:

a. Damage to the outside jacket.

b. Damage to the insulation of the individual conductors.

c. Continuity.

3.3.3 Electrical characteristics.

3.3.3.1 Dielectric withstanding voltage. There shall be no evidence of breakdown when the cords are tested as specified in 4.5. Leakage currents shall be recorded and shall not vary more than 30 percent from initial values.

3.3.3.2 Insulation resistance. When tested as specified in 4.6, the insulation resistance shall not be less than 100 megohms.

3.3.4 Continuity. Each conductor in the cord shall be continuous when tested as specified in 4.7 and shall not exceed 4 millivolts drop above that of an equivalent length of the same conductor with a test current of 1.6 amperes (dc).

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Inspections. The inspections listed in Table II of this specification sheet shall be performed on the cordage before assembly into cable assemblies.

4.2 Tensile strength. The wire shall be tested to meet the requirements of 3.3.1.1. One strand selected at random from a conductor shall be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

4.3 Temperature. The unterminated cord shall be placed within a test chamber wherein a temperature of 85° C (185°F) is maintained for a period of four hours. The cord shall be wrapped about a mandrel while at this temperature without damage to the cord jacket or conductor insulation. The diameter of the mandrel shall be the same as the nominal cord diameter. The cord shall be attached to the mandrel and suspended vertically with the lower end weighted sufficiently to keep the specimen taut and to permit wrapping without handling. The cord shall be inspected for damage or deformation and then subjected to the test chamber wherein a temperature of -55° C is maintained. After 20 hours of storage at -55° C, the cord shall be wrapped about the mandrel while at this temperature, in the same manner as it was at +85° C. The cord shall be examined for cracks and any other damage to the jacket or conductor insulation. The cord shall meet the requirements of 3.3.1.

4.4 Flex life. Five samples of the unterminated cord shall be clamped and suspended through holes in a metal bar having a rectangular cross section of .50 inch by .625 inch as described below:

a. The clamping point shall be immediately above the metal bar; the cord clamp shall rest on top of the metal bar.

b. The cord shall be clamped in such a manner that it will not turn in the hole during the flexing test.

c. The length of the through holes in the metal bar shall be .625 inch. The diameters of the through holes shall be 0.005 to 0.010 inch greater than the diameter of the cord samples.

d. The through holes in the metal bar shall incorporate a .125 inch radius at the end from which the cord emerges (bending point).

e. A three-pound weight shall be hung from the cord at a point 8 to 12 inches below the bar to assure that the cord is held in a vertical position.

f. A small low-current drain, a 6-volt lamp, and a suitable power source shall be connected in series to each connected in series to each conductor to indicate electrical continuity (see Figure 3). The metal bar, supported horizontally, shall then be rotated about its longitudinal axis back and forth through an angle of 120 degrees (60 degrees each side of vertical) at a rate of approximately 85 cycles per minute. The arithmetical mean of the flexing cycles of the five samples of the cord before electrical discontinuity occurs shall be taken as the flexing life of the cord (see 3.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

4.5 Dielectric withstanding voltage. Dielectric strength shall be performed in accordance with Method 301 of MIL- STD-202. A potential of 600 volts, 60 Hz, shall be applied for one minute. The potential shall be applied between each conductor and the remaining conductors connected together and to the shield, and metallic shells, if present. The cord shall meet the requirements of 3.4.3.1.

4.6 Insulation resistance. Insulation resistance shall be in accordance with Method 302 of MIL-STD-202, test condition B. The potential shall be applied between each conductor and the remaining conductors connected together and to the shield, and metallic shells, if present. The cord shall meet the requirements of 3.4.3.2.

4.7 Continuity. One and six tenths (1.6) amperes of direct current shall be passed through each conductor of each cord. The voltage drop across the conductor shall not exceed that specified in 3.4.4.

* TABLE II. Cable inspection.

Inspection	Paragraph Requirements	Test	Group I Verification tests	Verification testing per the General specification 1/
Tensile Strength	3.3.1.1	4.2	X	X
Temperature	3.4.1	4.3	X	X
Flex Life	3.4.2	4.4	X	X
Dielectric Withstand Voltage	3.4.3.1	4.5	X	X
Insulation Resistance	3.4.3.2	4.6	X	X
Continuity	3.4.4	4.7	X	X

1/ Objective evidence of compliance is acceptable

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

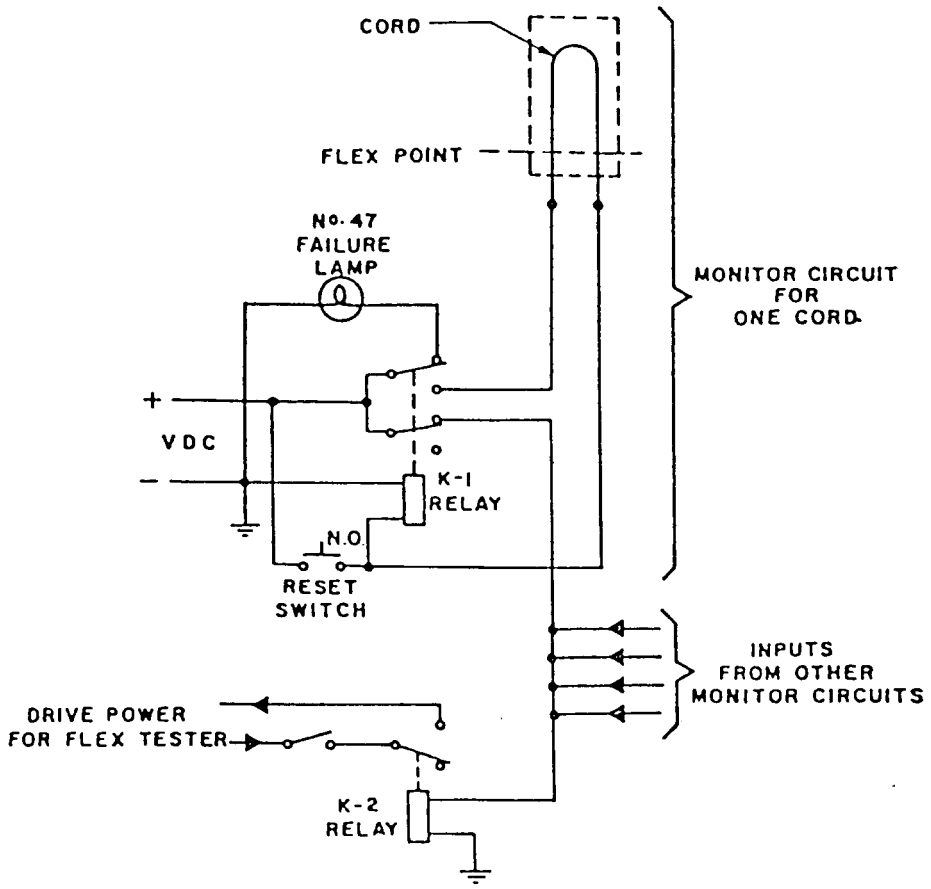

FIGURE 3. Monitor circuit for cord flex tester.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
Navy - AS
(Project 5995-0128-14)

Review activities:
Air Force - 11
Air Force - 99
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.