INCH-POUND
MIL-DTL-22442/35B(AS)
Amendment 1
1 April 2000

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLIES, AIRCRAFT AUDIO, CABLE

This amendment forms a part of MIL-DTL-22442/35B, dated 5 January 1998, and is approved for use by the Naval Air Systems Command, Department of Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

3.2.1: Change second sentence to read: "Each conductor shall consist of 37 concentric or bunch-stranded AWG #40 (0.003145 inch diameter) tinned cadmium-copper wires."

PAGE 5

Add: 3.3.3.3 Electrostatic and electromagnetic isolation. The cord shall meet the electrostatic and electromagnetic isolation requirements listed in Table I when tested in accordance with Figure 3 and 4.7.

Add: Table I

TABLE I. Isolation requirements.

Frequency Hz	Electrostatic isolation (minimum decibels)	Electromagnetic isolation (minimum decibels)
20,000	106	75
10,000	112	81
5,000	118	87

PAGE 5

4.2: Change: "3.3.1.1" to "3.2.1.1"

Add new Page: "Figure 3. Test set-up."

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

PAGE 6

4.4 f: Change: "(see 3.4.4)" to "(see 3.3.4)" in last sentence.

PAGE 7

4.5: Change: "3.4.3.1" to "3.3.3.1" in last sentence.

4.6: Change: "3.4.3.2" to "3.3.3.2" in last sentence.

4.7: Change: "3.4.4" to "3.3.4" in last sentence.

Table II: Add new table II:

TABLE II. Cable Inspection.

Inspection	Paragraph		Group I	Group II
	Requirements	Test	Qualification Tests	Sample testing per 4.4.1 of general specification
Tensile Strength	3.2.1.1	4.2	X	X
Temperature	3.3.1	4.3	X	X
Flex Life	3.3.2	4.4	X	X
Dielectric Withstanding Voltage	3.3.3.1	4.5	X	X
Insulation Resistance	3.3.3.2	4.6	X	X
Electrostatic and Electromagnetic Isolation	3.3.3.3	4.8	X	X
Continuity	3.3.4	4.7	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

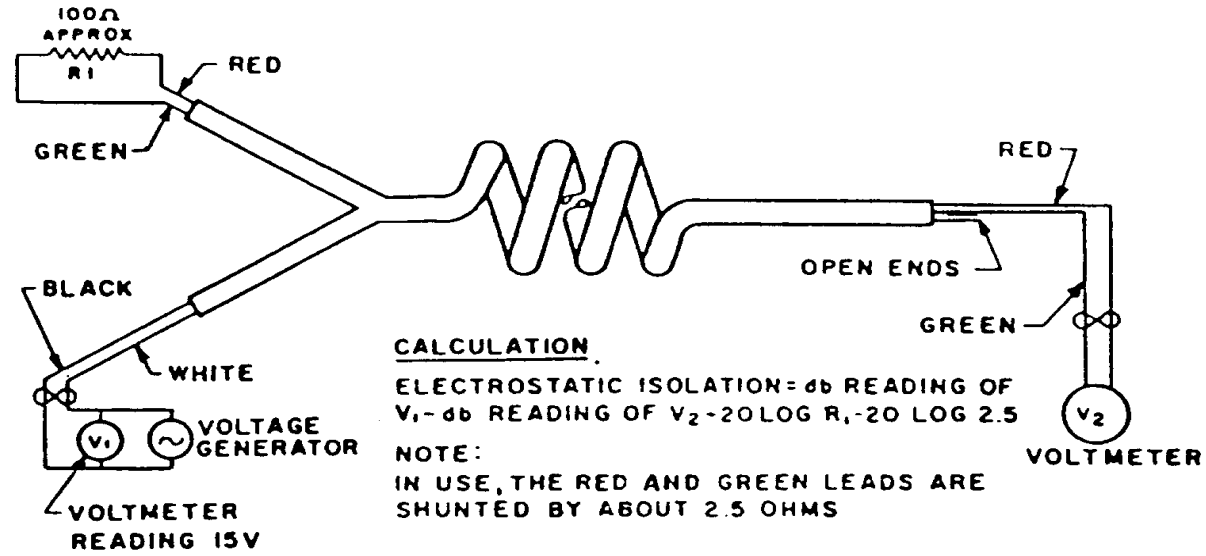

ELECTROSTATIC ISOLATION TEST

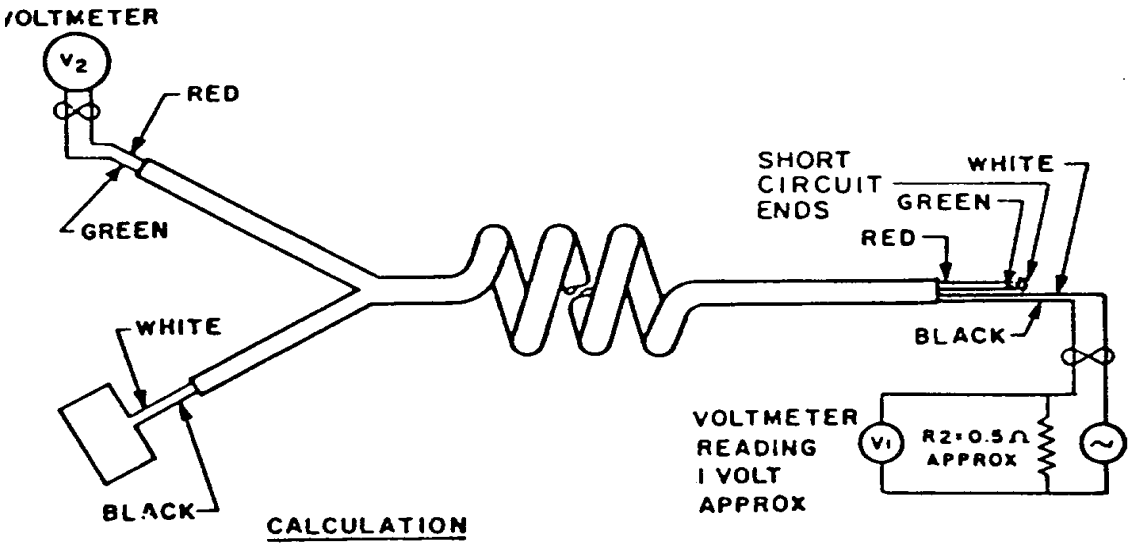

ELECTROMAGNETIC ISOLATION TEST

NOTE: Test setup applies to straight cords also.

FIGURE 3. Test set-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.

PAGE 7

Add new paragraph: "4.8 Electrostatic and electromagnetic isolation. The cord shall be tested for electromagnetic and electromagnetic isolation to determine compliance with 3.3.3.3 and Table I when tested in accordance with figure 3."

PAGE 8

Figure 3: Change: "Figure 3" to "Figure 4"

Preparing activity:
Navy - AS
(Project No. 5995-0140-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:33Z
Check the source to verify that this is the current version before use.