MIL-B-36268(DM)
24 August 1964

MILITARY SPECIFICATION

BEAKERS, LABORATORY, POLYPROPYLENE

1. SCOPE

1.1 Scope. This specification covers polypropylene laboratory beakers, suitable for use in analytical procedures in military laboratory facilities.

1.2 Classification. Beakers shall be of the following sizes, as specified (see 6.1):

Size 1. - 600 milliliters (ml.) nominal capacity.
Size 2. -2000 ml. nominal capacity.
Size 3. -1000 ml. nominal capacity.
Size 4. - 400 ml. nominal capacity.
Size 5. - 250 ml. nominal capacity.
Size 6. - 100 ml. nominal capacity.
Size 7. - 50 ml. nominal capacity.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Boxes, Set-Up, Paperboard.
PPP-B-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547 Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Beakers shall be fabricated of good-quality polypropylene plastic material.

3.1.1 Resistance to heat. The beakers shall be capable of withstanding temperatures up to 300° Fahrenheit (F.), without deforming, blistering, cracking, or being otherwise damaged, impairing their usefulness, when tested as specified in 4.4.1.

3.2 Construction. Beakers shall be made of molded polypropylene, and shall be so constructed that the walls shall be slightly tapered and the bottoms slightly concave, as shown on figure 1. The junction of the sides with the bottom shall be well rounded. The beakers shall be symm .cally made and smoothly finished. The upper edge of the beakers shall flare outward and shall provide a well-defined, dripless, pourout lip. The beakers shall be stable when placed on a smooth, flat surface.

3.3 Identification marking. Each beaker shall be permanently, clearly, and legibly marked with the name or registered trademark of the manufacturer, and the capacity located either at the bottom or side of the beaker. In addition, beakers shall be provided with a round or oval roughened area for marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

MIL-B-36268(DM)
24 August 1964


DARY SPECIFICATION

LABORATORY, POLYPROPYLENE

ion covers polypropylene laboratory beakers,
ocedures in military laboratory facilities.

s shall be of the following sizes, as

1.) nominal capacity.
pacity.
pacity.
pacity.
pacity.
pacity.
pacity.

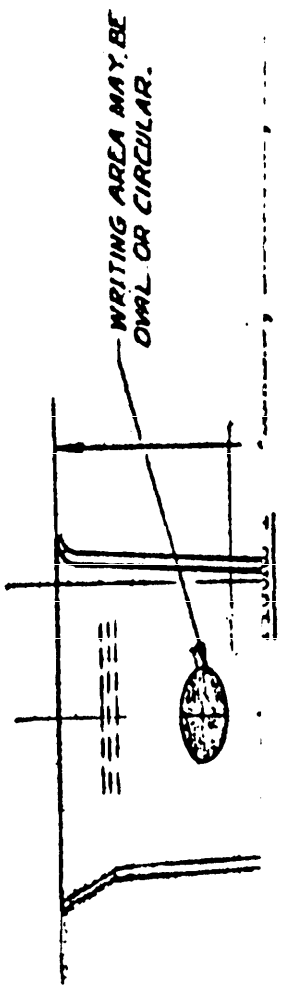

, of the issue in effect on date of
proposal, form a part of this
fied herein:

olding, Paperboard.
ood, Wirebound.
ood, Cleated-Plywood.
ood, Nailed and Lock-Corner.
erboard.
et-Up, Paperboard.
essure-Sensitive Adhesive Paper,
rton Sealing).

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:18Z
Check the source to verify that this is the current version before use.

3.4 Workmanship. Workmanship shall be first class throughout. Beakers shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	2.5
Minor defects	II	4.0
For dimensional examination	S-1	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105.

Component (unit of product)	Characteristic	Requirement	Test procedure	Inspection level	AQL
End item	Heat resistance	3.1.1	4.4.1	S-1	*

*Acceptance number shall be zero.

4.3 Examination. The beakers shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Categories and defects*

Major
101 Beaker not free of cracks.
102 Beaker not free of deformation.
103 Beaker not free of sharp edges or points.
104 Beaker not free of tears.
105 Beaker not free of blisters.
106 Manufacturer's identification and capacity marking missing, illegible, or incomplete.
107 Roughened area for marking not present.
108 Beaker not drip-free when pouring fluids.
109 Beaker not free of rocking or wobbling, when placed on smooth, flat surface.

Minor
201 Beaker not free of feathered edges.
202 Beaker not free of rough or sharp mold marks.
203 Beaker not free of deep scratches and indentations.
204 Finish not smooth.

* Examination shall not be restricted to the classified possible defects listed above.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:18Z
Check the source to verify that this is the current version before use.

4.3.2 Dimensional examination. The beakers shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Heat resistance. Beakers shall be placed in an oven previously heated to, and maintained at, a maximum temperature of 300° F. and allowed to remain for 15 minutes. The beakers shall be carefully removed one at a time in such a manner as to prevent injury to the samples.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One (1) beaker, of the size specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table I. Packaging Quantities

Size	Unit package	Intermediate package	Exterior container
1	1 unit	12 units	144 units
2	1 unit	6 units	36 units
3	1 unit	8 units	96 units
4	1 unit	12 units	144 units
5	1 unit	18 units	216 units
6	1 unit	18 units	432 units
7	1 unit	18 units	864 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be packaged in a carton of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676. Closure shall be adequate to prevent spillage of contents under normal handling. Commercial colors shall be acceptable.

5.1.3.2 Intermediate package shall be a carton of appropriate size constructed in accordance with PPP-B-636. Closure shall be adequate to prevent spillage of contents under normal handling.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; PPP-B-621, table III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix of PPP-B-636. In addition, all seams, including manufacturer's joint, shall be closed by tape conforming to the requirements of PPP-T-76. The tape shall be not less than 2 inches wide. Three strips shall be applied to both top and bottom so that all seams and joints shall be covered their full length. Tape applied over the lengthwise seams shall extend a minimum of 2 inches onto each of the end panels. Tape applied over the end edge seams shall extend a minimum of 2 inches along the side and top, and side and bottom panels.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, table I, using type III, class 1 plywood; or shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3, for class 2 use; PPP-B-621, table I; or PPP-B-636, type CF, Class domestic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129, except that when labels are utilized, waterproofing shall not be required. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129. In addition, the letter "L" shall precede the Federal stock number. One space shall be allowed between the letter "L" and the first digit of the stock number. The terms "Stock number" or "FSN" shall not be indicated.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification
(b) Size required (see 1.2).
(c) Selection of applicable level of packing (see 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION	BEAKERS, LABORATORY, Polypropylene	MIL-B-36268(DM) 24 August 1964

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4063, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:18Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT IN THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

DEFENSE SUPPLY AGENCY
DEFENSE MEDICAL SUPPLY CENTER
3RD AVENUE AND 29TH STREET
BROOKLYN, N. Y., 11232

OFFICIAL BUSINESS

DEFENSE SUPPLY AGENCY
DEFENSE MEDICAL SUPPLY CENTER
ATTN: DIRECTORATE OF TECHNICAL OPERATIONS (CODE TMS)
3RD AVENUE AND 29TH STREET
BROOKLYN, N. Y., 11232

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:18Z
Check the source to verify that this is the current version before use.