MIL-F-36240A
11 January 1972
SUPERSEDING
MIL-F-36240(DM)
17 July 1964

MILITARY SPECIFICATION

# FRAME, CLOTH BASKET

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 This specification covers a circular, corrosion-resisting steel frame, equipped with casters, suitable for use with a cloth bag, to hold and convey soiled linens

## 2 APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of the specification to the extent specified herein

SPECIFICATIONS

Federal

| | |
|---|---|
| FF-C-77A | Casters, Institutional Duty. |
| PPP-B-585 | Boxes, Wood, Wirebound. |
| PPP-B-601 | Boxes, Wood, Cleated-Plywood. |
| PPP-B-621 | Boxes, Wood, Nailed and Lock-Corner. |
| PPP-B-636 | Box, Fiberboard |

Military

| | |
|---|---|
| [illegible] | [illegible] |
| | Water-Vaporproof or Waterproof, Flexible. |

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

| | |
|---|---|
| FED-STD-66 | Steel, Chemical Composition and Hardenability. |
| FED-STD-151 | Metals; Test Methods |

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | Marking for Shipment and Storage. |

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer )

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA No. 56 Code for the Use of Flammable Anesthetics.

(Application for copies should be addressed to the National Fire Protection Association, 60 Batterymarch Street, Boston, Mass. 02110)

3 REQUIREMENTS

3.1 Material.

3.1 1 Tubing Tubing shall be of corrosion-resisting steel conforming to AISI 302 or 304 of FED-STD-66, and shall be tested as specified in 4.4 1.

3.2 Construction Frame shall consist of three uprights, a circular rim at the top, and a "Y" brace at the bottom Each upright shall be mounted on a caster. Frame shall be fabricated from 1-inch-outside-diameter by 0 065-inch-thick, No 16, Birmingham Wire gage, corrosion-resisting steel tubing A circular ring shall be constructed of one piece of tubing, butt welded to form a complete circle, 22 inches + 0 - 1/2 inch in inside diameter Three tubular uprights, equally spaced, shall be welded to the ring to form legs for the frame The legs shall be joined at the bottom by a "Y" brace with all joints completely welded The frame shall measure 31 inches ± 1/2 inch from the top of the circular ring to the top of the "Y" brace, and shall measure 37 inches ± 1/2 inch in overall height, including casters Frame shall be as shown in figure 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

3.3 Casters. Casters shall be electrically conductive and conform to the requirements for three inch size, swivel Type II, Class B, Style C, Mounting N, of FF-C-77A. The frame with the casters in place shall meet the requirements for "Reduction of Electrostatic Hazard-Furniture" as specified in section 253 of NFPA No 56 when tested as specified in 4.4.2 Casters shall be zinc or cadmium plated.

3.4 Finish. The frame shall have a No. 4 finish (200 emery).

3 5 Identification marking Each unit shall be legibly and permanently marked in an inconspicuous location with the manufacturer's name or registered trademark. Marking secured by adhesive shall not be acceptable

3.6 Workmanship Workmanship shall be first class throughout. The frames shall be free from defects which detract from their appearance or may impair their serviceability.

3.6.1 Welding. Welding rod shall be of material similar in composition to the welded members. Welds shall be thorough, nonporous, and free of pits, cracks, and other imperfections Welding shall be continuous on all contact surfaces and shall be ground smooth and finished to blend with adjacent surfaces so that no joint is visible after finishing Grinding and polishing shall not reduce the outside diameter of the tubing at the junction points by more than 0.020 inch.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4 1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government [illegible] time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, and auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the material and components, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The Certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the FSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Classification of Inspections.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and Table I.

Table I. Sampling for Examination

| | Inspection level | AQL (defects per hundred units) |
|---|---|---|
| For visual examination | | |
| Major defects | S-4 | 1.0 |
| Minor defects | S-4 | 4.0 |
| For dimensional examination | S-3 | 2.5 |

4.2.2 For tests Sampling for tests shall be conducted in accordance with MIL-STD-105 for an Inspection level of S-2 and an AQL of zero.

4.2.3 Raw materials. Four ounces of each lot of metal used in the construction of the frame shall be selected for chemical analysis

4.3 Examination The frames shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects as shown in Table II.

Table II Categories and defects*

| Categories | Defects |
|---|---|
| Major | |
| 101 | Surface not free of burrs and sharp edges. |
| 102 | Component parts not properly and symmetrically aligned. |
| 103 | Welds not continuous and uniform. |
| 104 | Welds not free of cracks, pits, burns, porous areas. |
| 105 | Casters do not fit legs properly. |
| 106 | Casters not as specified. |
| 107 | Material not as specified. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

Table II. Categories and defects* (cont'd.)

| Categories | Defects |
|---|---|
| Minor | |
| 201 | Surface not free from scratches, foreign substance, and weld spatter. |
| 202 | Casters do not swivel, not free moving |
| 203 | Finish not as specified |
| 204 | Identification marking not present, incomplete, or not legible. |
| 205 | Welded joints not free form grinding undercuts. |
| 206 | Welded joints not ground smooth to blend with adjacent surfaces. |

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination The frames shall be examined for defects in dimensions Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical composition Tests for chemical analysis shall be conducted in accordance with method 111.1 or 112.1 of FED-STD-151

4.4.2 Electrical conductivity The assembled frame, complete with rubber casters shall be tested using the equipment described in NFPA No. 56

5. PREPARATION FOR DELIVERY

5.1 Packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue One frame, as specified, constitutes one unit of issue.

5.1.2 Level A

5.1.2.1 Unit preparation The casters shall be removed and packaged in a waterproof bag of suitable size and design. The unit shall be protected by a wrapping of kraft paper or other suitable material and secured. Cushioning material shall be interposed between point of contact of interior of the container and the unit The bag containing the casters shall be secured to the unit Work shall be accomplished in such a manner as to insure against marring, scratching, or damage to the unit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. Each unit shall be prepared for shipment which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type, PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.2 Level B.

5.2.2.1 Exterior container Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129 When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129

6. NOTES

6.1 Intended use. To hold and convey cloth bag containing soiled linen, in hospital housekeeping procedures.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification does not include all types, classes, grades or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types which are normally procured to meet Military requirements.

6.4 This specification covers the following item appearing in the Federal Supply catalog:

| FSN | Item Identification |
|---|---|
| 7240-776-0325 | Frame, Cloth Basket, Corrosion-Resisting Steel |

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 7240-0171

Review Activities
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation [illegible] in the current DODISS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

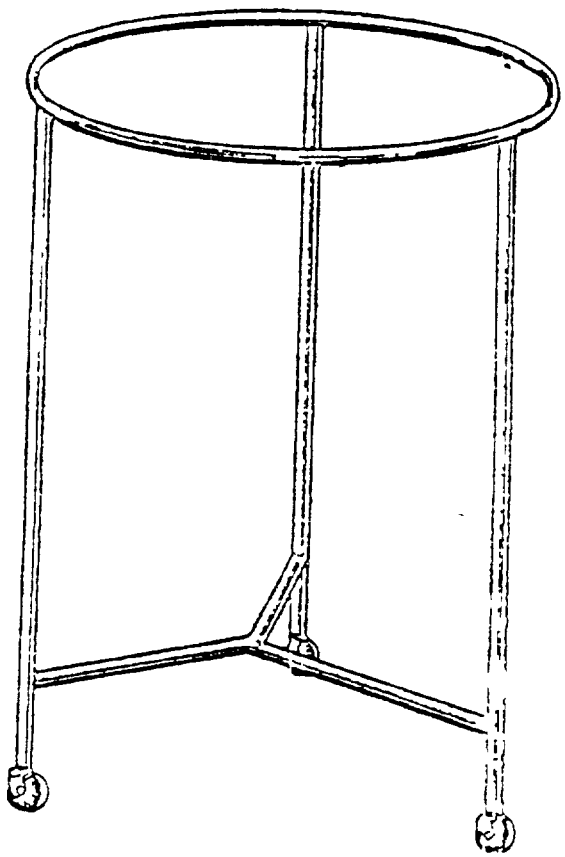


**Figure I.**

FRAME, CLOTH BASKET



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document (s) or serve to amend contractual requirements

SPECIFICATION

MIL-P-36240A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO (If "Yes", in what way?)

4 REMARKS (Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional)

DATE

DD FORM 1 JAN 80 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.

**CAUTION**

**NOTICE TO BIDDERS/OFFERORS**

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA PA 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS DEFENSE PERSONNEL SUPPORT CENTER
ATTN DIRECTORATE OF MEDICAL MATERIEL, CODE ATS
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

Fold

DPSC FORM 2418
MAR 68

EDITION AUG 66, WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:16Z
Check the source to verify that this is the current version before use.