MIL-P-36257A (DSA-DM)
10 August 1970
Superseding
MIL-P-36257 (DM)
7 August 1964

MILITARY SPECIFICATION

PAIL, PLASTIC, 14 QUARTS

This limited coordination Military Specification has been prepared by the Defense Personnel Support Center based upon currently available technical information, but has not been approved for promulgation as a coordinated revision of Military Specification MIL-P-36527 (DM). It is subject to modification. However, pending its promulgation as a coordinated Military Specification, it may be used in procurement.

## 1. SCOPE

1.1 Scope. This specification covers one type of plastic pail suitable for use in the storage of anatomical specimens.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

| | |
|---|---|
| PPP-B-585 | Boxes, Wood, Wirebound. |
| PPP-B-601 | Boxes, Wood, Cleated-Plywood. |
| PPP-B-621 | Boxes, Wood, Nailed and Lock-Corner. |
| PPP-B-636 | Box, Fiberboard. |

Military

| | |
|---|---|
| MIL-L-10547 | Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible. |

FSC 7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | Marking for Shipment and Storage. |

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Other publications.

AMERICAN SOCIETY FOR TESTING MATERIALS (ASTM)

| | |
|---|---|
| ASTM Designation D 792 | Specific Gravity and Density of Plastics by Displacement. |
| ASTM Designation D 1238 | Tentative Method of Measuring Flow Rates of Thermoplastics by Extrusion Plastometer. |
| ASTM Designation D 1505 | Tentative Method of Test for Density of Plastics by the Density-Gradient Technique. |

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia 3, Pa.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Plastic. The pail body, cover, and bail handle shall be made from virgin, low-density, general-purpose polyethylene or polypropylene. When polyethylene is used, it shall have the following properties, when tested as specified in 4.4.1:

| | Melt index | Density |
|---|---|---|
| Pail body and bail handle | 1.8 - 2.2 | 0.91 - 0.93 |
| Cover | 8.5 - 11.0 | 0.907 - 0.927 |

When polypropylene is used, it shall have a melt index of 11-13 and a density of 0.90 - 0.91, when tested as specified in 4.4.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

* 3.1.1.1 Color. Color of the plastic lid shall be white and the plastic body shall be a uniform soft pastel yellow.

* 3.1.2 Steel wire. The bail shall be made from carbon or alloy steel wire, not less than 0.117 inch thick (No. 11 Washburn & Moen gage), zinc, nickel, or chromium-over copper-over nickel, plated.

* 3.2 Design and construction. Shall be as shown in figure 1 and as hereinafter specified. The pail shall consist of a body and a tight fitting cover. The bail shall be fitted with a suitable handle. The pail shall have a capacity of not less than 14 quarts of fluid. Measurements of the pail shall be as shown in the figure. Thickness of the pail body and cover shall not be less than 0.050 inch.

* 3.3 Identification marking. Each pail shall bear the name or registered trademark of the manufacturer permanently marked thereon. Marking secured by adhesives shall not be used.

* 3.4 Workmanship. Workmanship shall be first class throughout. Pails, bails, and handles, shall be free from defects which detract from their appearance, or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, or auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. When available, certificates of quality supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with Standard MIL-STD-105, as shown in Table I.

Table I.

| | Inspection level | AQL (defects per hundred units |
|---|---|---|
| For visual examination | | |
| Major Defects | S-4 | 1.0 |
| Total (major and minor combined) defects | S-4 | 4.0 |
| For dimensional examination ** | S-4 | 2.5 |

** Does not include material thickness.

4.2.2 For tests. Sampling for tests shall be conducted in accordance with Standard MIL-STD-105, as shown in Table II.

Table II.

| Component (unit of product) | Characteristic | Requirement | Test procedure | No. of samples from each lot |
|---|---|---|---|---|
| Polyethylene resin (pail body cover and bail handle) | Melt index<br>Density | 3.1.1<br>3.1.1 | 4.4.1<br>4.4.1 | 3* |
| Polypropylene | Melt index<br>Density | 3.1.1<br>3.1.1 | 4.4.1<br>4.4.1 | 3* |

* The results of the three samples tested from each lot of resin shall fall within the specification requirements.

4.2.3 Raw materials. Three four-ounce samples of each lot of resin used in the manufacture of the pail bodies, and three four-ounce samples of resin used in the manufacture of the covers, shall be selected for physical testing. The samples shall be selected at random from each lot of resin.

4.3 Examination. The pails shall be examined to determine compliance with all requirements contained in this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects as shown in Table III.

Table III. Categories and defects*

| Categories | Defects |
|---|---|
| Major | |
| 101 | Pail not complete with all component parts. |
| 102 | Bail not assembled to pail. |
| 103 | Cover does not fit body of pail snugly. |
| 104 | Cover cannot be removed, or excessively difficult to remove. |
| 105 | Body and cover not free of cracks, tears, and ruptures. |
| 106 | Body and cover not free of thin areas. |
| 107 | Color not uniform. |
| 108 | Plating on bail missing. |
| Minor | |
| 201 | Mold flash not removed from plastic parts. |
| 202 | Knockout areas not of same thickness as adjacent areas (check pail body and cover). |
| 203 | Plated bail not free of chips, blisters, and unplated areas. |
| 204 | Identification marking missing, not permanent, or illegible. |
| 205 | Mold gage marks not neatly finished. |

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The pails shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Melt index and density. The melt index and denisty shall be determined in accordance with the following test methods:



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

| Property | Test Method |
|---|---|
| Melt index | ASTM Designation D 1238, condition E |
| Density | ASTM Designation D 1505 for polyethylene |
| | ASTM Designation D 792 for polypropylene |

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One pail and cover, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

| Unit package | Intermediate package | Exterior container |
|---|---|---|
| 1 unit | Not required | 6 units |

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent spilling of contents under normal handling.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed in accordance with paragraph 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

6. NOTES

* 6.1 Intended use. Storage of anatomical specimens in Formalin and other preservative or fixative solutions in military hospitals and medical facilities.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable levels of packing (see 5.1 and 5.2).

* 6.3 This specification covers the following item appearing in the Federal Supply Catalog.

| Item | FSN |
|---|---|
| Pail, Utility, Plastic, 14 quart | 7240-023-8570 |

* 6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirement of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.5 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

Custodians
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 7240-0168

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.

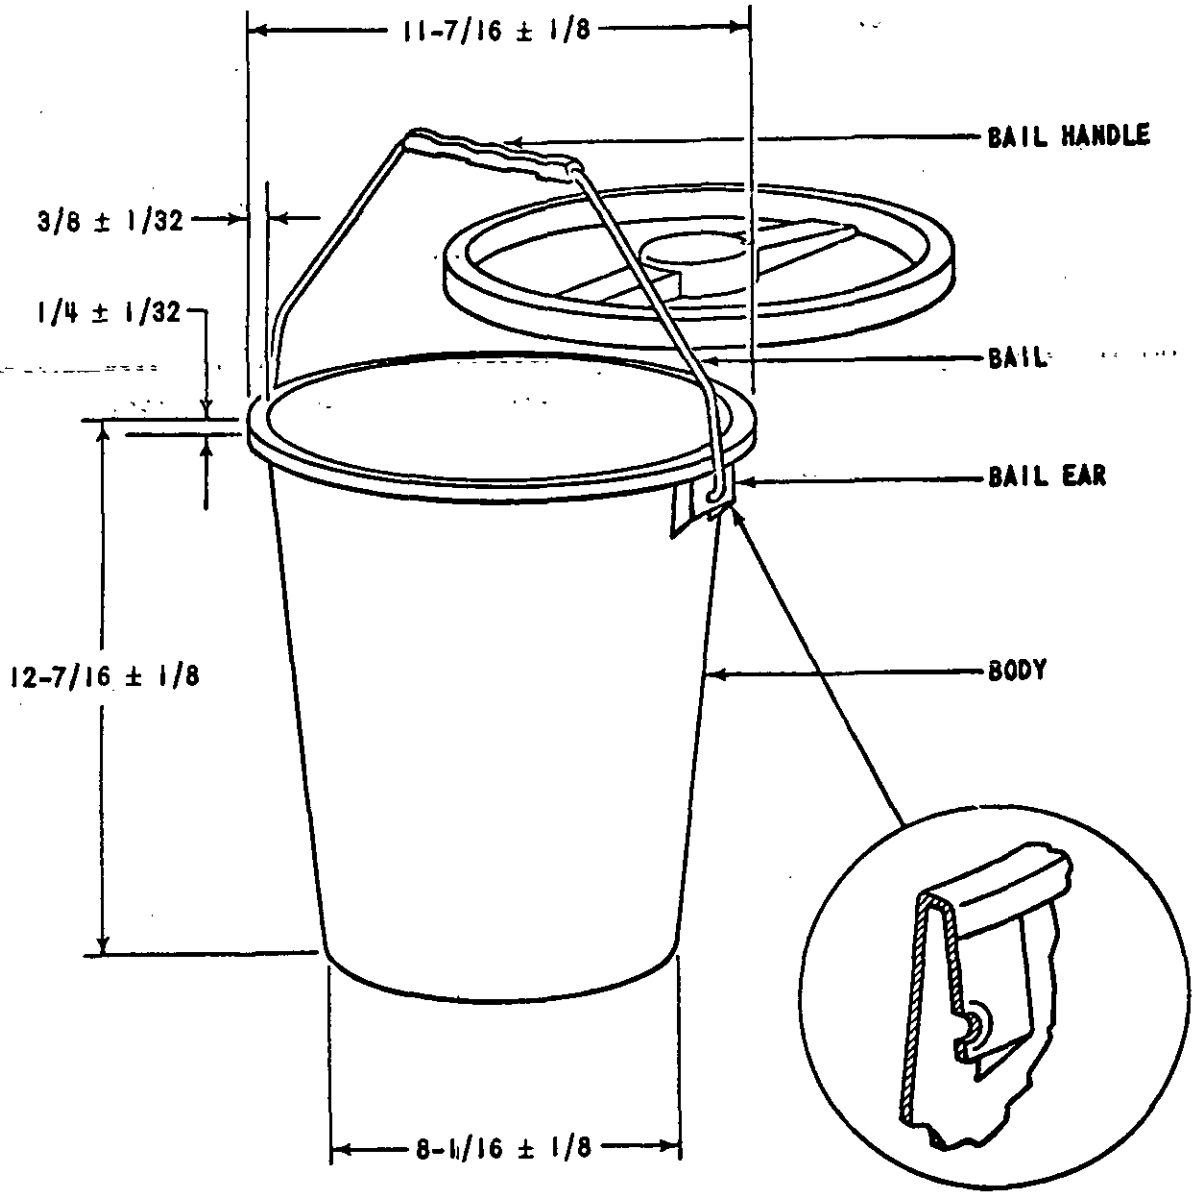



Figure 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:17Z
Check the source to verify that this is the current version before use.