
MILITARY SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG STYLE, MULTIPLE REMOVABLE TERMINI, DUST COVER, SCREW THREADS, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification and the latest issue of MIL-C-28876.

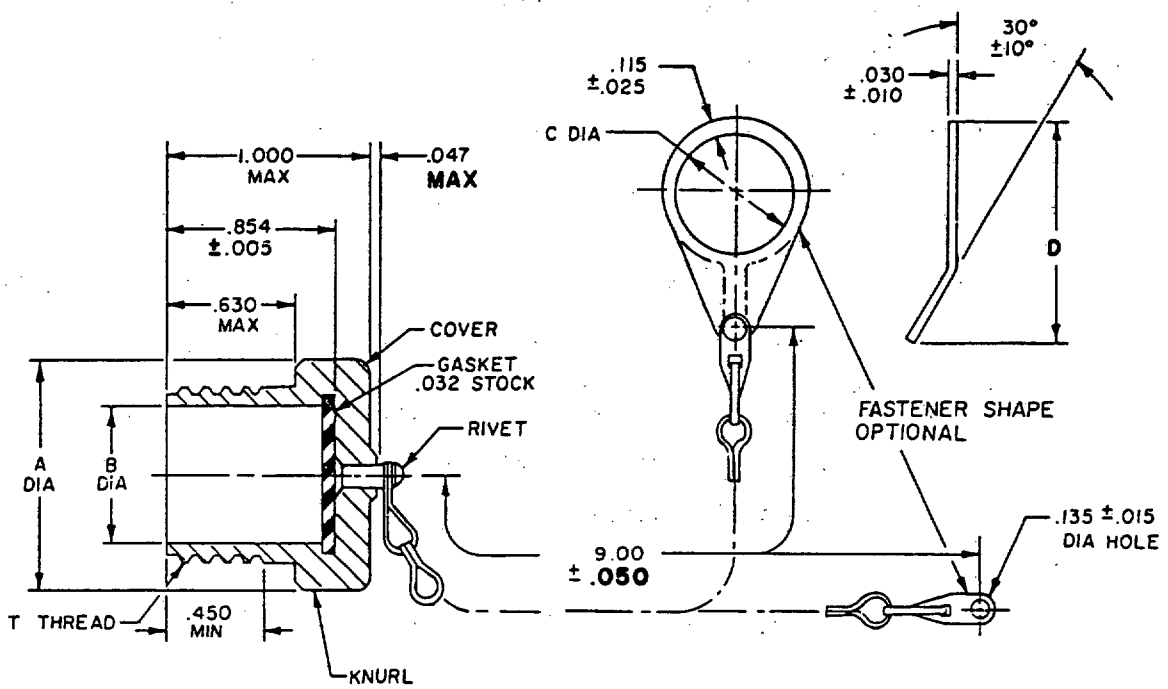

Shell size	T Thread class 2A	A dia max		B dia		C dia		D max	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm
11	.750-IP-.2L-D.S.	1.028	26.21	.581 .569	14.75 14.45	.775 .755	19.68 19.17	1.650	41.91
13	.875-IP-.2L-D.S.	1.141	28.98	.705 .693	17.90 17.60	.900 .880	22.86 22.35	1.800	45.72
15	1.062-IP-.2L-D.S.	1.263	32.08	.877 .865	22.27 21.97	1.025 1.005	26.03 25.52	1.950	49.53

Inches	mm
.005	0.13
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.032	0.81
.047	1.19
.050	1.27
.115	2.92
.135	3.43
.450	11.43
.630	16.00
.854	21.69
1.000	25.40
9.000	228.60

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.

FIGURE 1. Plug dust cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mass: 2.5 ounces maximum.

Material:

Ring: Stainless steel, passivated, .030 maximum thickness.

Cover: Impact extruded or machined aluminum alloy.

Disk: Silicone elastomer or silicone rubber per ZZ-R-765.

Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.

Wire rope: Insulated, coated, braided steel wire.

Fastener: Stainless steel, passivated.

Finish:

Aluminum components: Cadmium plate, olive drab over electroless nickel.

Stainless steel components, class 316: Cadmium plate, black.

Stainless steel components, class 302 through 304: Chain and fastener attachments to be cadmium plate, per QQ-P-416, type 1, class 3.

Chain or wire rope shall be free to rotate on rivet.

Gasket shall be mechanically captive to the cover.

Part number:

M28876/10 A,B,or C 1,2,or 3 W or D

Basic specification

Shell size designator letter

A = shell size 11
B = shell size 13
C = shell size 15

Chain attachment

1 = chain
2 = chain and ring
3 = rope
4 = without chain or rope

Material and finish

W - Aluminum with cadium plate, olive drab over electroless nickel.

D - Stainless steel with cadmium plate, black.

Part number example: M228876/10-A1W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Patent notice: The Government does not have a royalty-free license under the following patents for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government:

Patent application number	Patent number
US (65,032)	US 4,330,965
US (260,660)	
US (376,866)	
US (403,446)	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, MC, SH
Air Force - 11, 17, 19, 80, 90, 99
NASA - NA
DLA - ES

User activities:
Navy - OS, YD
Air Force - 13, 14

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0076-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.