
INCH-POUND
MIL-PRF-28876/10G
1 March 2021
SUPERSEDING
MIL-PRF-28876/10F
4 October 2004

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG STYLE, MULTIPLE REMOVABLE TERMINI, DUST COVER, SCREW THREADS, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-28876.

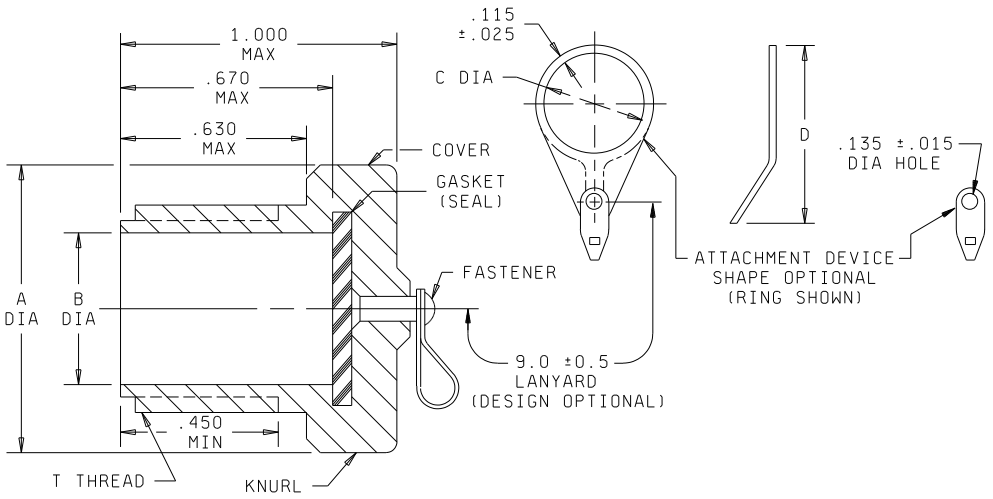

Inches	Millimeters	Inches	Millimeters
0.005	0.13	0.050	1.27
0.010	0.25	0.115	2.92
0.015	0.38	0.135	3.43
0.025	0.64	0.450	11.43
0.030	0.76	0.630	16.00
0.032	0.81	0.670	17.02
0.047	1.19	1.000	25.40

FIGURE 1. Plug dust cover.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Shell size	T thread class 2A	A dia max	B dia	C dia	D max
11	0.750-0.1P-0.2L-D.S	1.028 (26.11)	0.581 (14.75)	0.775 (19.68)	1.650 (41.91)
			0.569 (14.45)	0.755 (19.17)	
13	0.875-0.1P-0.2L-D.S	1.141 (28.98)	0.705 (17.90)	0.900 (22.86)	1.800 (45.72)
			0.693 (17.60)	0.880 (22.35)	
15	1.062-0.1P-0.2L-D.S	1.263 (32.08)	0.877 (22.27)	1.025 (26.03)	1.950 (49.53)
			0.865 (21.97)	1.005 (25.53)	
23	1.500-0.1P-0.2L-D.S	1.703 (43.26)	1.299 (32.99)	1.463 (37.16)	2.483 (63.07)
			1.287 (32.69)	1.443 (36.65)	

NOTES:

1. Dimensions are in inches.
2. Metric equivalents(mm) are given in parentheses for general information only.
3. Dimensions apply to plated/finished part.

FIGURE 1. Plug dust cover - Continued.

REQUIREMENTS:

Dimensions. See figure 1 herein.

Weight. 2.5 ounces (70.875 g), maximum.

Lanyard. Lanyard shall be free to rotate on fastener.

Gasket. Gasket shall be mechanically captive to the cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Part or Identification Number (PIN).

M	**28876**	**/10**	**X**	**X**	**X**
Prefix for military specification	Specification number	Spec sheet no.	Shell size designator (see table 1)	Lanyard attachment (see table 1)	Class designator (see table I)

TABLE I. PIN designators.

Shell size designator		**Lanyard attachment**		**Class designator**	
A	Shell size 11	A	Chain with fastener	T	Aluminum with conductive plating
B	Shell size 13	B	Chain with ring	blank	Aluminum with non-conductive finish
C	Shell size 15	C	Rope with fastener		
F	Shell size 23	D	Rope with ring		
		E	Without chain or rope		

Example: M28876/10BC

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
DLA – CC

Preparing activity:
Navy – SH
(Project 6060-2014-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.