
INCH-POUND
MIL-PRF-28876/11F
1 March 2021
SUPERSEDING
MIL-PRF-28876/11E
4 October 2004

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, RECEPTACLE STYLE, MULTIPLE REMOVABLE TERMINI, SCREW THREADS, JAMNUT MOUNTING, WITHOUT BACKSHELL, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-28876.

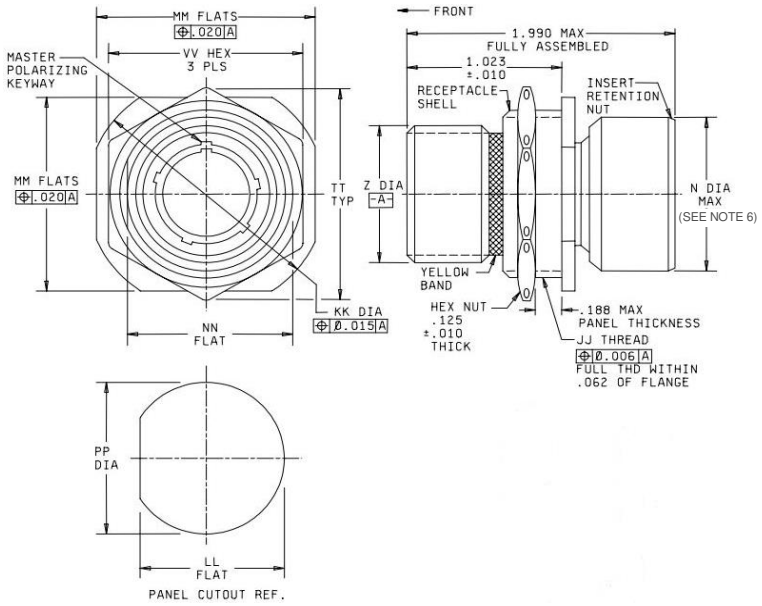

Inches	Millimeters
0.006	0.15
0.010	0.25
0.015	0.38
0.020	0.51
0.062	1.57
0.115	2.92
0.125	3.18
0.188	4.78
1.023	25.98
1.990	50.55

FIGURE 1. Jamnut receptacle connector.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Shell size	LL	KK	MM	Z dia max	NN flat	PP dia	TT hex corner max	VV hex nut	JJ thread class 2A	Insert figure 1/
11	0.853 (21.67)	1.368 (34.75)	1.274 (32.36)	0.750 (19.05)	0.841 (21.36)	0.890 (22.61)	1.290 (32.77)	1.079 (27.41)	0.8750-20 UNEF	B-1
	0.843 (21.41)	1.348 (34.24)	1.254 (31.85)		0.832 (21.13)	0.880 (22.35)		1.045 (26.54)		
13	0.978 (24.84)	1.508 (38.30)	1.399 (35.53)	0.875 (22.22)	0.966 (24.54)	1.015 (25.78)	1.435 (36.45)	1.205 (30.61)	1.0000-20 UNEF	B-2
	0.968 (24.59)	1.488 (37.80)	1.379 (35.03)		0.957 (24.31)	1.005 (25.53)		1.171 (29.74)		
15	1.165 (29.59)	1.681 (42.70)	1.587 (40.31)	1.062 (26.97)	1.153 (29.29)	1.203 (30.56)	1.650 (41.91)	1.392 (35.36)	1.1875-18 UNEF	B-3 or B-4
	1.155 (29.34)	1.661 (42.19)	1.567 (39.80)		1.144 (29.06)	1.193 (30.30)		1.358 (34.49)		
23	1.598 (40.59)	2.108 (53.54)	2.014 (51.66)	1.500 (38.10)	1.587 (40.31)	1.635 (41.53)	2.093 (53.16)	1.812 (46.02)	1.6250-18 UNEF	B-5 or B-6
	1.588 (40.34)	2.088 (53.04)	1.994 (50.65)		1.578 (40.08)	1.625 (41.28)		1.778 (45.16)		

FOOTNOTE:

1/ For insert arrangement, see the indicated figure in Appendix B of MIL-PRF-28876.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (mm) are given in parentheses for general information only.
3. Dimensions apply to plated/finished part.
4. Identification marking shall be in accordance with 3.10.3 of MIL-PRF-28876.
5. Connector insert retention nut internal configuration not shown. The insert retention nut shall be in accordance with figure A-8 of MIL-PRF-28876.
6. See appendix A of MIL-PRF-28876 for N DIA dimensioning.
7. Hex nut safety wire holes shall be in accordance with MIL-PRF-28876.

FIGURE 1. Jamnut receptacle connector - Continued.

REQUIREMENTS:

Dimensions and keying configurations. See figure 1 herein and figures A-2, A-3, A-5, and A-6 of MIL-PRF-28876.

Weight (without termini).

Shell size	Weight, ounces (grams) max
11	2.0 (56.7)
13	2.5 (70.875)
15	3.0 (85.05)
23	4.3 (121.905)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Fiber optic cable diameter. 0.094 inch (2.39 millimeters), maximum (to each termini location).

Protective caps. Each connector shall be supplied with protective caps over the front and rear portions of the connector.

Insert arrangement. See appendix B of MIL-PRF-28876 for desired shell size.

Termini. Style P (pin) or S (socket) (see MIL-PRF-29504/14 and MIL-PRF-29504/15). (For dummy terminus, see MIL-PRF-29504/3.)

Insert retention nut. Unless otherwise specified in the Part or Identifying Number (PIN), insert retention nut and intergral or separate insert retaining sleeve supplied with the connector.

Shell polarization. 1 through 6 keyway positions (see figure A-3 of MIL-PRF-28876).

Class designator. Unless otherwise specified in the PIN, shall be aluminum with non-conductive finish.

PIN. Marked on flange of receptacle (see table I).

M	**28876**	**/11**	**X**	**X**	**X**	**X**	**X**	**X**
Prefix for military specification	Spec number	Spec sheet no.	Shell size designator (see table I)	Insert arrangement number (see table I)	Terminus/ insert style (see table I)	Key position number (see table I)	Backshell designator (see table I)	Class designator (see table I)

TABLE I. PIN designators.

Shell size	Shell size designator	Insert arrangement number	Terminus/ insert style	Key position	Backshell designator (see table II)	Class designator (see table III)
11	A	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	A or blank
13	B	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	A or blank
15	C	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	A or blank
23	F	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	A or blank

TABLE II. Backshell designators.

Backshell designator	Receptacle configured with:
Blank	Insert retention nut
N	No insert retention nut

TABLE III. Class designators.

Class designator	Description
Blank	Aluminum with non-conductive finish
T	Aluminum with conductive plating

Example: M28876/11B1S1N

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.

Sealing gasket or O-ring. The receptacle shall include a sealing gasket or O-ring to seal between the receptacle flange and the mounting panel.

Mating counterpart. Plug connectors are specified in MIL-PRF-28876/6 through MIL-PRF-28876/9. Dust covers are specified in MIL-PRF-2886/15.

Installation and removal tools. As specified in Drawing 499-6872813.

NOTES:

Referenced documents. In addition to MIL-PRF-28876, this specification sheet references the following documents:

MIL-PRF-28876/6	MIL-PRF-28876/7	MIL-PRF-28876/8
MIL-PRF-28876/9	MIL-PRF-29504/3	MIL-PRF-29504/14
MIL-PRF-29504/15	Drawing 499-6872813	

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
DLA – CC

Preparing activity:
Navy – SH
(Project 6060-2014-034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:32Z
Check the source to verify that this is the current version before use.