INCH-POUND


MIL-C-28876/15D
9 JULY 1992
SUPERSEDING
MIL-C-28876/15C
21 March 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, RECEPTACLE STYLE, MULTIPLE REMOVABLE TERMINI, DUST COVER, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28876.

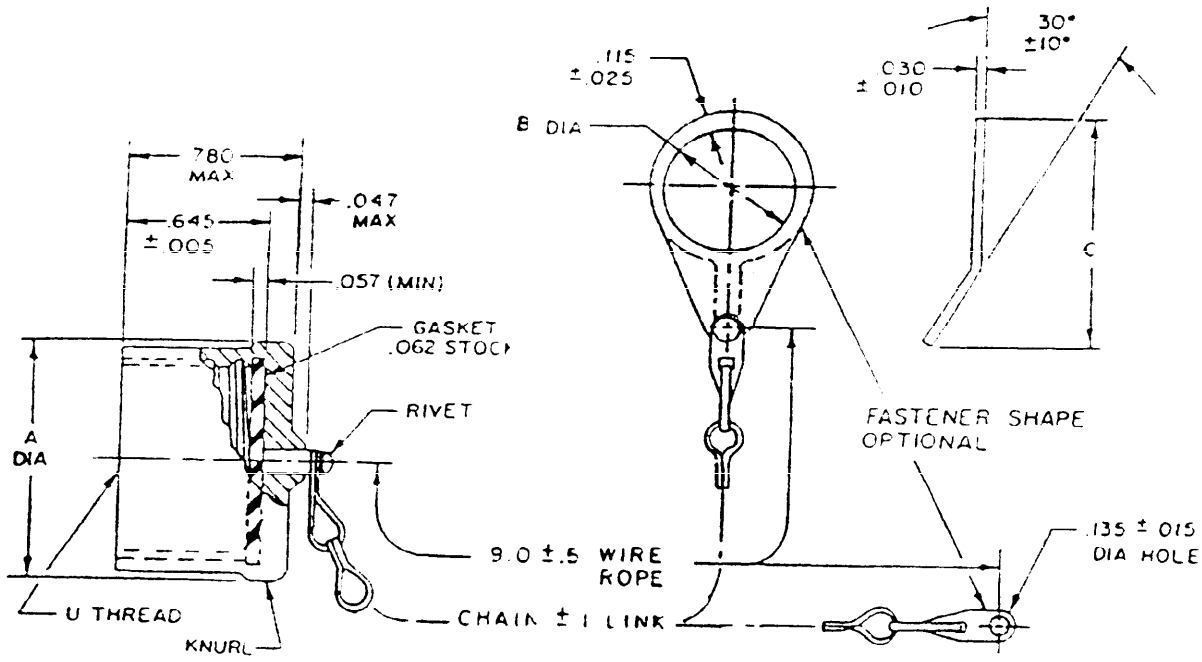

Inches	mm	Inches	mm
.005	0.13	.062	1.57
.010	0.25	.115	2.92
.015	0.38	.135	3.43
.025	0.64	.645	16.38
.030	0.76	.780	19.81
.050	1.27	1.000	25.40
.057	1.45	9.000	228.60

FIGURE 1. Receptacle dust cover.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T20:34Z
Check the source to verify that this is the current version before use.

Shell Size	U thread class 2B	A dia max		B dia		C max	
		Inches	mm	Inches	mm	Inches	mm
11	.750-1P-.2L-D.S	1.028	26.21	.900 .880	22.86 22.35	1.800	45.72
13	.875-1P-.2L-D.S	1.141	28.98	1.025 1.005	26.03 25.52	1.950	49.53
15	1.062-1P-.2L-D.S	1.263	32.08	1.213 1.193	30.81 30.30	2.050	52.07
23	1.500-1P-.2L-D.S	1.703	43.51	1.463 1.443	37.16 36.66	2.483	63.07

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.

FIGURE 1. Receptacle dust cover - Continued.

REQUIREMENTS:

Temperature: Range 1 (-54°C to +65°C operating, -62°C to +71°C storage).

Dimensions and configuration: See figure 1.

Weight: 2.5 ounces maximum.

Material:

Ring: Stainless steel, passivated, .030 inch (0.76 mm) maximum thickness.

Cover: Impact extruded or machined aluminum alloy.

Disk: Silicone elastomer or silicone rubber in accordance with ZZ-R-765 or fluorosilicone in accordance with MIL-R-25988, type I, class 1.

Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.

Wire rope: Insulated, coated, braided steel wire.

Fastener: Stainless steel, passivated.

Finish:

Aluminum cover: Cadmium plate, olive drab over electroless nickel.

Stainless steel components, class 316: Cadmium plate, black.

Stainless steel components, class 302 through 304:

Chain: Cadmium plate, in accordance with QQ-P-416, type 1, class 3.


Fastener attachments: Passivated in accordance with QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 202610-20T20:34Z
Check the source to verify that this is the current version before use.

Chain or wire rope shall be free to rotate on rivet.

Gasket shall be mechanically captive to the cover.

Part or Identifying Number (PIN):

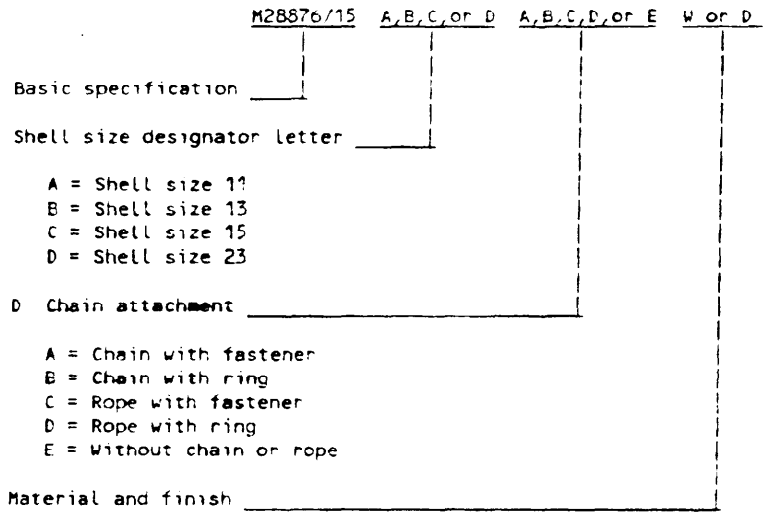

PIN example: M28876/15-ABW.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85
NASA - NA

Review activities:
Army - MI
Navy - AS, MC
Air Force - 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - OS, YD
Air Force - 13, 14

Preparing activity:
Navy - SH

Agent:
DLA - ES

(Project 6060-0093-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:34Z
Check the source to verify that this is the current version before use.