
MILITARY SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG AND RECEPTACLE STYLE, MULTIPLE REMOVABLE TERMINI, RECEPTACLE, SCREW THREADS, WALL MOUNTING, WITH 90° STRAIN RELIEF, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification and the latest issue of MIL-C-28876.

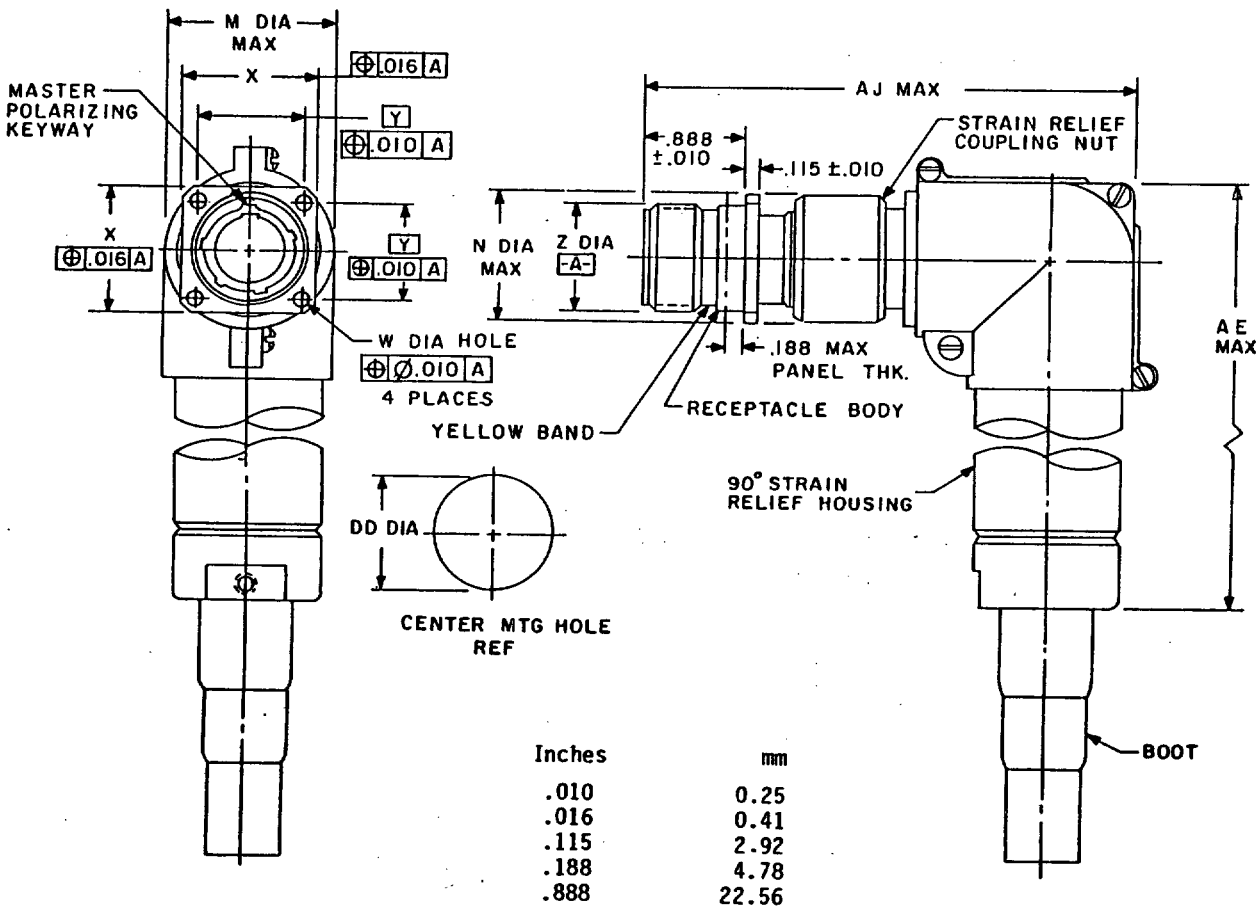

Inches	mm
.010	0.25
.016	0.41
.115	2.92
.188	4.78
.888	22.56

FIGURE 1. Receptacle connector with 90° backshell strain relief.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

Shell size	N dia max	W	X	Y	Z dia max	M dia max	AE max	AJ max	DD dia ref	For insert arrangement MIL-STD-2163 Figure	Color band EIA RS5359
11	.960 (24.38)	.130 (3.30) .115 (2.92)	1.043 (26.49) 1.001 (25.43)	.750 (19.05)	.750 (19.05)	1.050 (26.67)	4.250 (107.95)	4.250 (107.95)	.812 (20.62)	1	Yellow
13	1.085 (27.55)	.130 (3.30) .115 (2.92)	1.158 (29.41) 1.116 (28.35)	.843 (21.41)	.875 (22.22)	1.050 (26.67)	4.250 (107.95)	4.250 (107.95)	.937 (23.80)	2	Yellow
15	1.255 (31.88)	.130 (3.30) .115 (2.92)	1.278 (32.46) 1.236 (31.39)	.968 (24.59)	1.062 (26.97)	1.550 (39.37)	4.500 (114.30)	4.500 (114.30)	1.124 (28.55)	3	Yellow

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply after plating.
4. Metric equivalents (mm) are in parentheses.

FIGURE 1. Receptacle connector with 90° backshell strain relief - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and MIL-C-28876, figures 4 and 8.

Mass: 14.5 ounces maximum.

Insert arrangement: See MIL-STD-2163 for desired shell size.

Termini: Style P (pin) or S (socket). See MIL-C-28876/16 and MIL-C-28876/17. (For dummy terminus see MIL-C-28876/18.)

Shell polarization: 1 through 6 keyway positions. See MIL-C-28876, figure 5.

Marking:

Part number: Marked on flange of receptacle (see table I).

M28876/4 B 1 2 P 1

Basic part number

Shell size designator letter

Insert arrangement number

Keying position number

Terminus style letter

Backshell dash number

TABLE I. Part number designators.

Shell size	Designator	Insert arrangement number	Termini	Key position	Cable outer diameter, backshell dash number		
					1	2	3
11	A	1	P or S	1, 2, 3, 4, 5, or 6	.250 (6.35) .240 (6.09)		
13	B	1	P or S	1, 2, 3, 4, 5, or 6	.300 (7.62) .290 (7.36)		
15	C	1 or 2	P or S	1, 2, 3, 4, 5, or 6	.515 (13.08) .495 (12.57)	.260 (6.66) .235 (6.02)	.385 (9.78) .365 (9.27)

Color bands: See EIA RS359.

Mating counterpart: Plug connectors specified in MIL-C-28876/6 through MIL-C-28876/9.

Installation and removal tools: As specified in MIL-I-81969/46 through MIL-I-81969/49 and MIL-T-83523/5 through MIL-T-83523/8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

Quality conformance and periodic inspections: The following cables shall be used for quality conformance and periodic inspections:

Shell size	Cables
A	Siecor part number 277-R, 2-channel, 50 micron core, 125 clad, or equal.
B	Siecor part number 477-R, 4-channel, 100 micron core, 140 clad, or equal.
C	Belden part number 229626, 8-channel, 100 micron core, 140 clad, or equal.

For quality conformance and periodic inspections, dummy termini shall be used in all unused cavities.

Patent notice: The Government does not have a royalty-free license under the following patents for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government:

Patent application no.	Patent no.
US (65,032)	US 4,330,955
US (260,660)	
US (376,866)	
US (403,446)	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, MC, SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - OS, YD
Air Force - 13, 14

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6060-0045-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.