INCH-POUND
MIL-PRF-28876/6F
w/AMENDMENT 1
17 May 2022
SUPERSEDING
MIL-PRF-28876/6F
1 March 2021

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG STYLE, MULTIPLE REMOVABLE TERMINI, SCREW THREADS, WITHOUT BACKSHELL, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-28876.

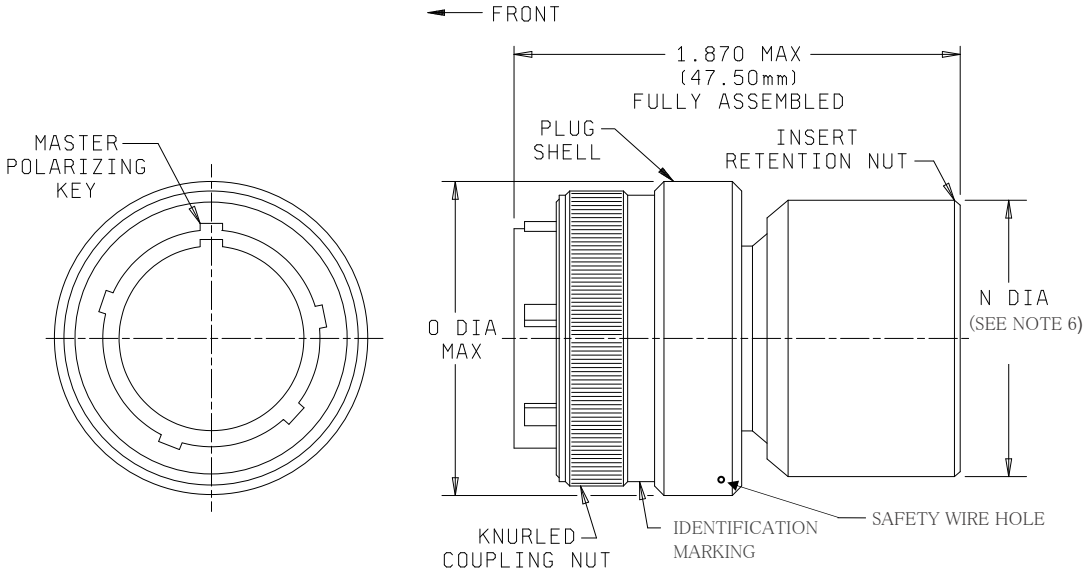


FIGURE 1. Plug connector.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

Shell size	O dia max	Insert figure 1/
11	1.028 (26.11)	B-1
13	1.141 (28.98)	B-2
15	1.263 (32.08)	B-3 or B-4
23	1.705 (43.31)	B-5 or B-6

FOOTNOTE:

1/ For insert arrangement, see the indicated figure in appendix B of MIL-PRF-28876.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (mm) are given in parentheses for general information only.
3. Dimensions apply to plated/finished part.
4. Identification marking shall be in accordance with 3.10.3 of MIL-PRF-28876.
5. Connector insert retention nut internal configuration not shown. The insert retention nut shall be in accordance with figure A-8 of MIL-PRF-28876.
6. See appendix A of MIL-PRF-28876 for N DIA dimensioning.
7. Safety wire holes shall be in accordance with MIL-PRF-28876.

FIGURE 1. Plug connector - Continued.

REQUIREMENTS:

Dimensions and keying configurations. See figure 1 herein and figures A-2, A-3, A-5, A-6, and A-7 of MIL-PRF-28876.

Weight (without termini).

Shell Size	Weight, ounces (grams) max
11	2.0 (56.7)
13	2.5 (70.875)
15	3.0 (85.05)
23	4.3 (121.905)

Fiber optic cable diameter. 0.094 inch (2.4 millimeters), maximum (to each termini location).

Protective caps. Each connector shall be supplied with protective caps over the front and rear portions of the connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

Insert arrangement. See appendix B of MIL-PRF-28876 for desired shell size.

Termini. Style P (pin) or S (socket) (see MIL-PRF-29504/14 and MIL-PRF-29504/15). (For dummy terminus, see MIL-PRF-29504/3.)

Insert retention nut. Unless otherwise specified in the Part or Identification Number (PIN), insert retention nut and integral or separate insert retaining sleeve supplied with the connector.

Shell polarization. 1 through 6 keyway positions (see figure A-3 of MIL-PRF-28876).

PIN. Marked on coupling nut of plug (see table I).

M	**28876**	**/6**	**X**	**X**	**X**	**X**	**X**	**X**
Prefix for military specification	Specification number	Spec sheet no.	Shell size designator (see table I)	Insert arrangement number (see table I)	Terminus/insert style (see table I)	Key position number (see table I)	Backshell designator (see table I)	Class designator (see table I)

TABLE I. PIN designators.

Shell size	Shell size designator	Insert arrangement number	Terminus/insert style	Key position	Backshell designator (see table II)	Class designator (see table III)
11	A	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
13	B	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
15	C	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
23	F	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank

TABLE II. Backshell designators.

Backshell designator	Configured with
Blank	Insert retention nut
N	No insert retention nut
NOTE: 1. Including integral or separate insert retaining sleeve.	

TABLE III. Class designators.

Class designator	Description
Blank	Aluminum with non-conductive finish
T	Aluminum with conductive plating

Example: M28876/6B1P1N

Mating counterpart. Receptacle connectors are specified in MIL-PRF-28876/1 through MIL-PRF-28876/5 and MIL-PRF-28876/11 through MIL-PRF-28876/14. Dust covers are specified in MIL-PRF-28876/10.

Installation and removal tools. As specified in Drawing 499-6872813.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.

NOTES:

Referenced documents. In addition to MIL-PRF-28876, this specification sheet references the following documents:

MIL-PRF-28876/1	MIL-PRF-28876/2	MIL-PRF-28876/3
MIL-PRF-28876/4	MIL-PRF-28876/5	MIL-PRF-28876/10
MIL-PRF-28876/11	MIL-PRF-28876/12	MIL-PRF-28876/13
MIL-PRF-28876/14	MIL-PRF-29504/3	MIL-PRF-29504/14
MIL-PRF-29504/15	Drawing 499-6872813	

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
DLA – CC

Preparing activity:
Navy – SH
(Project 6060-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:29Z
Check the source to verify that this is the current version before use.